


SA6010



Flow sensor

SAN12XDBFRKG/US-100

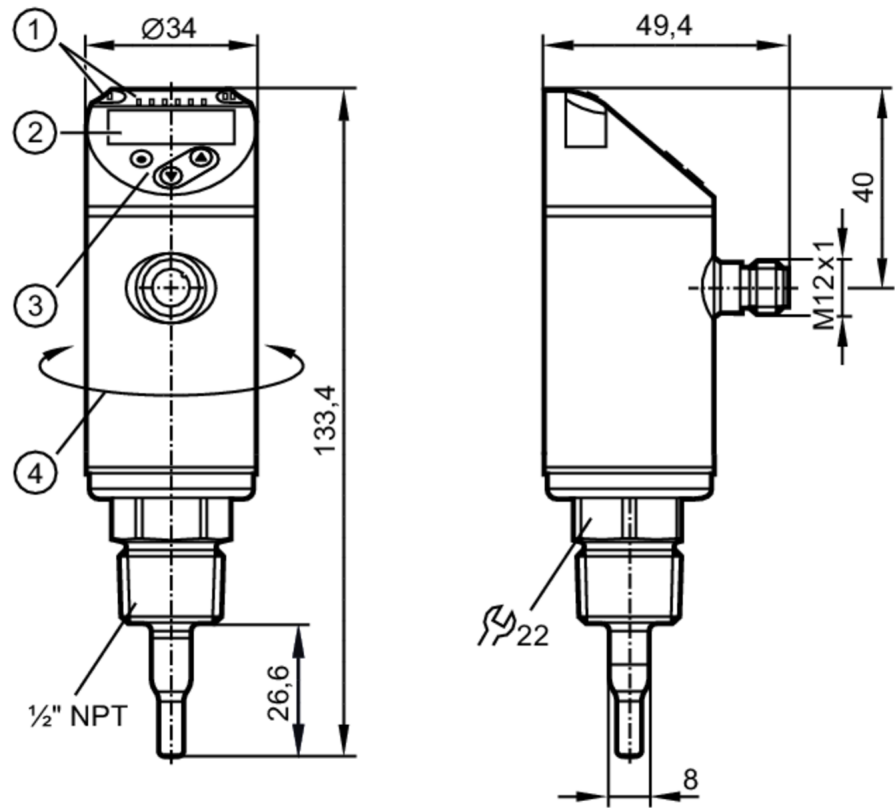

- 1 LEDs Display unit / Switching status
- 2 alphanumeric display 4-digit red/green
- 3 Programming buttons
- 4 upper part of the housing can be rotated 345°



Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1
Process connection	threaded connection 1/2" NPT external thread

Application

System	gold-plated contacts		
Media	water; glycol solutions; air; oils		
Note on media	low-viscosity oils with viscosity: $\leq 40 \text{ mm}^2/\text{s}$ (104 °F)		
	high-viscosity oils with viscosity: $> 40 \text{ mm}^2/\text{s}$ (104 °F)		
Medium temperature [°F]	-4...194		
Pressure rating	100 bar	1450 psi	10 MPa
MAWP (for applications according to CRN) [bar]	100		

Electrical data

Operating voltage [V]	18...30 DC
Current consumption [mA]	< 100
Protection class	III
Reverse polarity protection	yes

SA6010



Flow sensor

SAN12XDBFRKG/US-100

Power-on delay time	[s]	10
Measuring principle		calorimetric
Inputs / outputs		
Number of inputs and outputs		Number of digital outputs: 2; Number of analog outputs: 1
Outputs		
Total number of outputs		2
Output signal		switching signal; analog signal; frequency signal; IO-Link; (configurable)
Electrical design		PNP/NPN
Number of digital outputs		2
Output function		normally open / closed; (configurable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Number of analog outputs		1
Analog current output	[mA]	4...20; (scalable)
Max. load	[Ω]	350
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Frequency of the output	[Hz]	0...1000
Measuring/setting range		
Probe length L	[mm]	26.6
Operating mode		relative; absolutely liquid; absolutely gaseous; (absolute: reference measurement recommended; Factory setting: relative)
Temperature monitoring		
Measuring range	[°F]	-4...194
Resolution	[°F]	0.5
Liquid media - absolute operating mode		
Setting range	[ft/s]	0...9.85
Greatest sensitivity	[ft/s]	0.15...9.85
Liquid media - relative operating mode		
Setting range	[ft/s]	0...19.5
Greatest sensitivity	[ft/s]	0.15...9.85
Gases - operating mode "absolute"		
Setting range	[ft/s]	0...328
Greatest sensitivity	[ft/s]	6...328
Gases - operating mode "relative"		
Setting range	[ft/s]	0...656
Greatest sensitivity	[ft/s]	6...328
Accuracy / deviations		
Temperature drift	[cm/s x 1/K]	0,01 fps x 1/K (< 68 °F; > 158 °F)

SA6010



Flow sensor

SAN12XDBFRKG/US-100

Max. temperature gradient of[K/min] medium		100	
Absolute operating mode			
Repeatability		0,05 m/s; (water; Flow velocity: 0,05...3 m/s)	
Relative operating mode			
Accuracy		± (7 % MW + 2 % MEW); (for relative mode in the range of maximum sensitivity under the following conditions:; water: 68...158 °F; inlet length: 5 ft; DN25 (DIN 2448); mounting position according to instructions; Accuracy can differ for other media and mounting positions.)	
Repeatability		0,05 m/s; (water; Flow velocity: 0,05...3 m/s)	
Temperature monitoring			
Temperature drift		± 0,003 K/°F	
Accuracy [K]		± 0,3 / ± 1; (water; Flow velocity: 1...9,85 fps / air; Flow velocity: > 32,8 fps)	
Reaction times			
Response time [s]		0.5; (T09; water; glycol: 0,8 s; air: 7 s; oil: 1,8 s; each T09)	
Temperature monitoring			
Dynamic response T05 / T09 [s]		1,5 (T09); (water; Flow velocity: 1...9,85 fps)	
Software / programming			
Parameter setting options		hysteresis / window; normally open / closed; switching logic; current/frequency output; medium selection; Damping; Teach function; display can be rotated and switched off; standard unit of measurement; process value color	
Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1	
SDCI standard		IEC 61131-9	
Profiles		Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis	
SIO mode		yes	
Required master port class		A	
Process data analog		2	
Process data binary		2	
Min. process cycle time [ms]		3	
Supported DeviceIDs		Type of operation	DeviceID
		Factory setting / ModE = (REL)	537
		ModE = (GAS)	551
		ModE = (LIQU)	544
Operating conditions			
Ambient temperature [°F]		-40...176	
Storage temperature [°F]		-40...212	
Protection		IP 65; IP 67	
Tests / approvals			
EMC		DIN EN 60947-5-9	
Shock resistance		DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance		DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF [years]		143	

SA6010



Flow sensor

SAN12XDBFRKG/US-100

UL approval	UL approval number	I003
	File number UL	E174189

Mechanical data		
Weight	[g]	251.5
Housing		tubular
Dimensions	[mm]	Ø 34 / L = 133.4
Material		stainless steel (1.4404 / 316L); stainless steel (1.4310 / 301); PBT-GF20; PBT-GF30
Materials (wetted parts)		stainless steel (1.4404 / 316L)
Process connection		threaded connection 1/2" NPT external thread
Probe diameter	[mm]	5
Installation length EL	[mm]	26.6

Displays / operating elements		
Display	Display unit	6 x LED, green (% , fps, gpm, cfm, °F, 10 ³)
	Switching status	2 x LED, yellow
	Measured values	alphanumeric display, red/green 4-digit

Remarks		
Remarks		MW = Measured value
		MEW = Final value of the measuring range
Pack quantity		1 pcs.

Electrical connection		
Connector: 1 x M12; coding: A; Contacts: gold-plated		
		



Flow sensor

SAN12XDBFRKG/US-100

Connection



Colors to DIN EN 60947-5-2

OUT1:

- Switching output Volumetric flow quantity monitoring
- Frequency output Volumetric flow quantity monitoring
- IO-Link

OUT2:

- Switching output Volumetric flow quantity monitoring
- Switching output Temperature monitoring
- analog output Volumetric flow quantity monitoring
- analog output Temperature monitoring
- Frequency output Volumetric flow quantity monitoring
- Frequency output Temperature monitoring
- Input External Teach

Core colors :

- BK = black
- BN = brown
- BU = blue
- WH = white