


SBY334



Flow sensor with fast response time

SBY34BF0BPKG/US

Please note the changed housing design!

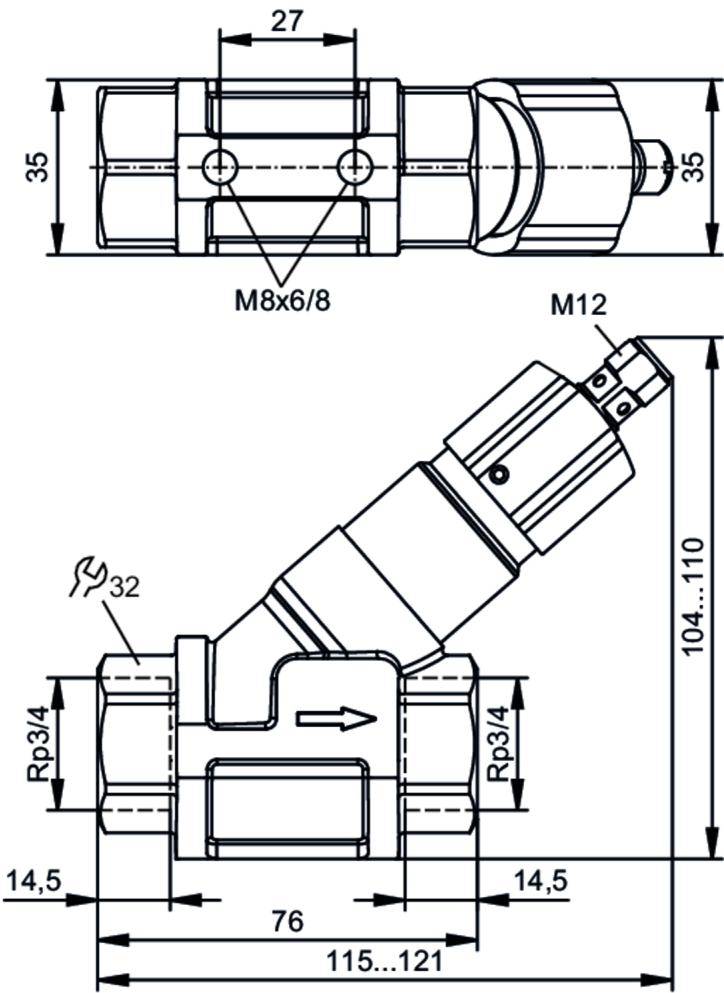

Product characteristics			
Number of inputs and outputs		Number of digital outputs: 1	
Process connection		threaded connection Rp 3/4 Internal thread	
Application			
Media		Liquids; water; glycol solutions; Coolants	
Medium temperature [°C]		0...85	
Pressure rating		40 bar	4 MPa
Electrical data			
Operating voltage [V]		10...30 DC; (to SELV/PELV)	
Current consumption [mA]		< 15	
Protection class		III	
Reverse polarity protection		yes	
Inputs / outputs			
Number of inputs and outputs		Number of digital outputs: 1	

SBY334



Flow sensor with fast response time

SBY34BF0BPKG/US

Outputs		
Total number of outputs	1	
Output signal	switching signal	
Electrical design	PNP	
Number of digital outputs	1	
Output function	normally open	
Max. voltage drop switching output DC [V]	2.5	
Permanent current rating of switching output DC [mA]	100	
Short-circuit protection	yes	
Overload protection	yes	
Measuring/setting range		
Setting range [l/min]	2...50	
Accuracy / deviations		
Repeatability [% of the final value]	1	
Hysteresis [l/min]	1...3	
Measuring error [% of the final value]	± 5	
Reaction times		
Response time [s]	< 0.01	
Operating conditions		
Ambient temperature [°C]	0...60	
Storage temperature [°C]	-15...80	
Protection	IP 65; IP 67	
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF [years]	3318	
Mechanical data		
Weight [g]	476.5	
Material	brass chemically nickel-plated; PP; aluminum anodized; PA	
Materials (wetted parts)	stainless steel (1.4310 / 301); stainless steel (1.4301 / 304); PBT; brass chemically nickel-plated; PP; PPS; Polyolefin; O-ring: FKM	
Process connection	threaded connection Rp 3/4 Internal thread	
Switching cycles mechanical	10 million	
Displays / operating elements		
Display	Switching status	4 x LED, yellow
Accessories		
Items supplied	Allen key	

SBY334




Flow sensor with fast response time

SBY34BF0BPKG/US


Remarks	
Remarks	Caution Do not turn the cap beyond the maximum value of the setting range.
	All data refer to water (20 °C).
Notes	Please note the changed housing design!
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A



Connection

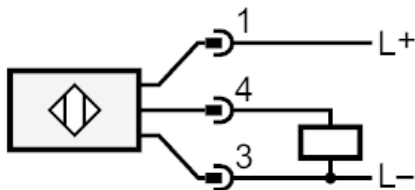

SBY334




Flow sensor with fast response time

SBY34BF0BPKG/US

Diagrams and graphs

Pressure loss

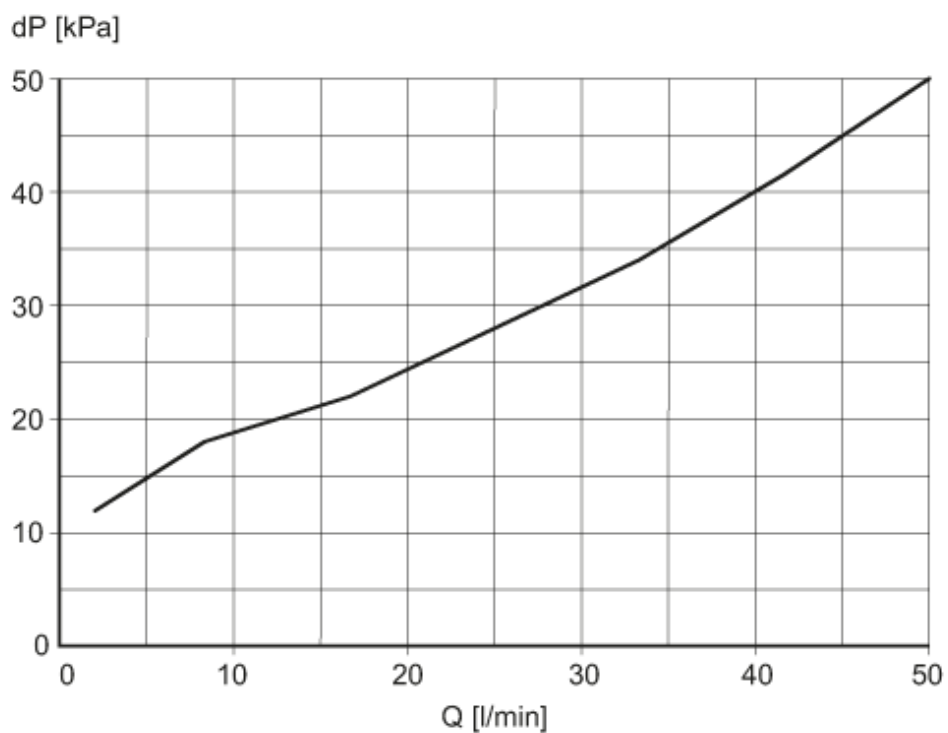

dP Pressure loss

Q volumetric flow quantity