


SBY434



Flow transmitters with fast response time

SBY34HF010KG/US

Please note the changed housing design!

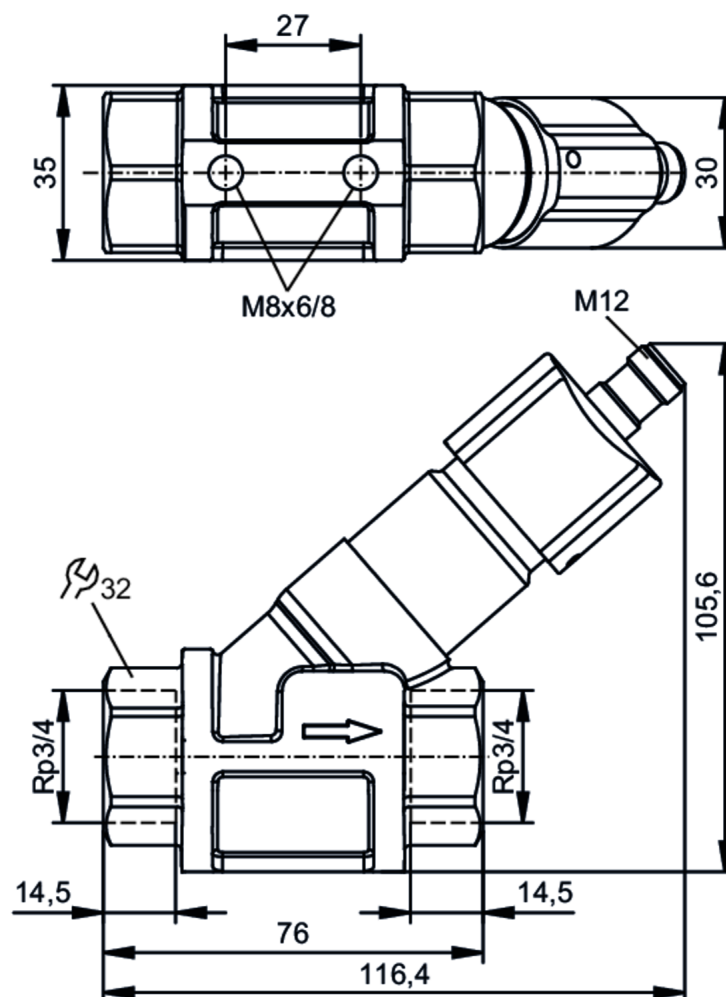

Product characteristics

Measuring range	[l/min]	2...50
Process connection		threaded connection Rp 3/4 Internal thread

Application

Media		Liquids; water; glycol solutions; Coolants
Medium temperature	[°C]	-10...100
Pressure rating	40 bar	4 MPa

Electrical data

Operating voltage	[V]	18...32 DC; (to SELV/PELV)
Current consumption	[mA]	< 35
Protection class		III
Reverse polarity protection		yes

Outputs

Output signal		analog signal
---------------	--	---------------



Flow transmitters with fast response time

SBY34HF010KG/US

Analog current output	[mA]	4...20
Max. load	[Ω]	500
Short-circuit protection		yes
Overload protection		yes
Measuring/setting range		
Measuring range	[l/min]	2...50
Accuracy / deviations		
Repeatability		1
[% of the final value]		
Measuring error		± 5
[% of the final value]		
Reaction times		
Response time	[s]	< 0.01
Operating conditions		
Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-15...80
Protection		IP 65; IP 67
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF	[years]	778
Mechanical data		
Weight	[g]	469
Material	brass chemically nickel-plated; PP; stainless steel (1.4404 / 316L); aluminum anodized; PA	
Materials (wetted parts)	stainless steel (1.4401 / 316); brass; brass chemically nickel-plated; PP; PPS; O-ring: FKM	
Process connection	threaded connection Rp 3/4 Internal thread	
Switching cycles mechanical	10 million	
Remarks		
Remarks	Recommendation Use 200 micron filtration	
	All data refer to water (20 °C).	
Notes	Please note the changed housing design!	
Pack quantity	1 pcs.	
Electrical connection		


Connector: 1 x M12; coding: A



Flow transmitters with fast response time


SBY34HF010KG/US

Connection

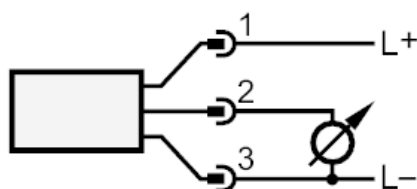

Diagrams and graphs

Pressure loss

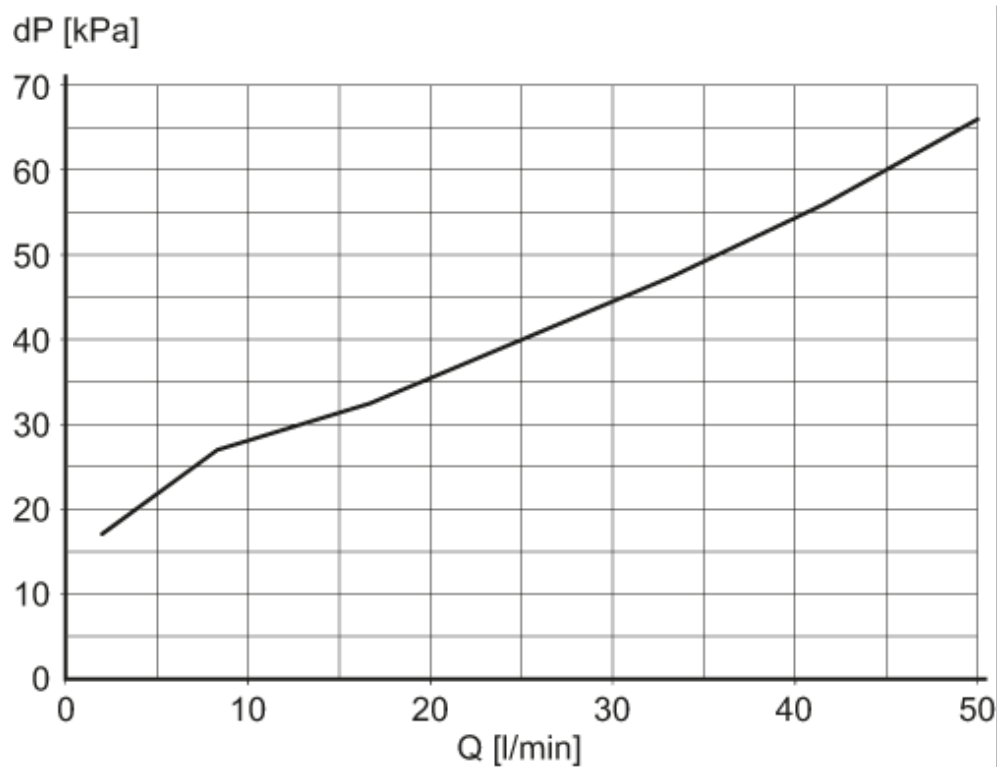

dP Pressure loss

Q volumetric flow quantity