




Flow transmitters with fast response time

SBY32HF010KG/US

Please note the changed housing design!

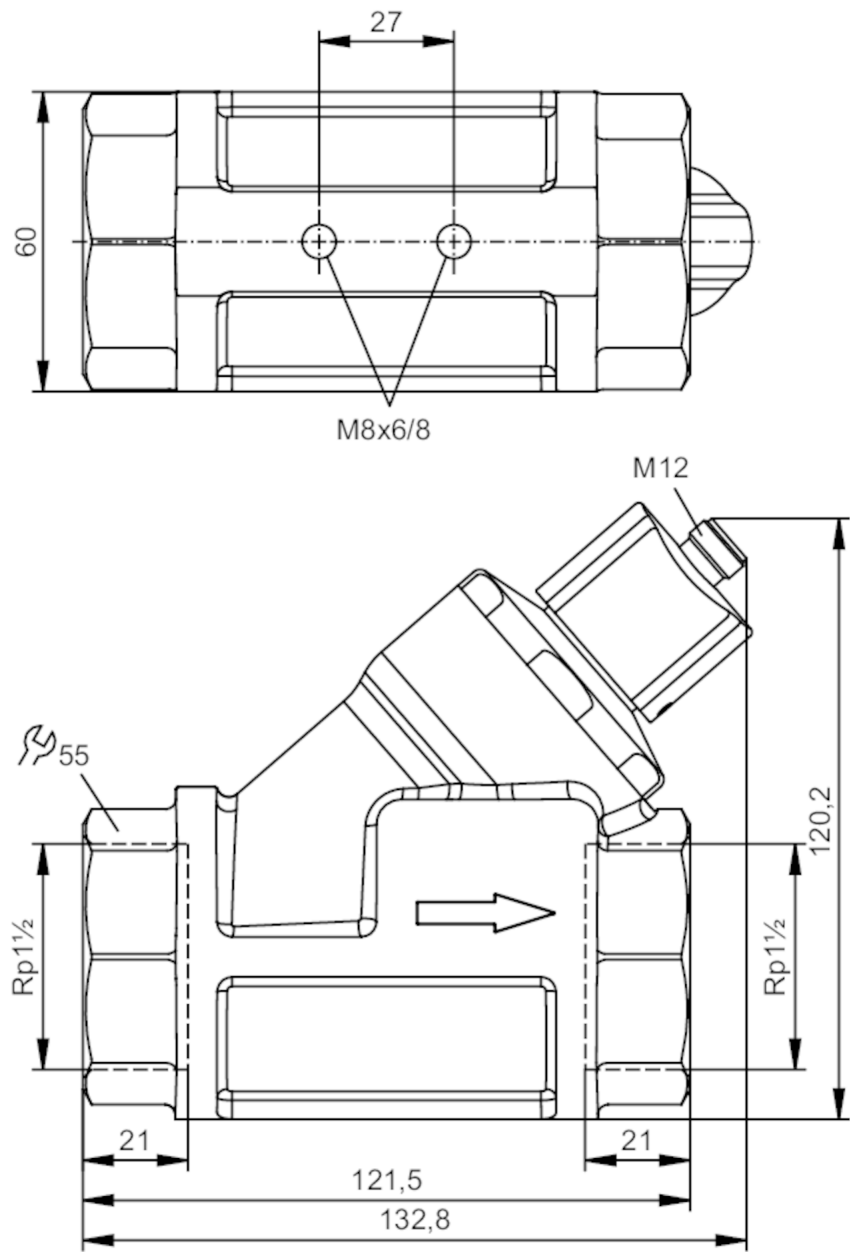

Product characteristics		
Measuring range	[l/min]	8...200
Process connection		threaded connection Rp 1 1/2 Internal thread
Application		
Media		Liquids; water; glycol solutions; Coolants
Medium temperature	[°C]	-10...100
Pressure rating	25 bar	2.5 MPa
Electrical data		
Operating voltage	[V]	18...32 DC; (to SELV/PELV)

SBY457



Flow transmitters with fast response time

SBY32HF010KG/US

Current consumption	[mA]	< 35
Protection class		III
Reverse polarity protection		yes
Outputs		
Output signal		analog signal
Analog current output	[mA]	4...20
Max. load	[Ω]	500
Short-circuit protection		yes
Overload protection		yes
Measuring/setting range		
Measuring range	[l/min]	8...200
Accuracy / deviations		
Repeatability		1
	[% of the final value]	
Measuring error		± 5
	[% of the final value]	
Reaction times		
Response time	[s]	< 0.01
Operating conditions		
Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-15...80
Protection		IP 65; IP 67
Tests / approvals		
EMC		DIN EN 61000-6-2
		DIN EN 61000-6-3
Shock resistance		DIN EN 60068-2-27
		20 g (11 ms)
Vibration resistance		DIN EN 60068-2-6
		5 g (10...2000 Hz)
MTTF	[years]	778
Mechanical data		
Weight	[g]	2221.05
Material		brass chemically nickel-plated; PP; stainless steel (1.4404 / 316L); aluminum anodized; PA
Materials (wetted parts)		stainless steel (1.4401 / 316); brass; brass chemically nickel-plated; PP; PPS; spacer: POM; O-ring: FKM
Process connection		threaded connection Rp 1 1/2 Internal thread
Switching cycles mechanical		10 million
Remarks		
Remarks		Recommendation Use 200 micron filtration
		All data refer to water (20 °C).
Notes		Please note the changed housing design!
Pack quantity		1 pcs.

SBY457




Flow transmitters with fast response time


SBY32HF010KG/US

Electrical connection

Connector: 1 x M12; coding: A



Connection

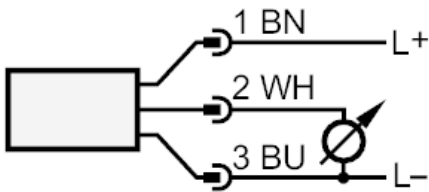


Colors to DIN EN 60947-5-2

Core colors :

BN = brown
BU = blue
WH = white

Diagrams and graphs

Pressure loss

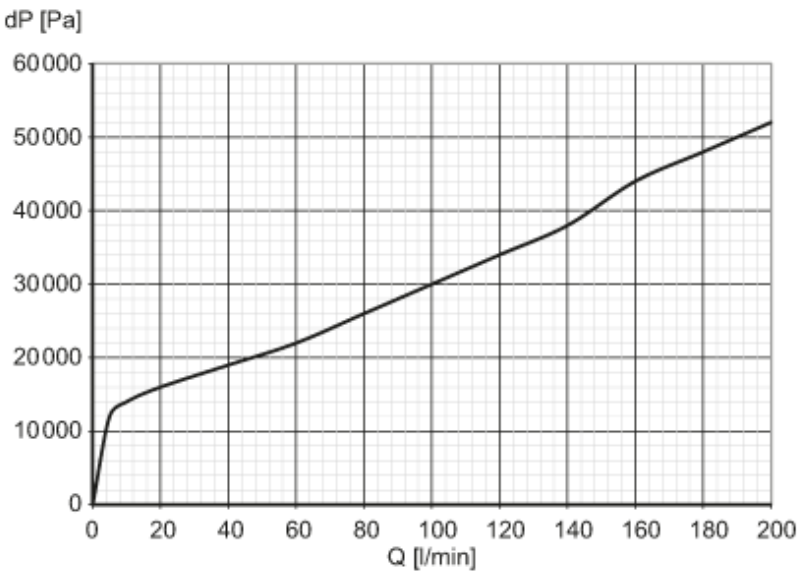

dP Pressure loss

Q volumetric flow quantity