

SD5100



Industrial gas counter


SDR14DGXFPKG/US-100

Article to be discontinued

Discontinuation date: 12/31/2024

Alternative articles: SD5600

When selecting an alternative article and accessories please note that technical data may differ!

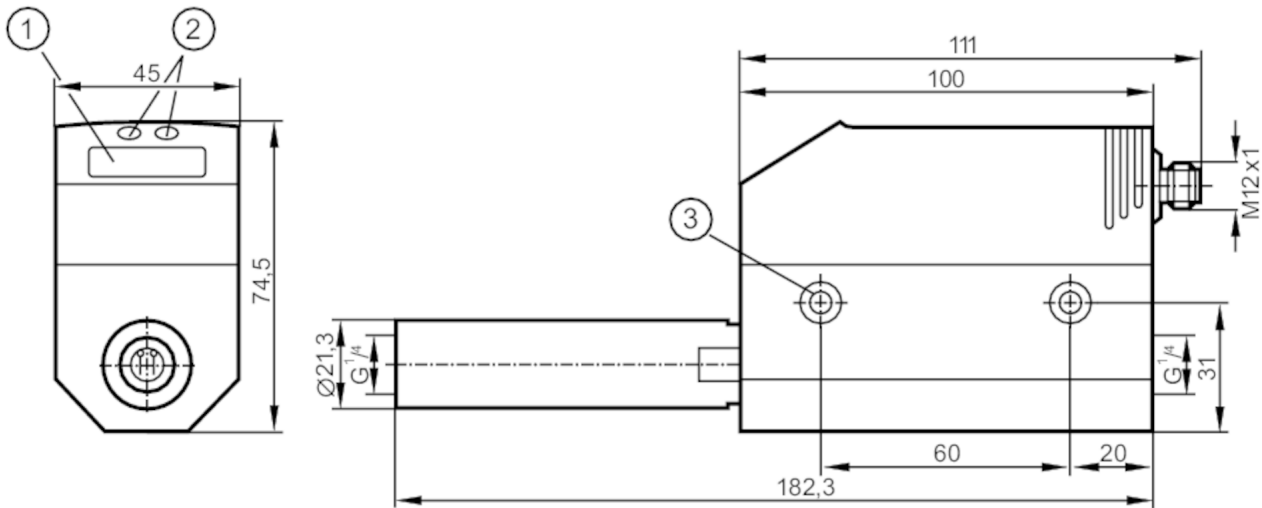

- 1 alphanumeric display 4-digit
- 2 Programming buttons
- 3 hole for fixing screw M5



Product characteristics

Number of inputs and outputs		Number of digital outputs: 2; Number of analog outputs: 1	
Process connection		threaded connection G 1/4 Internal thread DN8	
Ar			
Measuring range	[m³/h]	0.08...24.04	
CO2			
Measuring range	[m³/h]	0.04...14.36	
N2			
Measuring range	[m³/h]	0.04...15	

Application

Application	for industrial applications	
Media	Argon (Ar); carbon dioxide (CO2); nitrogen (N2)	
Medium temperature	[°C]	0...60
Pressure rating	16 bar	1.6 MPa

Electrical data

Operating voltage	[V]	18...30 DC; (to SELV/PELV)
Current consumption	[mA]	< 100
Protection class		III
Reverse polarity protection		yes

SD5100



Industrial gas counter

SDR14DGXFPKG/US-100

Power-on delay time	[s]	1
Inputs / outputs		
Number of inputs and outputs		Number of digital outputs: 2; Number of analog outputs: 1
Outputs		
Total number of outputs		2
Output signal		switching signal; analog signal; pulse signal; IO-Link; (configurable)
Electrical design		PNP
Number of digital outputs		2
Output function		normally open / closed; (configurable)
Max. voltage drop switching output DC	[V]	2
Permanent current rating of switching output DC	[mA]	250; (per output)
Number of analog outputs		1
Analog current output	[mA]	4...20; (scalable)
Max. load	[Ω]	500
Pulse output		consumed quantity meter
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Measuring/setting range		
Low flow cut-off LFC	[m³/h]	< 0.26
Measuring dynamics		1:300
Ar		
Measuring range	[m³/h]	0.08...24.04
Display range	[m³/h]	0...28.84
Resolution	[m³/h]	0.02
Set point SP	[m³/h]	0.22...24.04
Reset point rP	[m³/h]	0.12...23.94
Analog start point ASP	[m³/h]	0...19.24
Analog end point AEP	[m³/h]	4.8...24.04
In steps of	[m³/h]	0.02
CO2		
Measuring range	[m³/h]	0.04...14.36
Display range	[m³/h]	0...17.24
Resolution	[m³/h]	0.02
Set point SP	[m³/h]	0.14...14.36
Reset point rP	[m³/h]	0.08...14.3
Analog start point ASP	[m³/h]	0...11.48
Analog end point AEP	[m³/h]	2.88...14.36
In steps of	[m³/h]	0.02
Volumetric flow quantity monitoring		
Pulse value		0.001...1 000 000 m³

SD5100



Industrial gas counter

SDR14DGXFPKG/US-100

In steps of		0.001...1000 m³
Pulse length	[s]	0,062...2
N2		
Measuring range	[m³/h]	0.04...15
Display range	[m³/h]	0...18
Resolution	[m³/h]	0.02
Set point SP	[m³/h]	0.14...15
Reset point rP	[m³/h]	0.08...14.94
Analog start point ASP	[m³/h]	0...12
Analog end point AEP	[m³/h]	3...15
In steps of	[m³/h]	0.02
Temperature monitoring		
Measuring range	[°C]	0...60
Display range	[°C]	-12...72
Resolution	[°C]	0.2
Set point SP	[°C]	0.4...60
Reset point rP	[°C]	0...59.8
Analog start point	[°C]	0...48
Analog end point	[°C]	12...60
In steps of	[°C]	0.2
Accuracy / deviations		
Flow monitoring		
Repeatability	[% of the measured value]	± 1,5
Accuracy (in the measuring range)		
± (6 % MW + 0,6 % MEW); (conditions: installation to DIN ISO 2533)		
Temperature monitoring		
Accuracy	[K]	± 2; (medium flow in the limit area of the flow measurement range)
Reaction times		
Flow monitoring		
Response time	[s]	0.1; (dAP = 0)
Damping process value dAP in steps	[s]	0 - 0,2 - 0,4 - 0,6 - 0,8 - 1
Software / programming		
Parameter setting options	Flow monitoring; quantity meter; Preset counter; hysteresis / window; normally open / closed; current/pulse output; display can be rotated and switched off; Display unit; medium selection	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis	

SD5100



Industrial gas counter

SDR14DGXFPKG/US-100

SIO mode	yes	
Required master port class	A	
Process data analog	3	
Process data binary	2	
Min. process cycle time [ms]	4.1	
Supported DeviceIDs	Type of operation	DeviceID
	default	263

Operating conditions		
Ambient temperature [°C]		0...60
Storage temperature [°C]		-20...85
Max. relative air humidity [%]		90
Protection		IP 65

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	model number	003TG
CPA approval	accuracy class	-
	maximum allowable error	± 7 % FS
	Q (min)	0,04 m³/h (N2)
		0,04 m³/h (CO2)
		0,08 m³/h (Ar)
	Q (t)	-
	Q (max)	15 m³/h (N2)
		14,36 m³/h (CO2)
		24,04 m³/h (Ar)
Vibration resistance	DIN IEC 68-2-6	5 g (55...2000 Hz)
MTTF [years]		227
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight [g]		981
Housing		rectangular
Dimensions [mm]		182.3 x 45 x 74.5
Material	PBT-GF20; PC; PC; stainless steel (1.4301 / 304); FKM	
Materials (wetted parts)	stainless steel (1.4301 / 304); ceramics glass passivated; PEEK; polyester; FKM; aluminum anodized	
Process connection	threaded connection G 1/4 Internal thread DN8	

Displays / operating elements		
Display	Display unit	4 x LED, green (NI/min, Nm³/h, Nm³, °C)
	Function display	1 x LED, yellow
	Switching status	2 x LED, yellow
	Measured values	alphanumeric display, 4-digit
	Programming	alphanumeric display, 4-digit
Display unit	NI/min; Nm³/h; Nm³; °C	

SD5100



Industrial gas counter

SDR14DGXFPKG/US-100



Remarks	
Remarks	MW = Measured value
	MEW = Final value of the measuring range
	Measuring, display and setting ranges refer to standard volume flow according to DIN ISO 2533.
	For information about installation and operation please see the operating instructions.
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A



Connection

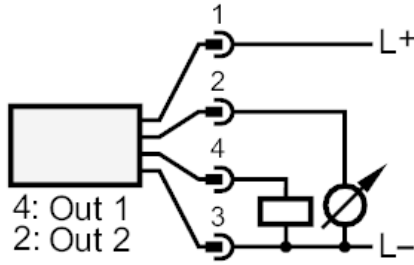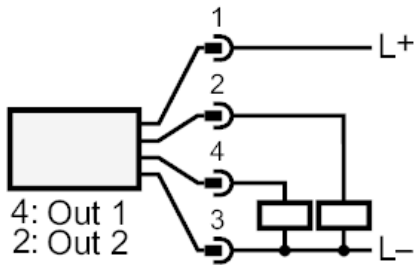

OUT1:	Switching output Pulse output quantity meter signal output Preset counter
OUT2:	Switching output analog output