

SD6100



Industrial gas counter


SDR12DGXFPKG/US-100

Article to be discontinued

Discontinuation date: 12/31/2024

Alternative articles: SD6600

When selecting an alternative article and accessories please note that technical data may differ!

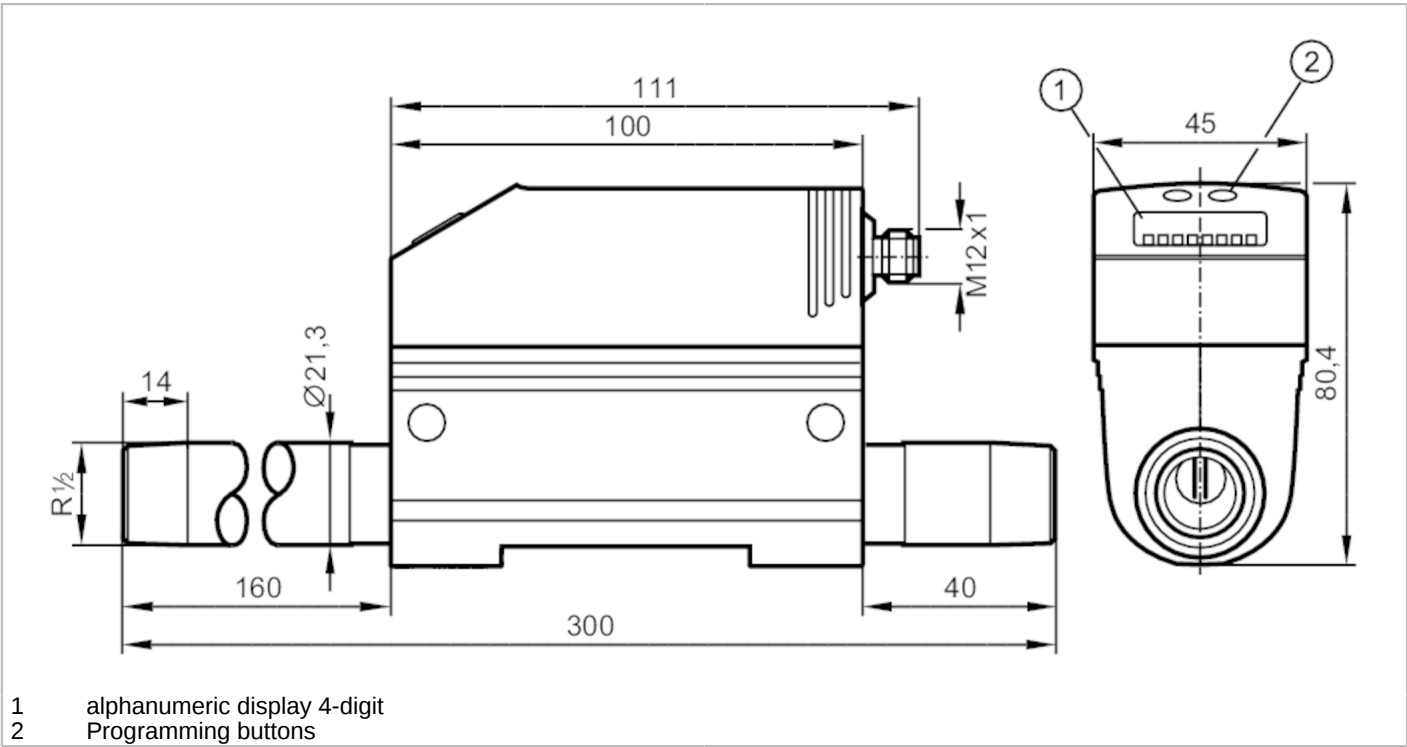

Product characteristics			
Number of inputs and outputs		Number of digital outputs: 2; Number of analog outputs: 1	
Process connection		threaded connection R 1/2 external thread DN15	
Ar			
Measuring range	[m³/h]	0.4...122	
CO2			
Measuring range	[m³/h]	0.2...74.7	
N2			
Measuring range	[m³/h]	0.2...75	
Application			
Application		for industrial applications	
Media		Argon (Ar); carbon dioxide (CO2); nitrogen (N2)	
Medium temperature	[°C]	0...60	
Pressure rating		16 bar	1.6 MPa
Electrical data			
Operating voltage	[V]	18...30 DC; (to SELV/PELV)	
Current consumption	[mA]	< 100	
Protection class		III	

SD6100



Industrial gas counter

SDR12DGXFPKG/US-100

Reverse polarity protection	yes
Power-on delay time [s]	1
Inputs / outputs	
Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1
Outputs	
Total number of outputs	2
Output signal	switching signal; analog signal; pulse signal; IO-Link; (configurable)
Electrical design	PNP
Number of digital outputs	2
Output function	normally open / closed; (configurable)
Max. voltage drop switching output DC [V]	2
Permanent current rating of switching output DC [mA]	250; (per output)
Number of analog outputs	1
Analog current output [mA]	4...20; (scalable)
Max. load [Ω]	500
Pulse output	consumed quantity meter
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes
Measuring/setting range	
Low flow cut-off LFC [m³/h]	< 1.3
Measuring dynamics	1:300
Ar	
Measuring range [m³/h]	0.4...122
Display range [m³/h]	0...146.4
Resolution [m³/h]	0.1
Set point SP [m³/h]	1.1...122
Reset point rP [m³/h]	0.6...121.5
Analog start point ASP [m³/h]	0...97.6
Analog end point AEP [m³/h]	24.4...122
In steps of [m³/h]	0.1
CO2	
Measuring range [m³/h]	0.2...74.7
Display range [m³/h]	0...89.7
Resolution [m³/h]	0.1
Set point SP [m³/h]	0.7...74.7
Reset point rP [m³/h]	0.4...74.4
Analog start point ASP [m³/h]	0...59.8
Analog end point AEP [m³/h]	14.9...74.7
In steps of [m³/h]	0.1



Industrial gas counter

SDR12DGXFPKG/US-100

Volumetric flow quantity monitoring		
Pulse value		0.001...1 000 000 m³
In steps of		0.001...1000 m³
Pulse length	[s]	0,012...2
N2		
Measuring range	[m³/h]	0.2...75
Display range	[m³/h]	0...90
Resolution	[m³/h]	0.1
Set point SP	[m³/h]	0.7...75
Reset point rP	[m³/h]	0.4...74.7
Analog start point ASP	[m³/h]	0...60
Analog end point AEP	[m³/h]	15...75
In steps of	[m³/h]	0.1
Temperature monitoring		
Measuring range	[°C]	0...60
Display range	[°C]	-12...72
Resolution	[°C]	0.2
Set point SP	[°C]	0.4...60
Reset point rP	[°C]	0...59.8
Analog start point	[°C]	0...48
Analog end point	[°C]	12...60
In steps of	[°C]	0.2
Accuracy / deviations		
Flow monitoring		
Repeatability	[% of the measured value]	± 1,5
Accuracy (in the measuring range)		
± (6 % MW + 0,6 % MEW); (conditions: installation to DIN ISO 2533; installation in pipes: DN15)		
Temperature monitoring		
Accuracy	[K]	± 2; (medium flow in the limit area of the flow measurement range)
Reaction times		
Flow monitoring		
Response time	[s]	0.1; (dAP = 0)
Damping process value dAP in steps	[s]	0 - 0,2 - 0,4 - 0,6 - 0,8 - 1
Software / programming		
Parameter setting options	Flow monitoring; quantity meter; Preset counter; hysteresis / window; normally open / closed; current/pulse output; display can be rotated and switched off; Display unit; medium selection	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	

SD6100



Industrial gas counter

SDR12DGXFPKG/US-100

SDCI standard	IEC 61131-9	
Profiles	Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis	
SIO mode	yes	
Required master port class	A	
Process data analog	3	
Process data binary	2	
Min. process cycle time [ms]	4.1	
Supported DeviceIDs	Type of operation	DeviceID
	default	265

Operating conditions		
Ambient temperature [°C]		0...60
Storage temperature [°C]		-20...85
Max. relative air humidity [%]		90
Protection		IP 65

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
CPA approval	model number	003TG
	accuracy class	-
	maximum allowable error	± 7 % FS
	Q (min)	0,2 m³/h (N2)
		0,2 m³/h (CO2)
		0,4 m³/h (Ar)
	Q (t)	-
	Q (max)	75 m³/h (N2)
		74,7 m³/h (CO2)
Vibration resistance	DIN IEC 68-2-6	5 g (55...2000 Hz)
MTTF [years]	227	
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight [g]	963.5	
Dimensions [mm]	300 x 45 x 80.4	
Material	PBT-GF20; PC; PC; stainless steel (1.4301 / 304); FKM	
Materials (wetted parts)	stainless steel (1.4301 / 304); ceramics glass passivated; PEEK; polyester; FKM; aluminum anodized	
Tightening torque [Nm]	50	
Process connection	threaded connection R 1/2 external thread DN15	

Displays / operating elements		
Display	Display unit	4 x LED, green (NI/min, Nm³/h, Nm³, °C)
	Function display	1 x LED, yellow
	Switching status	2 x LED, yellow
	Measured values	alphanumeric display, 4-digit
	Programming	alphanumeric display, 4-digit

SD6100



Industrial gas counter

SDR12DGXFPKG/US-100



Display unit	Nl/min; Nm³/h; Nm³; °C
Remarks	
Remarks	MW = Measured value
	MEW = Final value of the measuring range
	Measuring, display and setting ranges refer to standard volume flow according to DIN ISO 2533.
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A



Connection

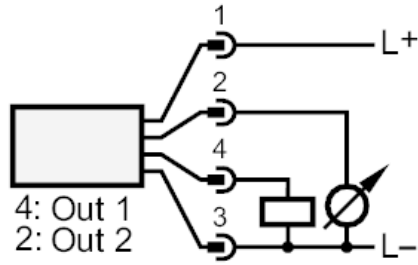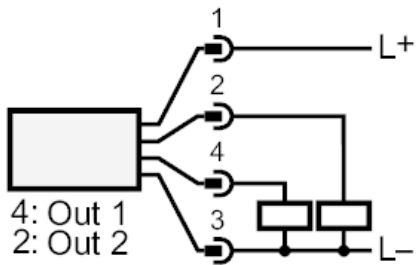

OUT1:	Switching output Pulse output quantity meter signal output Preset counter
OUT2:	Switching output analog output