


NI20-CP40-FZ3X2-B1131

Inductive Sensor

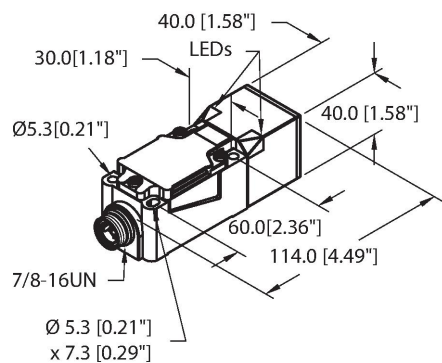


Technical data

Type	NI20-CP40-FZ3X2-B1131
ID	1341192
General data	
Rated switching distance	20 mm
Mounting conditions	Non-flush
Secured operating distance	$\leq (0.81 \times S_n)$ mm
Correction factors	St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4
Repeat accuracy	$\leq 2 \%$ of full scale
Hysteresis	3...15 %
Electrical data	
Operating voltage U_B	20...250 VAC
Operating voltage U_B	10...300 VDC
AC rated operational current	≤ 400 mA
DC rated operating current I_o	≤ 300 mA
Frequency	$\geq 50 \dots \leq 60$ Hz
Residual current	≤ 1.7 mA
Isolation test voltage	1.5 kV
Surge current	≤ 8 A (≤ 10 ms max. 5 Hz)
Voltage drop at I_o	≤ 6 V
Output function	2-wire, Connection programmable, 2-wire
Smallest operating current	≥ 3 mA
Switching frequency	0.02 kHz
Mechanical data	
Design	Rectangular, CP40
Dimensions	114 x 40 x 40 mm
Housing material	Plastic, PBT-GF30-V0, Black

Features


- Rectangular, height 40 mm
- Variable orientation of active face in 9 directions
- Plastic, PBT-GF30-V0
- High-luminance corner LEDs
- Optimum view of operating voltage and switching state from any position
- AC 2-wire, 20...250 VAC
- DC 2-wire, 10...300 VDC
- NO contact
- 7/8" connector

Wiring diagram



Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.



Technical data

Active area material	Plastic, PBT-GF30-V0, yellow
Connector housing	metal
Electrical connection	Connector, 7/8"
Environmental conditions	
Ambient temperature	-25...+70 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	2 × LEDs, Green
Switching state	2 × LEDs, Red

Mounting instructions

Mounting instructions/Description

The image contains two technical diagrams illustrating the mounting of a yellow connector housing into a grey metal bracket.

Top Diagram: Shows the housing being inserted into a slot. Dimensions are labeled as follows:

- N:** The height of the housing.
- D:** The distance between the center of the housing and the back of the bracket.
- S:** The distance between the center of the housing and the front of the bracket.
- W:** The total width of the bracket.

Bottom Diagram: Shows the housing being secured with a clamp. Dimensions are labeled as follows:

- G:** The distance from the front of the bracket to the center of the housing.
- B:** The width of the housing.

Distance D	3 × B
Distance W	3 x Sn
Distance S	1.5 x B
Distance G	6 x Sn
Distance N	0.5 × B
Width active area B	40 mm

Accessories

JS025/037	69429	BSS-CP40	6901318
Adjusting bar for rectangular housings CK/CP40; material: VA 1.4301		Mounting clamp for rectangular housings 40 x 40 mm; material: Polypropylene	
