


NI3-EG08K-AN6X-V1131

Inductive Sensor

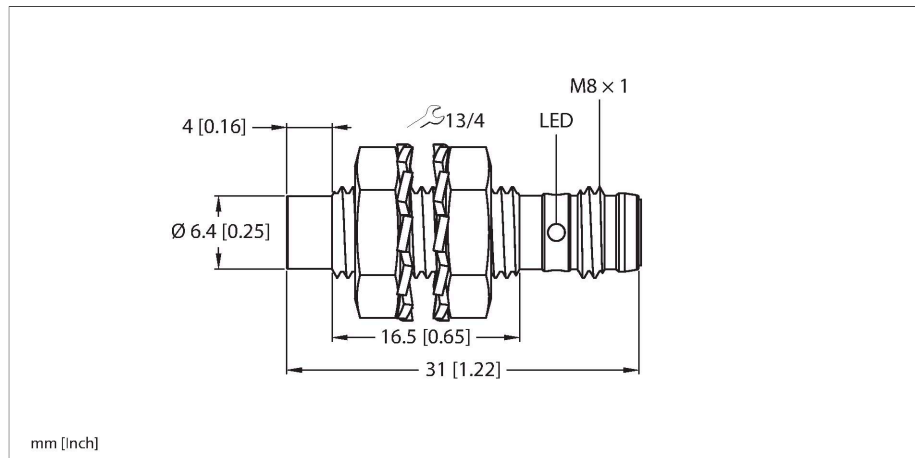


Technical data

Type	NI3-EG08K-AN6X-V1131
ID	4669750
General data	
Rated switching distance	3 mm
Mounting conditions	Non-flush
Secured operating distance	$\leq (0.81 \times S_n)$ mm
Correction factors	St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4
Repeat accuracy	≤ 2 % of full scale
Temperature drift	$\leq \pm 10$ %
Hysteresis	20 %
Electrical data	
Operating voltage U_B	10...30 VDC
Ripple U_{ss}	≤ 10 % U_{Bmax}
DC rated operating current I_o	≤ 150 mA
No-load current	≤ 15 mA
Residual current	≤ 0.1 mA
Isolation test voltage	0.5 kV
Short-circuit protection	yes/Cyclic
Voltage drop at I_o	≤ 1.8 V
Wire break/reverse polarity protection	yes/Complete
Output function	3-wire, NO contact, NPN
Switching frequency	3 kHz
Mechanical data	
Design	Threaded barrel, M8 x 1
Dimensions	31 mm
Housing material	Stainless steel, 1.4305 (AISI 303)

Features

- M8 x 1 threaded barrel
- Stainless steel, 1.4305 (AISI 303)
- DC 3-wire, 10...30 VDC
- NO contact, NPN output
- M8 x 1 male connector

Wiring diagram

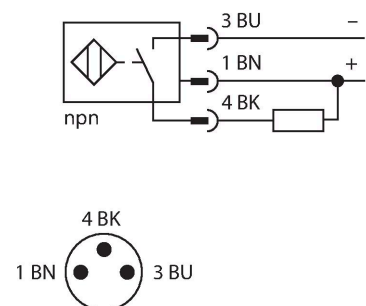

Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.

Technical data

Active area material	Plastic, PBT
Max. tightening torque of housing nut	5 Nm
Electrical connection	Connector, M8 × 1
Environmental conditions	
Ambient temperature	-25...+70 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED, Yellow

Mounting instructions



Mounting instructions/Description

The image contains three isometric diagrams illustrating different mounting configurations for a sensor. The sensor is represented as a grey rectangular block with a yellow cylindrical active area on its front face.

- Top Diagram:** Shows a single sensor mounted on a vertical plate. A dimension line labeled 'T' indicates the distance from the bottom edge of the plate to the center of the sensor's active area.
- Middle Diagram:** Shows two sensors mounted on a vertical plate. A dimension line labeled 'G' indicates the distance between the centers of the two sensors' active areas.
- Bottom Diagram:** Shows a sensor mounted on a horizontal plate. Several dimensions are indicated:
 - 'N' is the distance from the top edge of the plate to the top of the sensor.
 - 'S' is the distance from the bottom edge of the plate to the bottom of the sensor.
 - 'D' is the distance from the front edge of the plate to the center of the sensor's active area.
 - 'W' is the distance from the side edge of the plate to the center of the sensor's active area.


Distance D	3 x B
Distance W	3 x Sn
Distance T	3 x B
Distance S	1.5 x B
Distance G	6 x Sn
Distance N	2 x Sn
Diameter active area B	Ø 8 mm

Accessories

BST-08B	6947210	QM-08	6945100
			
Mounting clamp for threaded barrel sensors, with dead-stop; material: PA6		Quick-mount bracket with dead-stop, chrome-plated brass, male thread M12 x 1. Note: The switching distance of proximity switches may be reduced through the use of quick-mount brackets.	


MW086945008

Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)




BSS-086901322

Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene



MBS8069479

Mounting clamp for smooth barrel sensors; mounting block material: Anodized aluminum



Accessories

Dimension drawing	Type	ID	
	PKGV3M-2/TEL	6625385	Connection cable, M8 female connector, straight, 3-pin, stainless steel coupling nut, cable length: 2 m, jacket material: PVC, black; cULus approval

