


MK502A



T-slot cylinder sensor

MKT2020-NI--/A/6,0M/-H/1G/1D

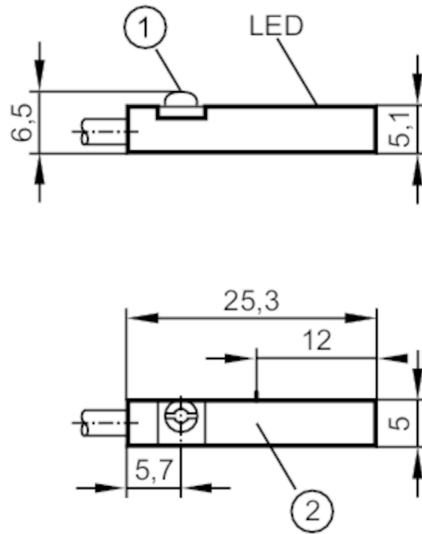

- 1 Fastening clamp
2 sensing face



Product characteristics

Electrical design	NAMUR
Output function	normally open
Dimensions [mm]	25.3 x 5 x 6.5

Electrical data

Connection at circuit amplifier	yes
Switching amplifiers	connection to certified intrinsically safe circuits with the max. values: $U = 15\text{ V}$ / $I = 50\text{ mA}$ / $P = 120\text{ mW}$
Nominal voltage DC [V]	8.2
Current consumption [mA]	Target not detected: ≤ 1 ; Target detected: $\geq 2,2$
Protection class	III
Reverse polarity protection	yes

Outputs

Electrical design	NAMUR
Output function	normally open
Switching frequency DC [Hz]	2000
Short-circuit protection	yes
Overload protection	yes

Monitoring range

Magnetic sensitivity [mT]	2
Travel speed [m/s]	> 10

Accuracy / deviations

Hysteresis [mm]	1
Repeatability [mm]	< 0.2

MK502A



T-slot cylinder sensor

MKT2020-NI--/A/6,0M/-H/1G/1D

Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 65; IP 67
Tests / approvals		
Approval		BVS 09 ATEX E164; IECEx BVS 09.0065
ATEX marking		 II 1G Ex ia IIC T4 Ga
		 II 1D Ex ia IIIC T135°C Da
EMC	EN 61000-4-2 ESD	- kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011 emission	class B
MTTF	[years]	2142
Safety classification		
Max. internal capacitance	[nF]	140
Max. internal inductance	[μH]	400
Mechanical data		
Weight	[g]	93.9
Mounting		flush mountable
Type of mounting		fastening clamp with combined slot / hexagon socket, width across flats 1.5
Cylinder type		T-slot cylinders
Dimensions	[mm]	25.3 x 5 x 6.5
Material		housing: PA; Fastening clamp: stainless steel
Displays / operating elements		
Display	Switching status	1 x LED, yellow
Accessories		
Items supplied		rubber memory stop: 1
		cable clip: 1
Remarks		
Pack quantity		1 pcs.

MK502A



T-slot cylinder sensor

MKT2020-NI--/A/6,0M/-H/1G/1D

Electrical connection

Cable: 6 m, PVC; 2 x 0.14 mm²

Connection



BN = Core colors :
brown
BU = blue