




Optical data coupler DAD15-8P




- 8 bit parallel data transfer
- Very large angle of divergence
- Can be connected in series
- Connection with spring-loaded terminals
- Degree of protection IP67

Optical data coupler



Dimensions

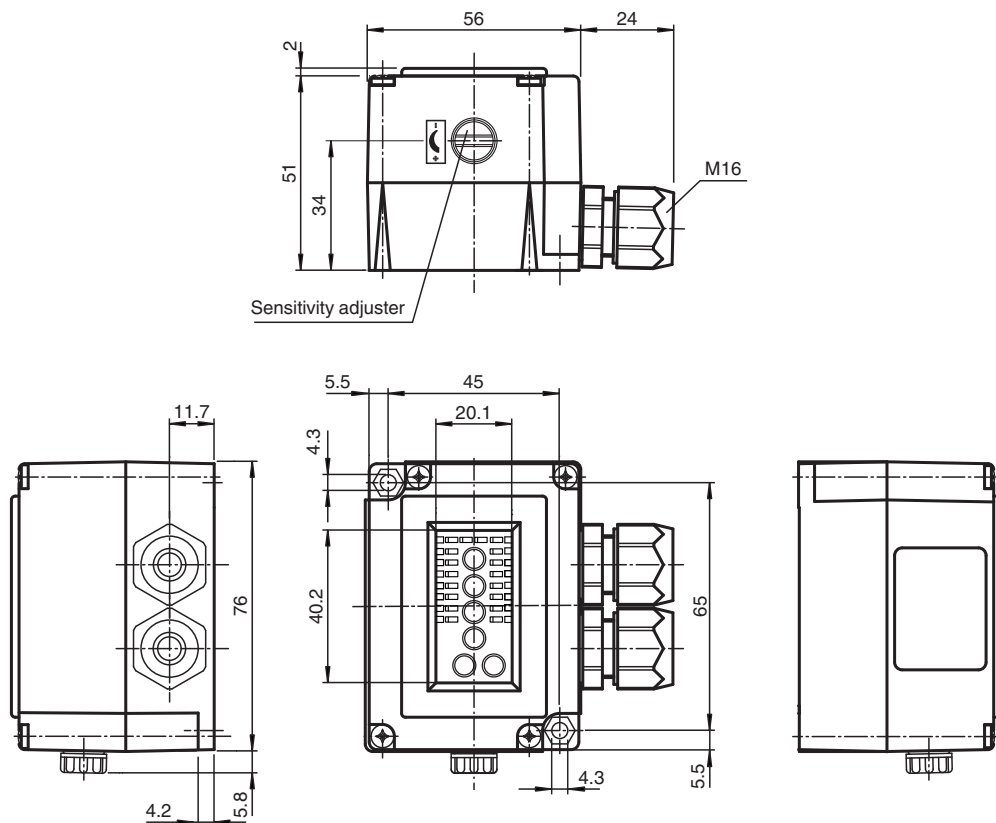

Technical Data

General specifications

Effective detection range	0 ... 1500 mm
Threshold detection range	2500 mm

Release date: 2021-11-25 Date of issue: 2021-11-25 Filename: 120838_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com


PEPPERL+FUCHS

Technical Data

Light source	IRED	
Light type		modulated infrared light
Diameter of the light spot		approx. 1000 mm at 1.5 m
Angle of divergence		± 20 °
Ambient light limit		5000 Lux
Cycle time		35 ms
Functional safety related parameters		
MTTF _d		200 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green
Data flow indicator		Inputs: 8 LEDs green Outputs: 8 LEDs red
Control elements		sensitivity adjustment
Control elements		Operating mode switch 4: Behavior when beam is broken Switches 1+2: Address
Electrical specifications		
Operating voltage	U _B	10 ... 60 V DC
No-load supply current	I ₀	40 mA
Data sampling blanking		Enable input emitter deactivation
Data rate		225 Bit/s
Interface		
Interface type		8 bit parallel, bidirectional 10 inputs, PNP , 10 outputs, PNP
Output		
Switching voltage		max. 60 V DC
Switching current		max. 200 mA per channel , short-circuit protected , total max. 800 mA
Conformity		
Product standard		EN 60947-5-2
Approvals and certificates		
EAC conformity		TR CU 020/2011
Approvals		CE
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Storage temperature		-20 ... 75 °C (-4 ... 167 °F)
Mechanical specifications		
Housing width		53 mm
Housing depth		56 mm
Degree of protection		IP67
Connection		2 M16 cable glands, tension spring terminals in the terminal compartment
Material		
Housing		Terluran®, black
Optical face		glass
Mass		170 g



Connection Assignment

Release date: 2021-11-25 Date of issue: 2021-11-25 Filename: 120838_eng.pdf

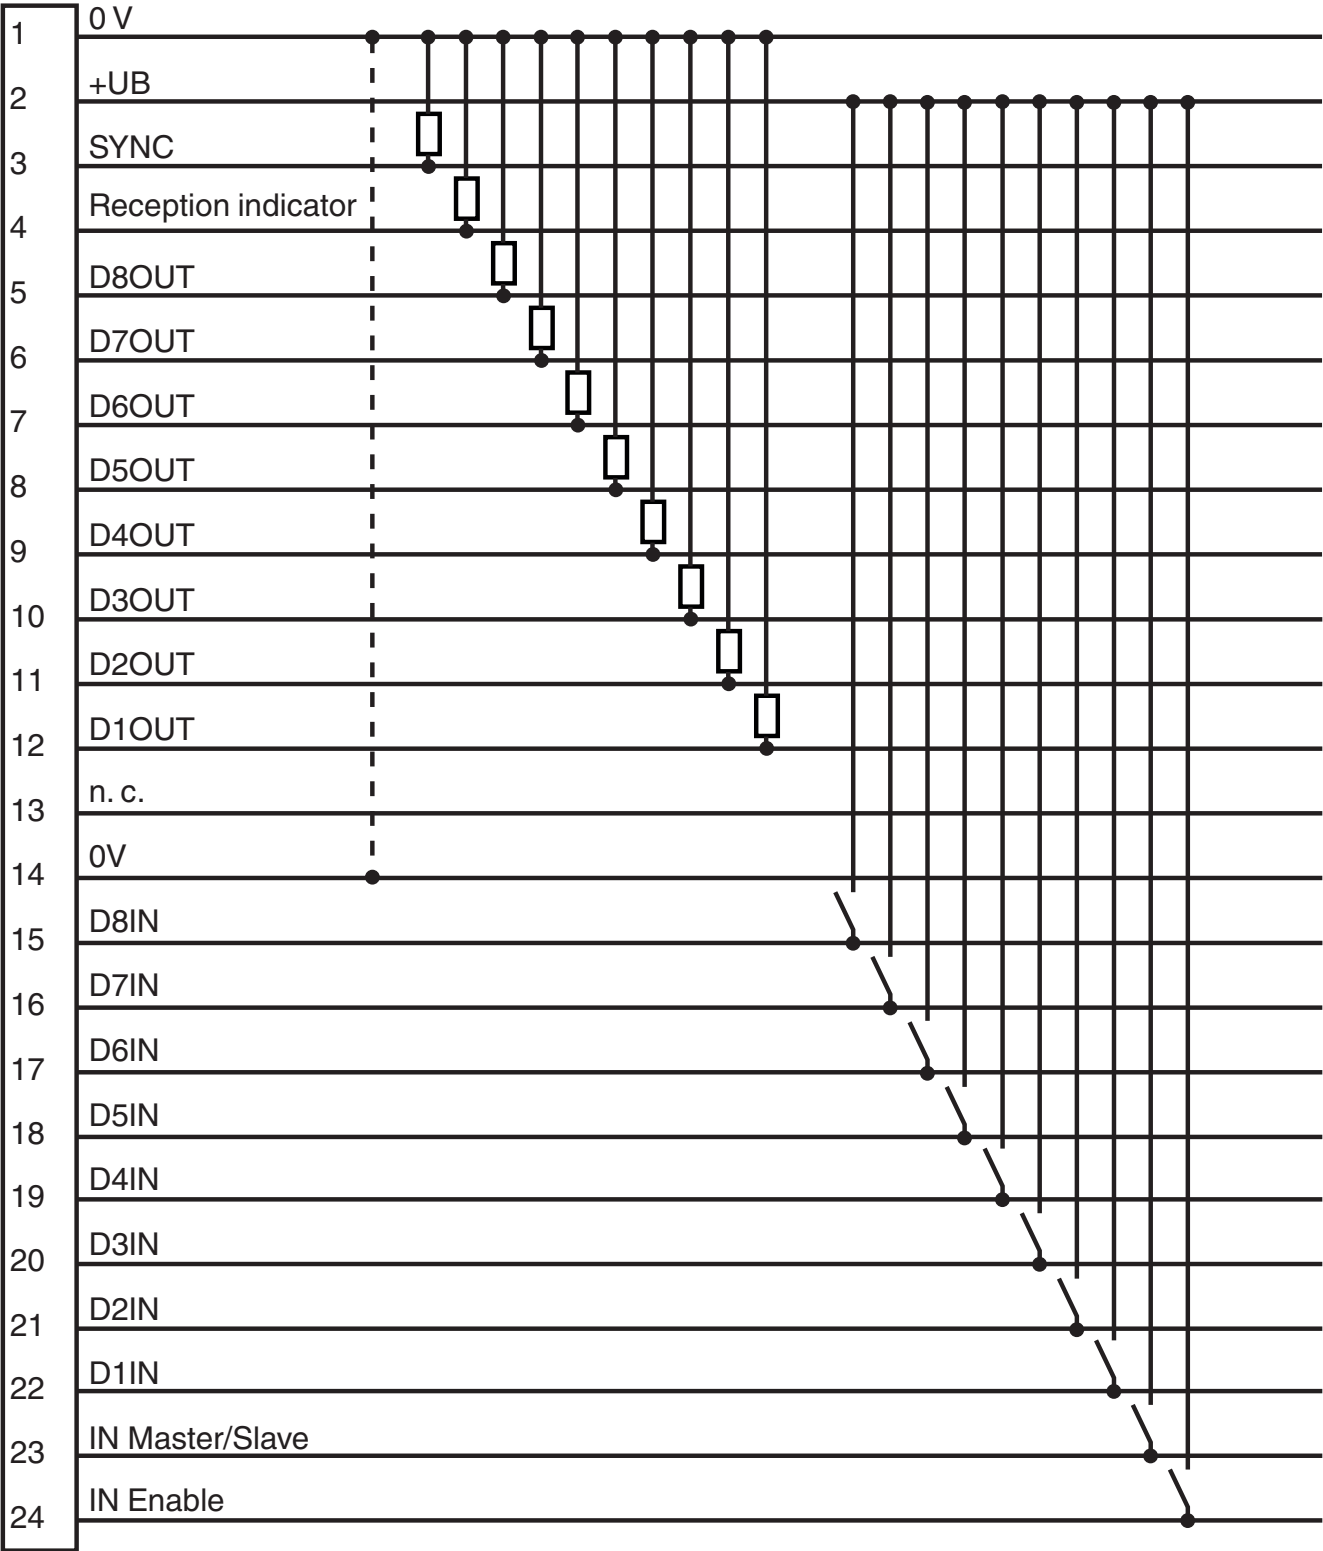

Release date: 2021-11-25 Date of issue: 2021-11-25 Filename: 120838_eng.pdf

Characteristic Curve

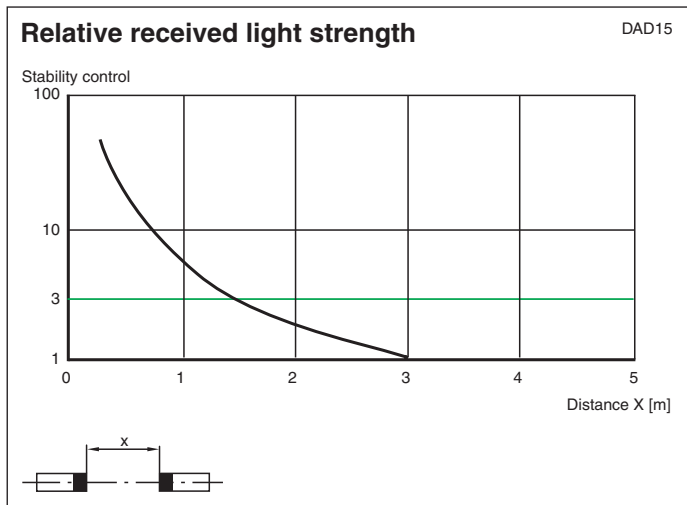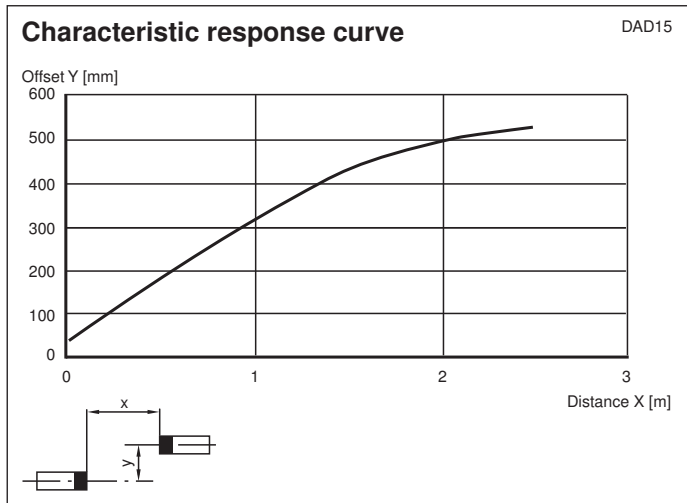

Accessories

	OMH-DAD10	Mounting bracket
---	------------------	------------------

Additional Information

Product description

The DAD 15-8P can be used to transfer data words eight bits wide bidirectionally.

A device pair is required to set up a transmission route. One device is operated as the MASTER (high level on the Master/Slave input) and the second one as the SLAVE (low level on the Master/Slave input).

All binary control signals present in parallel on inputs D1 - D8 are converted serially into an 8-bit sequence in the device, are transferred over the light route and are again applied in parallel in the receiver to outputs D1 - D8. Interference-resistant PPM modulation is used to transfer binary signals. The entire cycle during which the two current 8-bit words are transferred one after the other in both directions, in the time multiplex procedure, lasts 35 ms. This corresponds to a data rate of 350 Baud. This time multiplex procedure is of no significance to the user, since the last data to be received is stored and is available on the outputs until the next change is made.

Output behaviour when the beam of light is interrupted

The behaviour of the data outputs when the light beam is broken can be adjusted with the aid of the 4 switch (data latch):

OFF: Data outputs are turned off when the light beam is broken.

ON: The last data to be received remains intact on the outputs when the light beam is broken.

Input/output / emitter deactivation


A high level on the ENABLE input is required to operate the DAD15-8P. If there is a low level on the ENABLE input, the emitter will be turned off.

The ENABLE input has no function in SLAVE mode.

Inputs and outputs, reception indicator

The states of data inputs and outputs are displayed individually via LEDs. A high level on the input is indicated by a green LED. A red LED indicates an active output. Correct reception is indicated with the output and the RECEPTION INDICATOR LED.

The SYNC output indicates the end of a transmit or receive cycle. Output data are valid with a falling edge and new input data can be read.

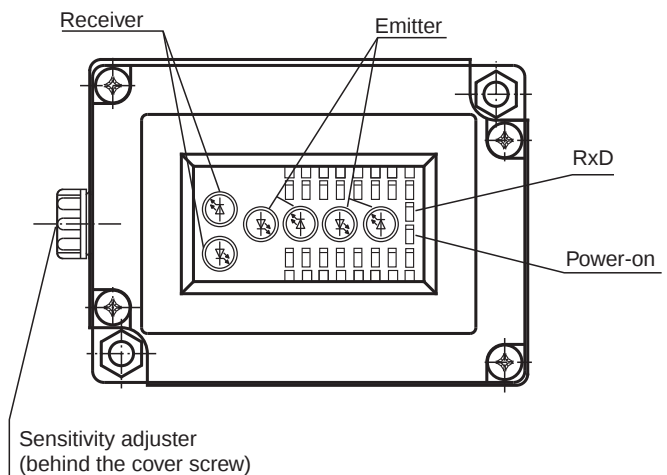

Chaining

The SYNC output can also be used to start an additional ENABLE input. Up to four MASTERS can be chained together in this manner. The devices must then be addressed by means of the A1 and A2 address switches. The SLAVE belonging to the MASTER in question requires the same address switch setting.

Arrangement and mounting

The DAD15 data light barrier consists of an electronics unit with spring-loaded terminals and 2 M16 cable glands. The electronics unit is connected with an internal connector. It is also fastened to it with 4 screws.

Accessories

OMH-DAD10 mounting angle

Timing

