



## Retroreflective sensor with polarization filter



### OBR15M-R200-2EP-IO

- Medium design with versatile mounting options
- Extended temperature range  
-40 °C ... 60 °C
- High degree of protection IP69K
- IO-Link interface for service and process data

## Retroreflective sensor with polarization filter



### Function


The optical sensors in the series are the first devices to offer an end-to-end solution in a medium-sized standard design – from the thru-beam sensor through to the measuring distance sensor. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The entire series enables sensors to communicate via IO-Link.

The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

Multi Pixel Technology (MPT) ensures that the standard sensors are flexible and can be adapted to the application environment.

### Dimensions

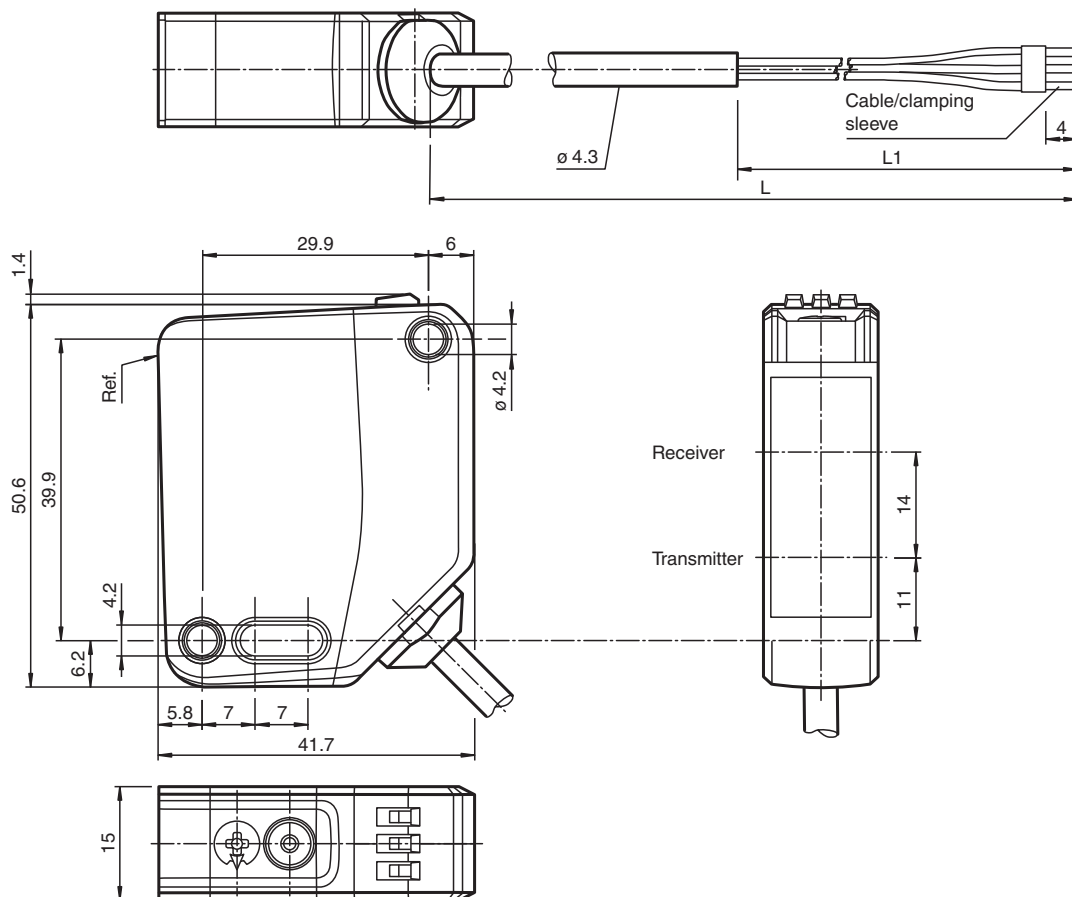

## Technical Data

### General specifications

|                            |                                      |
|----------------------------|--------------------------------------|
| Effective detection range  | 0 ... 15 m                           |
| Reflector distance         | 0.02 ... 15 m                        |
| Threshold detection range  | 18.5 m                               |
| Reference target           | H85-2 reflector                      |
| Light source               | LED                                  |
| Light type                 | modulated visible red light          |
| LED risk group labelling   | exempt group                         |
| Polarization filter        | yes                                  |
| Diameter of the light spot | approx. 520 mm at a distance of 15 m |
| Opening angle              | 2 °                                  |
| Ambient light limit        | EN 60947-5-2 : 60000 Lux             |

### Functional safety related parameters

|                                |       |
|--------------------------------|-------|
| MTTF <sub>d</sub>              | 724 a |
| Mission Time (T <sub>M</sub> ) | 20 a  |
| Diagnostic Coverage (DC)       | 0 %   |

### Indicators/operating means

|                     |                                                                                                                                            |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Operation indicator | LED green:<br>constantly on - power on<br>flashing (4Hz) - short circuit<br>flashing with short break (1 Hz) - IO-Link mode                |
| Function indicator  | Yellow LED:<br>Permanently lit - light path clear<br>Permanently off - object detected<br>Flashing (4 Hz) - insufficient operating reserve |
| Control elements    | Light-on/dark-on changeover switch                                                                                                         |
| Control elements    | sensitivity adjustment                                                                                                                     |

### Electrical specifications

|                        |                |                                   |
|------------------------|----------------|-----------------------------------|
| Operating voltage      | U <sub>B</sub> | 10 ... 30 V DC                    |
| Ripple                 |                | max. 10 %                         |
| No-load supply current | I <sub>0</sub> | < 18 mA at 24 V Operating voltage |
| Protection class       |                | III                               |

### Interface

|                             |                                                       |
|-----------------------------|-------------------------------------------------------|
| Interface type              | IO-Link ( via C/Q = BK )                              |
| IO-Link revision            | 1.1                                                   |
| Device profile              | Identification and diagnosis<br>Smart Sensor type 2.4 |
| Device ID                   | 0x111201 (1118721)                                    |
| Transfer rate               | COM2 (38.4 kBit/s)                                    |
| Min. cycle time             | 2.3 ms                                                |
| Process data width          | Process data input 2 Bit<br>Process data output 2 Bit |
| SIO mode support            | yes                                                   |
| Compatible master port type | A                                                     |

### Output

|                     |                                                                                                                                                                                                                                   |            |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Switching type      | The switching type of the sensor is adjustable. The default setting is:<br>C/Q - BK: NPN normally open / dark-on, PNP normally closed / light-on, IO-Link<br>/Q - WH: NPN normally closed / light-on, PNP normally open / dark-on |            |
| Signal output       | 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected                                                                                                                          |            |
| Switching voltage   | max. 30 V DC                                                                                                                                                                                                                      |            |
| Switching current   | max. 100 mA , resistive load                                                                                                                                                                                                      |            |
| Usage category      | DC-12 and DC-13                                                                                                                                                                                                                   |            |
| Voltage drop        | U <sub>d</sub>                                                                                                                                                                                                                    | ≤ 1.5 V DC |
| Switching frequency | f                                                                                                                                                                                                                                 | 1000 Hz    |
| Response time       |                                                                                                                                                                                                                                   | 0.5 ms     |


### Conformity

Release date: 2023-05-09 Date of issue: 2023-05-09 Filename: 295670-100011\_eng.pdf


Technical Data

|                                   |                                                                                                                                   |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Communication interface           | IEC 61131-9                                                                                                                       |
| Product standard                  | EN 60947-5-2                                                                                                                      |
| <b>Approvals and certificates</b> |                                                                                                                                   |
| UL approval                       | E87056 , cULus Listed , class 2 power supply , type rating 1                                                                      |
| CCC approval                      | CCC approval / marking not required for products rated ≤36 V                                                                      |
| <b>Ambient conditions</b>         |                                                                                                                                   |
| Ambient temperature               | -40 ... 60 °C (-40 ... 140 °F) , fixed cable<br>-20 ... 60 °C (-4 ... 140 °F) , movable cable not appropriate for conveyor chains |
| Storage temperature               | -40 ... 70 °C (-40 ... 158 °F)                                                                                                    |
| <b>Mechanical specifications</b>  |                                                                                                                                   |
| Housing width                     | 15 mm                                                                                                                             |
| Housing height                    | 50.6 mm                                                                                                                           |
| Housing depth                     | 41.7 mm                                                                                                                           |
| Degree of protection              | IP67 / IP69 / IP69K                                                                                                               |
| Connection                        | 2 m fixed cable                                                                                                                   |
| Material                          |                                                                                                                                   |
| Housing                           | PC (Polycarbonate)                                                                                                                |
| Optical face                      | PMMA                                                                                                                              |
| Mass                              | approx. 73 g                                                                                                                      |
| Cable length                      | 2 m                                                                                                                               |

Connection





Assembly

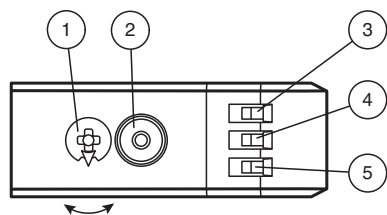

|   |                                      |    |
|---|--------------------------------------|----|
| 1 | Sensitivity adjustment               |    |
| 2 | Light-on / dark-on changeover switch |    |
| 3 | Operating indicator / dark on        | GN |
| 4 | Signal indicator                     | YE |
| 5 | Operating indicator / light on       | GN |

Release date: 2023-05-09 Date of issue: 2023-05-09 Filename: 295670-100011\_eng.pdf

## Characteristic Curve

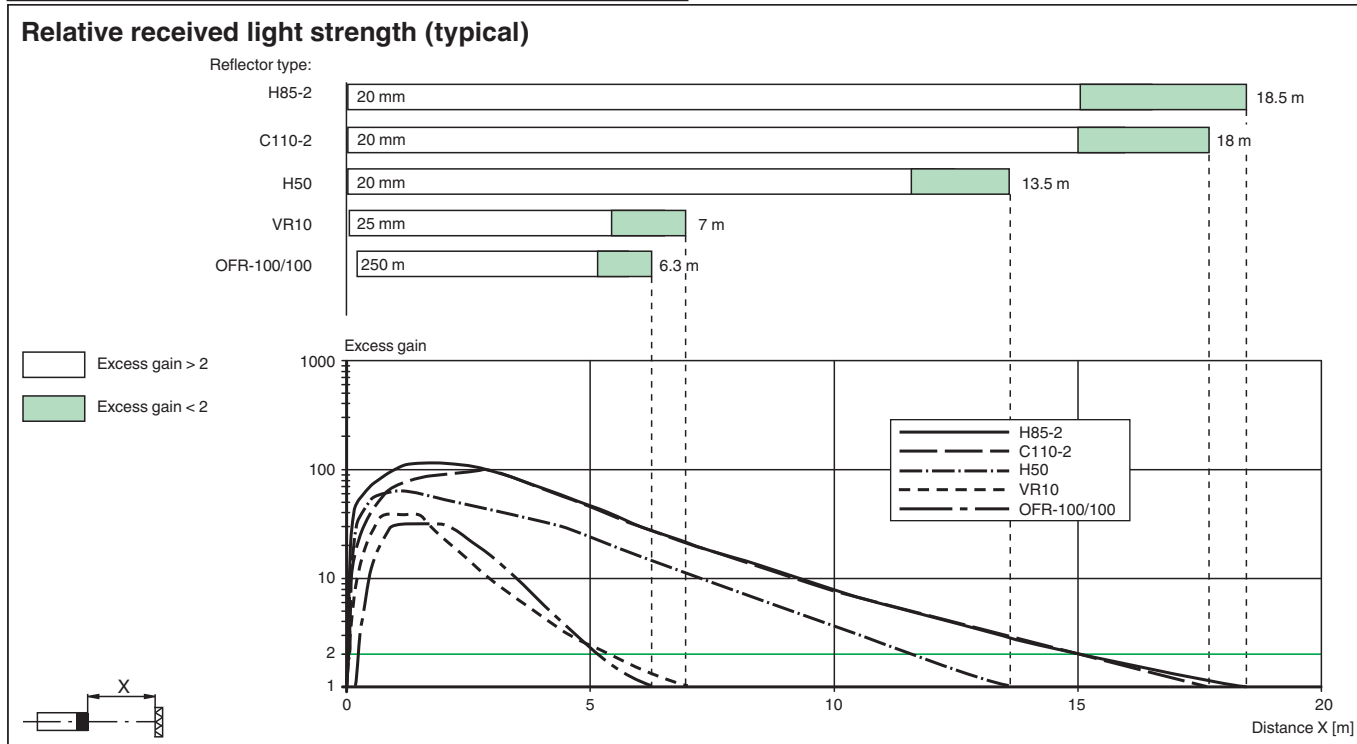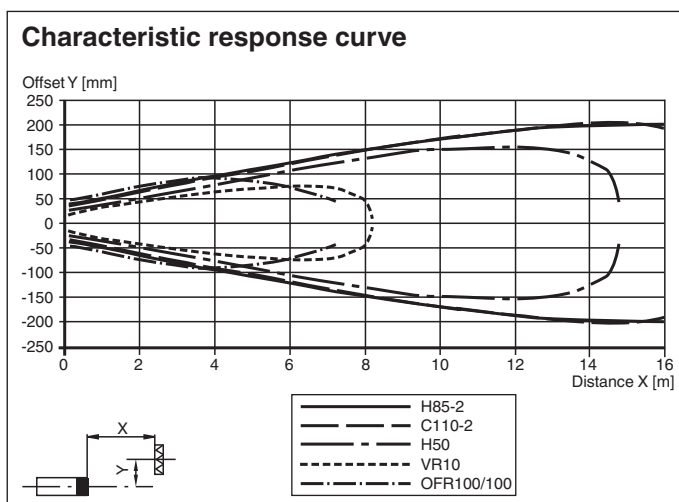

## Commissioning

To unlock the adjustment functions turn the sensing range / sensitivity adjuster for more than 180 degrees.

### Sensing Range / Sensitivity

Turn sensing range / sensitivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range / sensitivity adjuster counter clockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

### Light-on / Dark-on Configuration

Press the light-on / dark-on changeover switch for more than 1 second (less than 4 seconds). The light-on / dark-on mode changes and the operating indicators are activated accordingly.

If you press the light-on / dark-on changeover switch for more than 4 seconds, the light-on / dark-on mode changes back to the original setting. On release of the light-on / dark-on changeover switch the current state is activated.

### Restore Factory Settings

Press the light-on / dark-on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light-on / dark-on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory default settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range / sensitivity adjustment, turn the sensing range / sensitivity adjuster for more than 180 degrees.

## Accessories

|                                                                                     |                  |                                                          |
|-------------------------------------------------------------------------------------|------------------|----------------------------------------------------------|
|  | <b>REF-H85-2</b> | Reflector, rectangular 84.5 mm x 84.5 mm, mounting holes |
|-------------------------------------------------------------------------------------|------------------|----------------------------------------------------------|

## Accessories

|                                                                                     |                             |                                                                                                              |
|-------------------------------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------|
|    | <b>REF-C110-2</b>           | Reflector, round ø 84 mm, central mounting hole                                                              |
|    | <b>REF-H50</b>              | Reflector, rectangular 51 mm x 61 mm, mounting holes, fixing strap                                           |
|    | <b>REF-VR10</b>             | Reflector, rectangular 60 mm x 19 mm, mounting holes                                                         |
|    | <b>OFR-100/100</b>          | Reflective tape 100 mm x 100 mm                                                                              |
|    | <b>OMH-MLV12-HWG</b>        | Mounting bracket for series MLV12 sensors                                                                    |
|    | <b>OMH-R200-01</b>          | Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm                                                |
|    | <b>OMH-MLV12-HWK</b>        | Mounting bracket for series MLV12 sensors                                                                    |
|    | <b>OMH-R20x-Quick-Mount</b> | Quick mounting accessory                                                                                     |
|    | <b>ICE2-8IOL-G65L-V1D</b>   | EtherNet/IP IO-Link master with 8 inputs/outputs                                                             |
|  | <b>ICE3-8IOL-G65L-V1D</b>   | PROFINET IO IO-Link master with 8 inputs/outputs                                                             |
|  | <b>ICE2-8IOL-K45S-RJ45</b>  | EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, screw terminal                                   |
|  | <b>ICE3-8IOL-K45P-RJ45</b>  | PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, push-in terminals                                |
|  | <b>ICE3-8IOL-K45S-RJ45</b>  | PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, screw terminal                                   |
|  | <b>IO-Link-Master02-USB</b> | IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection |
|  | <b>ICE1-8IOL-G30L-V1D</b>   | Ethernet IO-Link module with 8 inputs/outputs                                                                |
|  | <b>ICE1-8IOL-G60L-V1D</b>   | Ethernet IO-Link module with 8 inputs/outputs                                                                |
|  | <b>ICE2-8IOL-K45P-RJ45</b>  | EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, push-in connectors                               |