


# IF7101



## Inductive sensor

IFK3004-BPKG/US-100

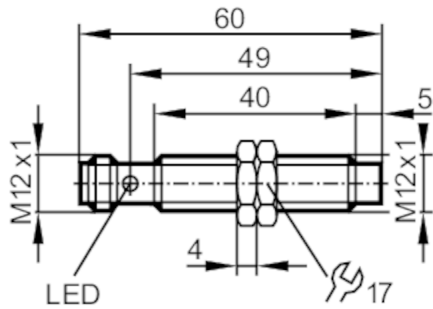

### Product characteristics

|                    |                  |
|--------------------|------------------|
| Electrical design  | PNP              |
| Output function    | normally open    |
| Sensing range [mm] | 4                |
| Housing            | Threaded type    |
| Dimensions [mm]    | M12 x 1 / L = 60 |

### Application

|        |                      |
|--------|----------------------|
| System | gold-plated contacts |
|--------|----------------------|

### Electrical data

|                             |            |
|-----------------------------|------------|
| Operating voltage [V]       | 10...30 DC |
| Current consumption [mA]    | < 10       |
| Protection class            | III        |
| Reverse polarity protection | yes        |

### Outputs

|                                                      |               |
|------------------------------------------------------|---------------|
| Electrical design                                    | PNP           |
| Output function                                      | normally open |
| Max. voltage drop switching output DC [V]            | 2.5           |
| Permanent current rating of switching output DC [mA] | 100           |
| Switching frequency DC [Hz]                          | 700           |
| Short-circuit protection                             | yes           |
| Overload protection                                  | yes           |

### Monitoring range

|                            |          |
|----------------------------|----------|
| Sensing range [mm]         | 4        |
| Real sensing range Sr [mm] | 4 ± 10 % |
| Operating distance [mm]    | 0...3.24 |

### Accuracy / deviations

|                              |                                                                            |
|------------------------------|----------------------------------------------------------------------------|
| Correction factor            | steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3 |
| Hysteresis [% of Sr]         | 3...15                                                                     |
| Switch-point drift [% of Sr] | -10...10                                                                   |

# IF7101



## Inductive sensor

IFK3004-BPKG/US-100

### Operating conditions

|                     |      |          |
|---------------------|------|----------|
| Ambient temperature | [°C] | -25...70 |
| Protection          |      | IP 67    |

### Tests / approvals

|                            |                           |                         |
|----------------------------|---------------------------|-------------------------|
| EMC                        | EN 61000-4-2 ESD          | 4 kV CD / 8 kV AD       |
|                            | EN 61000-4-3 HF radiated  | 10 V/m                  |
|                            | EN 61000-4-4 Burst        | 2 kV                    |
|                            | EN 61000-4-6 HF conducted | 3 V                     |
|                            | EN 55011                  | class B                 |
| MTTF                       | [years]                   | 1134                    |
| Embedded software included |                           | no                      |
| UL approval                | Ta                        | -25...70 °C             |
|                            | Enclosure type            | Type 1                  |
|                            | voltage supply            | Limited Voltage/Current |
|                            | UL approval number        | A001                    |
|                            | File number UL            | E174191                 |

### Mechanical data

|                    |      |                                                                                                                        |
|--------------------|------|------------------------------------------------------------------------------------------------------------------------|
| Weight             | [g]  | 27.2                                                                                                                   |
| Housing            |      | Threaded type                                                                                                          |
| Mounting           |      | non-flush mountable                                                                                                    |
| Dimensions         | [mm] | M12 x 1 / L = 60                                                                                                       |
| Thread designation |      | M12 x 1                                                                                                                |
| Material           |      | housing: brass white bronze coated; sensing face: PBT orange;<br>LED window: PEI; lock nuts: brass white bronze coated |

### Displays / operating elements

|         |                  |                 |
|---------|------------------|-----------------|
| Display | Switching status | 1 x LED, yellow |
|---------|------------------|-----------------|

### Accessories

|                |              |
|----------------|--------------|
| Items supplied | lock nuts: 2 |
|----------------|--------------|

### Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

### Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: gold-plated



# IF7101



## Inductive sensor

IFK3004-BPKG/US-100

### Connection

