


# QS18VP6AFF200

## Photoelectric Sensor – Diffuse Mode Sensor with Adjustable Foreground Suppression




### Technical data

|                              |                                    |
|------------------------------|------------------------------------|
| Type                         | QS18VP6AFF200                      |
| ID                           | 3011470                            |
| <b>Optical data</b>          |                                    |
| Function                     | Proximity switch                   |
| Operating mode               | Foreground suppression, adjustable |
| Light type                   | Red                                |
| Wavelength                   | 630 nm                             |
| Range                        | 30...200 mm                        |
| <b>Electrical data</b>       |                                    |
| Operating voltage            | 10...30 VDC                        |
| Residual ripple              | < 10 % U <sub>ss</sub>             |
| DC rated operational current | ≤ 100 mA                           |
| Short-circuit protection     | yes                                |
| Reverse polarity protection  | yes                                |
| Output function              | NO/NC, PNP                         |
| Current output               | 100 mA                             |
| Switching frequency          | ≤ 700 Hz                           |
| Readiness delay              | ≤ 200 ms                           |
| Response time typical        | < 2.5 ms                           |
| Setting option               | Mechanical Screw                   |
| <b>Mechanical data</b>       |                                    |
| Design                       | Rectangular, QS18                  |
| Dimensions                   | 21.1 x 15 x 34.5 mm                |
| Housing material             | Plastic, ABS                       |
| Lens                         | plastic, Acrylic                   |
| Electrical connection        | Cable, 2 m, PVC                    |

### Features

- Cable, PVC, 2 m
- Protection class IP67
- LED all-round visible
- Cut-off point adjusted via potentiometer
- Operating voltage: 10...30 VDC
- PNP switching output, changeover

### Wiring diagram




### Functional principle

Diffuse mode sensors with foreground and background suppression operate with a single emitter and two receiver elements, one for close range and one for far range. The target position and the photoelectric structure of the sensor determine which receiver element gets the most light. The optics in front of the receiver is modified with the adjusting screw until the boundary between close and far range is shifted. This operation determines whether the reflecting object is in or outside the measuring range.

Excess gain curves relating to the nearest and farthest cut-off point

Technical data

|                        |                                           |
|------------------------|-------------------------------------------|
| Number of cores        | 4                                         |
| Core cross-section     | 0.35 mm <sup>2</sup>                      |
| Ambient temperature    | -20...+55 °C                              |
| Protection class       | IP67                                      |
| Power-on indication    | LED, Green                                |
| Switching state        | LED, Yellow                               |
| Error indication       | LED, green, Flashing                      |
| Excess gain indication | LED, yellow, flashing                     |
| Tests/approvals        |                                           |
| MTTF                   | 268 years acc. to SN 29500 (Ed. 99) 40 °C |
| Approvals              | CE, cURus                                 |

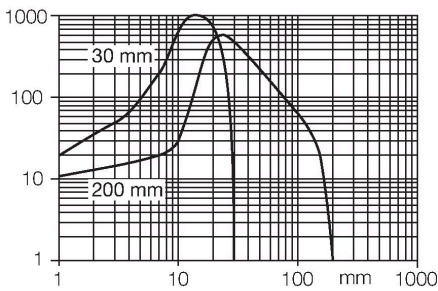

Accessories

