


SM2A312WQDP


Photoelectric Sensor – Diffuse Mode Sensor

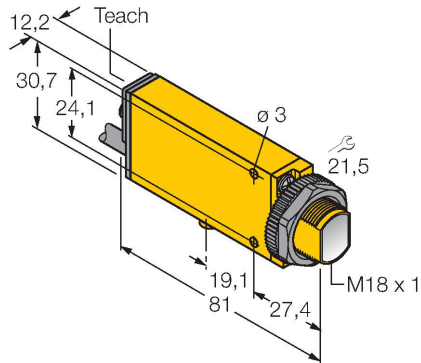

Features

- Cable, PVC, 2 m
- Protection class IP67
- Sensitivity adjustable via potentiometer
- Alignment indicator
- Operating voltage: 24...240 VAC
- Switching output, bipolar
- Light/dark operation

Wiring diagram




Technical data

Type	SM2A312WQDP
ID	3029559
Optical data	
Function	Proximity switch
Operating mode	Divergent
Light type	IR
Wavelength	880 nm
Range	0...130 mm
Electrical data	
Operating voltage	24...240 VAC
Output function	Relay output
Readiness delay	≤ 300 ms
Response time typical	< 8 ms
Setting option	Potentiometer
Mechanical data	
Design	Rectangular, Mini Beam
Housing material	Plastic, Thermoplastic material, Yellow
Lens	plastic, Acrylic
Electrical connection	Cable with connector, 1/2", 0.15 m, PVC
Number of cores	3
Ambient temperature	-20...+70 °C
Protection class	IP67
Special features	Encapsulated
Excess gain indication	LED
Tests/approvals	
Approvals	CE, cURus, CSA

Functional principle


Diffuse mode sensors incorporate the emitter and receiver in a single housing. However, diffuse mode sensors do not detect the interruption of the light beam like opposed mode sensors, but the reflection of the target. A target is detected if it reflects a sufficient amount of light back to the receiver. The switching distance of diffuse mode sensors thus largely depends on the reflectivity of the target.

Excess gain curve
Excess gain in relation to the distance

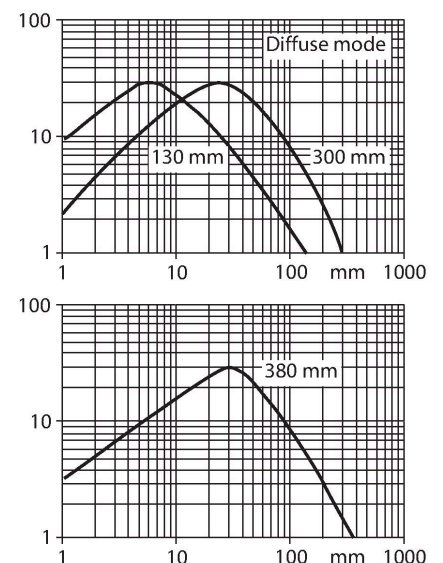


Accessories

SMB18A 3033200




Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

SMB18AFAM10 3012558




Mounting bracket, material VA 1.4401, for M10 x 1.5 thread, thread length 18 mm

SMB18SF 3052519




Mounting bracket, PBT black, for sensors with 18 mm thread, rotatable

SMB312B 3025519



Mounting bracket, stainless steel, for MINI-BEAM NAMUR

SMB3018SC 3053952



Mounting bracket, PTB black, for sensors with 18 mm thread