

II5913




Inductive analog sensor

IIK3015A1PKG/US

Article to be discontinued

Alternative articles: II6913
When selecting an alternative article and accessories please note that technical data may differ!

IO-Link enabled inductive sensors

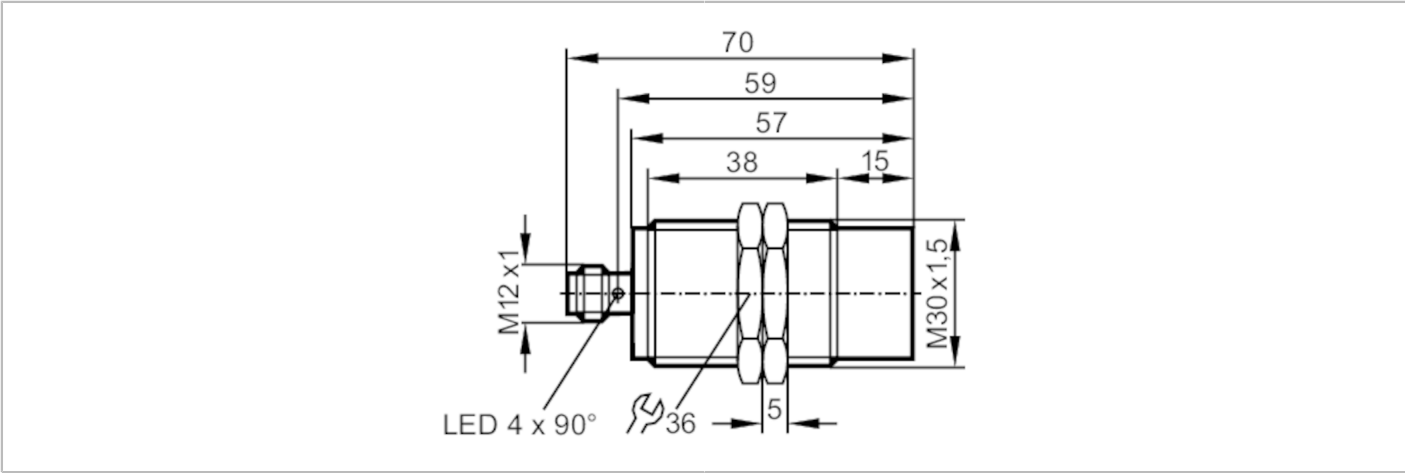

Product characteristics		
Housing		Threaded type
Dimensions	[mm]	M30 x 1.5 / L = 70
Electrical data		
Operating voltage	[V]	15...30 DC
Current consumption	[mA]	< 20
Protection class		II
Reverse polarity protection		yes
Outputs		
Analog current output	[mA]	4...20; (linear; gradient: 1,143 mA/mm; for frontal approach and for target made of mild steel: 45 x 45 x 1 mm)
Max. load	[Ω]	500
Short-circuit protection		yes
Overload protection		yes
Monitoring range		
Measuring range	[mm]	1...15
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3
Linearity error of analog output	[%]	± 1 %; (of IA max)
Repeatability analog output	[%]	± 1 %; (of IA max)
Reaction times		
Response time	[ms]	< 20

II5913




Inductive analog sensor

IIK3015A1PKG/US

Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
MTTF	[years]	964
Mechanical data		
Weight	[g]	125.42
Housing		Threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M30 x 1.5 / L = 70
Thread designation		M30 x 1.5
Material		housing: brass white bronze coated; sensing face: PBT
Tightening torque	[Nm]	50
Displays / operating elements		
Display	within the operating range	1 x LED, yellow lights
	outside the operating range	1 x LED, yellow flashing
Accessories		
Items supplied		lock nuts: 2
Remarks		
Pack quantity		1 pcs.

Electrical connection - plug

Connector: 1 x M12; coding: A



Connection

