




Inductive sensor

IIK3015-ANKG/2M/PUR

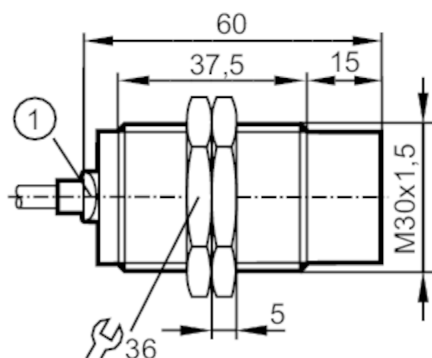

1 LED yellow



Product characteristics

Electrical design	NPN
Output function	normally open
Sensing range [mm]	15
Housing	Threaded type
Dimensions [mm]	M30 x 1.5 / L = 60

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 10
Protection class	III
Reverse polarity protection	yes

Outputs

Electrical design	NPN
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	200
Short-circuit protection	yes
Overload protection	yes

Monitoring range

Sensing range [mm]	15
Real sensing range S_r [mm]	$15 \pm 10 \%$
Operating distance [mm]	0...12.1

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3
Hysteresis [% of S_r]	3...15
Switch-point drift [% of S_r]	-10...10

Operating conditions

Ambient temperature [°C]	-25...75
--------------------------	----------

II7107



Inductive sensor

IIK3015-ANKG/2M/PUR

Protection		IP 67	
Tests / approvals			
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD	
	EN 61000-4-3 HF radiated	10 V/m	
	EN 61000-4-4 Burst	2 kV	
	EN 61000-4-6 HF conducted	10 V	
	EN 55011	class B	
MTTF	[years]	1675	
Embedded software included		yes	
UL approval	Ta	-25...75 °C	
	Enclosure type	Type 1	
	voltage supply	Limited Voltage/Current	
	UL approval number	A002	
	File number UL	E174191	
Mechanical data			
Weight	[g]	166	
Housing		Threaded type	
Mounting		non-flush mountable	
Dimensions	[mm]	M30 x 1.5 / L = 60	
Thread designation		M30 x 1.5	
Material		housing: brass white bronze coated; sensing face: PBT orange; LED window: PEI; lock nuts: brass white bronze coated	
Tightening torque	[Nm]	50	
Displays / operating elements			
Display		Switching status	1 x LED, yellow
Accessories			
Items supplied		lock nuts: 2	
Remarks			
Pack quantity		1 pcs.	

II7107



Inductive sensor

IIK3015-ANKG/2M/PUR

Electrical connection

Cable: 2 m, PUR, Ø 4.0 mm; 3 x 0.34 mm²

Connection



BK =	Core colors :
BN =	black
BU =	brown
	blue