




Inductive AS-Interface sensor

IIC2022-ASI /M/US-104

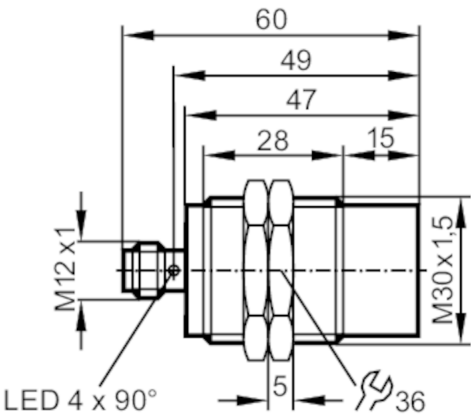

Product characteristics		
Electrical design		AS-i
Sensing range	[mm]	22
Housing		Threaded type
Dimensions	[mm]	M30 x 1.5 / L = 60
Application		
System		gold-plated contacts
Application		Oils and coolants
Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Current consumption	[mA]	< 30
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	1000
Outputs		
Electrical design		AS-i
Switching frequency DC	[Hz]	100
Monitoring range		
Sensing range	[mm]	22
Real sensing range Sr	[mm]	22 ± 10 %
Operating distance	[mm]	0...17.82
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.45 / copper: 0.35
Hysteresis	[% of Sr]	1...20
Switch-point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 68; ("Coolant")



Inductive AS-Interface sensor

IIC2022-ASI /M/US-104

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
MTTF	[years]	1390
UL approval	Ta	-25...70 °C
	Enclosure type	Type 1
	voltage supply	Limited Voltage/Current
	File number UL	E174191

AS-i classification						
AS-i version		2.1				
Extended addressing mode		yes				
AS-i I/O configuration		[hex]	0			
AS-i ID code		[hex]	A.F			
AS-i certificate		57501				
Data bits		Description	switching signal	not used	not used	not used
		status = 0	target outside the active zone	-	-	-
		status = 1	target within the active zone	default value	default value	default value

Mechanical data	
Weight	[g] 114
Housing	Threaded type
Mounting	non-flush mountable
Dimensions	[mm] M30 x 1.5 / L = 60
Thread designation	M30 x 1.5
Material	stainless steel (1.4404 / 316L); sensing face: LCP uncolored

Displays / operating elements		
Display	Switching status	4 x 90° LED, yellow
	Function	1 x LED, red

Accessories	
Items supplied	lock nuts: 2

Remarks	
Pack quantity	1 pcs.

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: gold-plated





Inductive AS-Interface sensor

IIC2022-ASI /M/US-104

Connection

