


N95001



Inductive NAMUR dual sensor for valve actuators

IND2004DN/T1/1D/2G

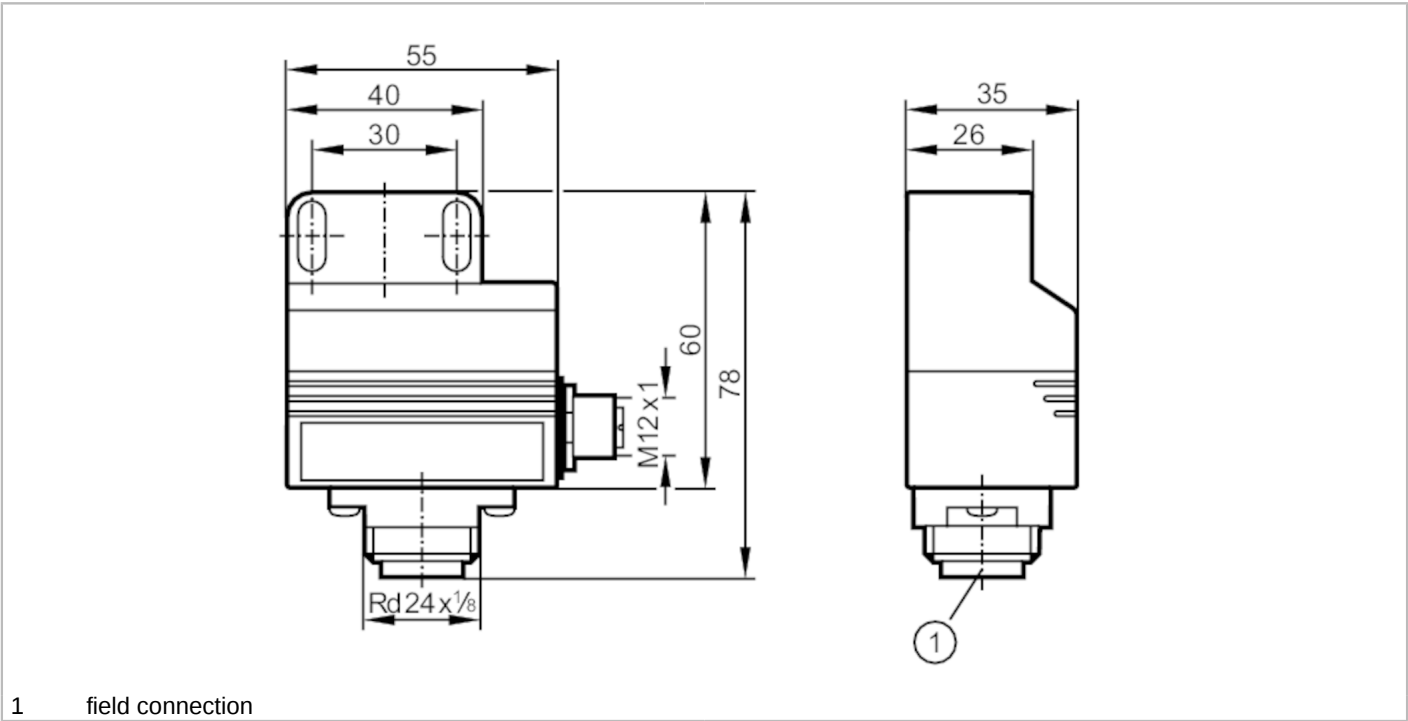

Product characteristics		
Electrical design		NAMUR
Output function		2 x normally closed
Sensing range	[mm]	4
Housing		rectangular
Dimensions	[mm]	40 x 26 x 60
Application		
Application		For mechanical interfaces to ISO 5211 (VDI/VDE)
Electrical data		
Connection at circuit amplifier		yes
Switching amplifiers		connection to certified intrinsically safe circuits with the max. values: U = 15 V / I = 50 mA / P = 120 mW
Nominal voltage DC	[V]	8.2; (1kΩ)
Current consumption	[mA]	< 1; (disabled; conductive: > 2,2)
Protection class		III
Outputs		
Electrical design		NAMUR
Output function		2 x normally closed
Switching frequency DC	[Hz]	250
Monitoring range		
Sensing range	[mm]	4
Real sensing range Sr	[mm]	4 ± 10 %
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3

N95001



Inductive NAMUR dual sensor for valve actuators

IND2004DN/T1/1D/2G

Hysteresis	[% of Sr]	1...15
Switch-point drift	[% of Sr]	-10...10

Operating conditions

Ambient temperature	[°C]	-20...70
Protection		IP 67

Tests / approvals

Approval	BVS 03 ATEX E 131 X; BVS 04 ATEX E 153 X; IECEx BVS 06.0003X	
ATEX marking		II 2G Ex ia IIC T6 Gb Ta -20...70°C
		II 2G Ex ia IIC T5 Gb Ta -20...80°C
		II 1D Ex ia IIIB T200 90°C Da Ta: -20...70°C
		II 1D Ex ia IIIB T200 100° C Da Ta: -20...80°C
EMC	EN 60947-5-6	
Shock/vibration resistance	30 g (11 ms) / 10-55 Hz (1 mm)	
MTTF	[years]	1232

Safety classification

Max. internal capacitance	[nF]	150; (per intrinsically safe electric circuit)
Max. internal inductance	[μH]	150; (per intrinsically safe electric circuit)

Mechanical data

Weight	[g]	175
Housing		rectangular
Mounting		non-flush mountable
Dimensions	[mm]	40 x 26 x 60
Material		housing: PBT; cover: PC

Displays / operating elements


Display	Switching status	2 x LED, yellow
---------	------------------	-----------------

Remarks

Remarks	solenoid valve circuit Ex-i: connection to certified intrinsically safe circuits with the max. values: U = 28 V DC / P = 2 W	
Pack quantity	1 pcs.	

Electrical connection - Socket

Connector: 1 x M12; coding: A




Inductive NAMUR dual sensor for valve actuators


IND2004DN/T1/1D/2G

Electrical connection - plug

Connector: Rd24; coding: A



Connection

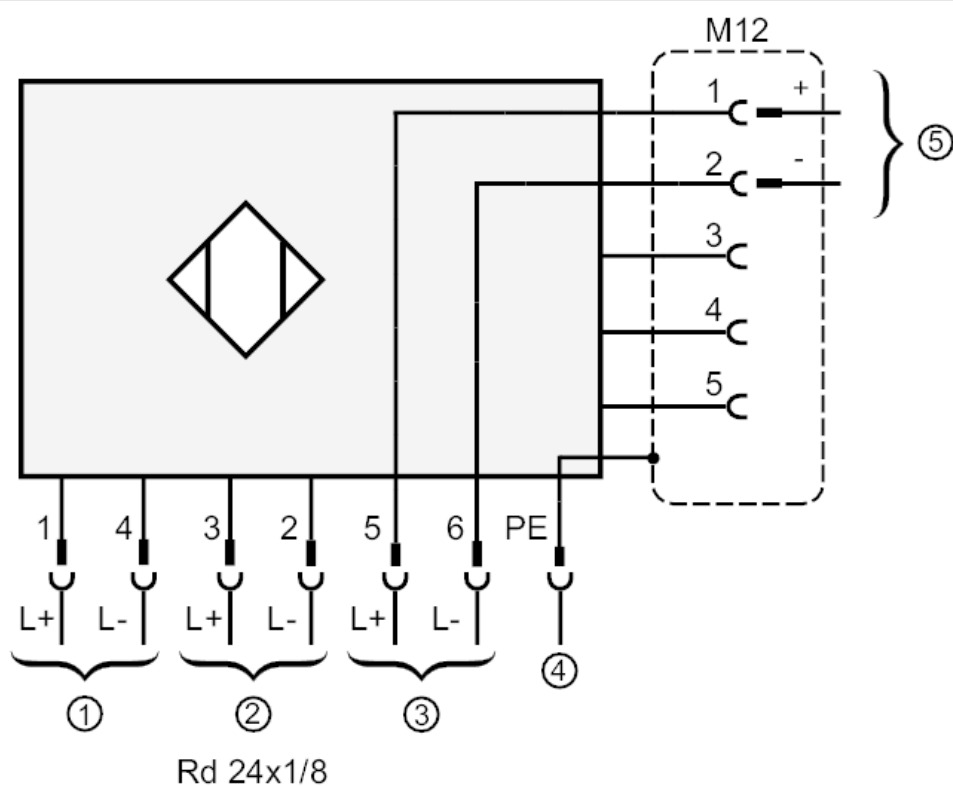

- | | |
|-----|---|
| 1 = | sensor 1 |
| 2 = | sensor 2 |
| 3 = | Single solenoid valve Ex-i |
| 4 = | Potential equalization plug housing Connector M12 |
| 5 = | Single solenoid valve Ex-i |