


O5D159



Laser distance sensor

O5DLCPKG/IR/US

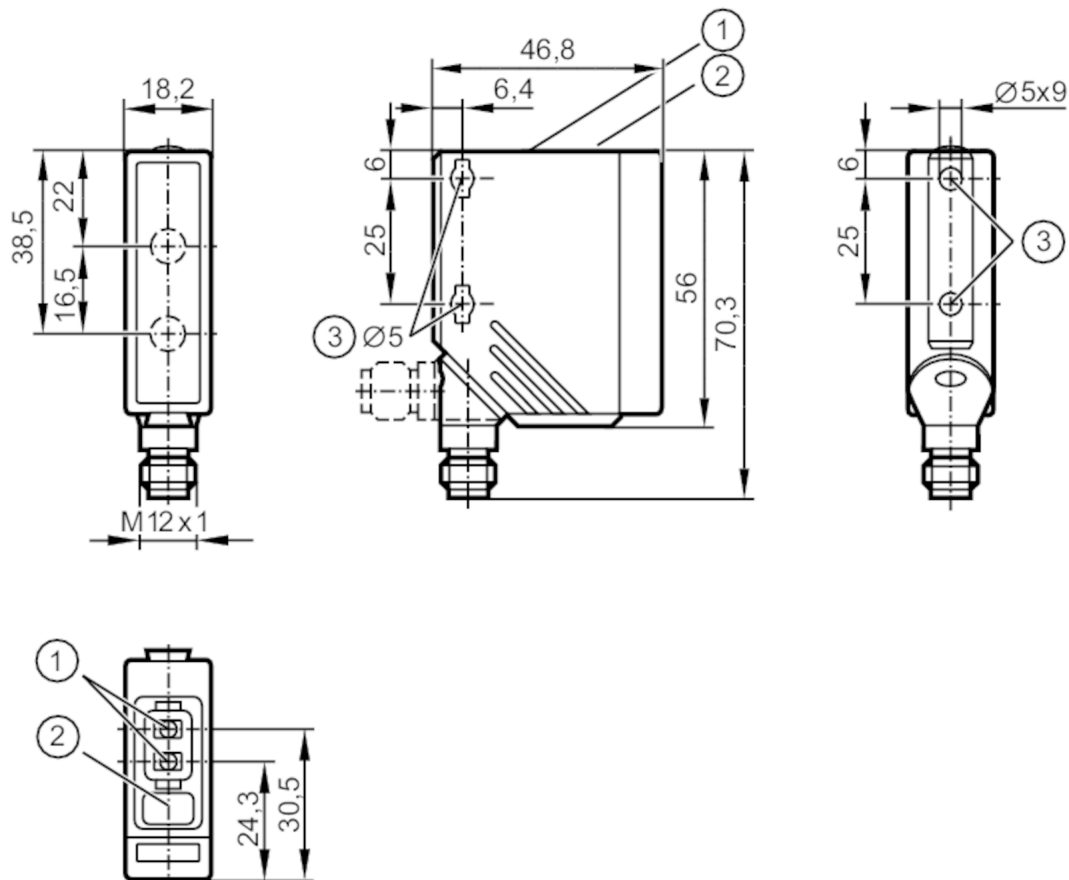

- 1: setting pushbuttons
2: alphanumeric display 3-digit
3: Tightening torque < 2 Nm when using a mounting screw M5



Product characteristics

Type of light	Infrared light
Laser protection class	1
Housing	rectangular

Application

System	Background suppression
--------	------------------------

Electrical data

Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Current consumption	[mA]	< 75; (24 V)
Protection class		III
Reverse polarity protection		yes
Type of light		Infrared light
Wave length	[nm]	850
Typ. lifetime	[h]	50000

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 2
------------------------------	------------------------------



Laser distance sensor

O5DLCPKG/IR/US

Outputs		
Total number of outputs		2
Electrical design		PNP
Number of digital outputs		2
Output function		normally open / closed; (complementary)
Max. current load per output [mA]		100
Switching frequency DC [Hz]		11
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Monitoring range		
Max. light spot diameter [mm]		5
Light spot dimensions refer to		2 m
Detection range hysteresis [%]		< 16
Note on monitoring range hysteresis		black 6 % remission
Background suppression available		yes
Background suppression [m]		< 19.2
Measuring/setting range		
Measuring range [m]		0.03...2
Sampling rate [Hz]		33
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
Profiles		Smart Sensor: Sensor Identification; Binary Data Channel; Process Value; Sensor Diagnosis
SIO mode		yes
Process data analog		1
Process data binary		1
Min. process cycle time [ms]		6.6
Operating conditions		
Ambient temperature [°C]		-25...60
Note on ambient temperature		at ta < -10 °C warm-up is necessary, laser is off
Protection		IP 65; IP 67
Max. immunity to extraneous light [klx]		8; (on the object)
Tests / approvals		
EMC	EN 60947-5-2	
Vibration resistance	DIN EN 60068-2-6	10 g (10...55 Hz) / 120 min. per axis (x, y, z)
Shock resistance	DIN EN 60068-2-27	50 g 6 shocks / 11 ms half-sine (x, y, z)
Laser protection class		1

O5D159



Laser distance sensor

O5DLCPKG/IR/US

Notes on laser protection	Caution:	Laser light
	laser class:	1
		EN / IEC60825-1:2007
		EN / IEC60825-1:2014
		Complies with 21 CFR 1040.10 except for conformance with IEC 60825-1 Ed. 3, as described in Laser Notice No. 56, dated May 8, 2019.
MTTF	[years]	203
UL approval	Ta	-25...60 °C
	Enclosure type	Type 1
	voltage supply	Class 2
	File number UL	E174191

Mechanical data

Weight	[g]	84.4
Housing		rectangular
Dimensions	[mm]	56 x 18.2 x 46.8
Material		housing: PA; Front framework: stainless steel; operator interface: TPU (urethane); lens: PMMA
Lens alignment		Side sensing

Displays / operating elements

Display	Switching status	LED, yellow
	Power	LED, green
	Display	alphanumeric display, 3-digit
Display unit		cm

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A




O5D159



Laser distance sensor

O5DLCPKG/IR/US

Connection

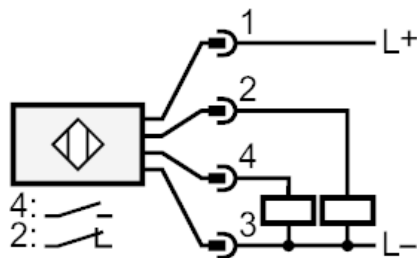


4: OUT / IO-Link

Other data

	Accuracy			
distance	black (6 % remission)	white (90 % remission)		
0 mm	± 25 mm	± 25 mm		
500 mm	± 25 mm	± 25 mm		
1000 mm	± 25 mm	± 25 mm		
1500 mm	± 40 mm	± 30 mm		
2000 mm	± 50 mm	± 30 mm		

Diagrams and graphs

Hysteresis graph

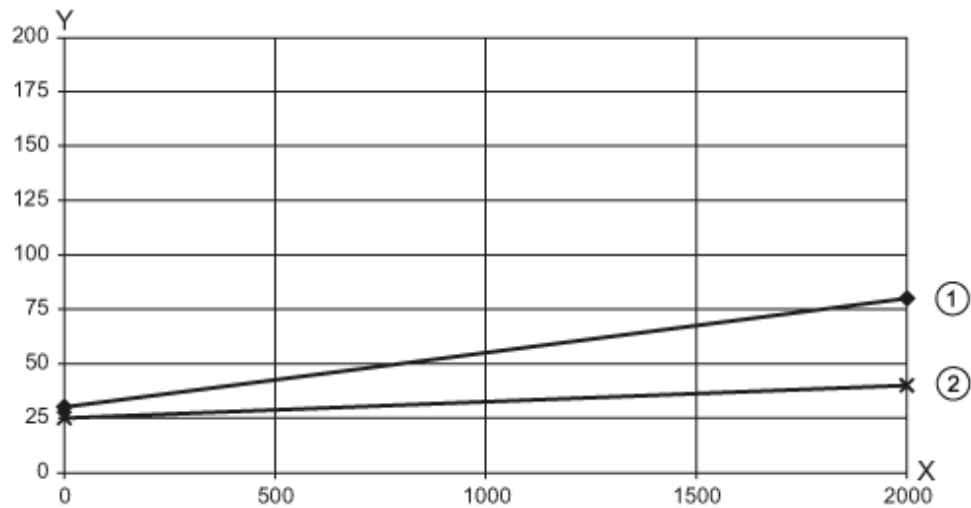

x: distance [mm]
y: Hysteresis [mm]
1 = background black 6 % remission
2 = background white 90 % remission