




Retro-reflective sensor

OFP-FPKG

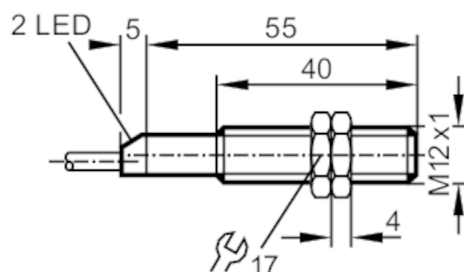

Product characteristics

Type of light	red light
Housing	Threaded type

Application

System	polarization filter
Function principle	Retro-reflective sensor

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 30
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	660

Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	320
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

Monitoring range

Range referred to prismatic reflector	[m]	0.2...0.8; (Prismatic reflector Ø 80 E20005)
Max. light spot diameter	[mm]	70
Light spot dimensions refer to		at maximum range
Polarization filter available		yes

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 67



OF5024



Retro-reflective sensor

OFP-FPKG

Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	895
Mechanical data		
Weight	[g]	73.3
Housing		Threaded type
Dimensions	[mm]	M12 x 1 / L = 60
Thread designation		M12 x 1
Material		brass nickel-plated
Lens material		PMMA
Displays / operating elements		
Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
Accessories		
Items supplied		lock nuts: 2
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 2 m, PUR; 3 x 0.34 mm²		
Connection		

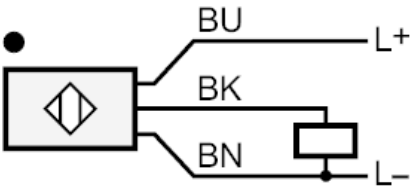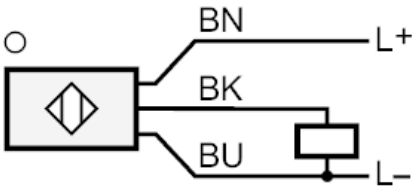

BN =

BU =

BK =

Core colors :

brown

blue

black



Retro-reflective sensor

OFP-FPKG

Diagrams and graphs

excess gain graph

