




Diffuse reflection sensors with background suppression

OGH-HPKG/US/CUBE/100MM

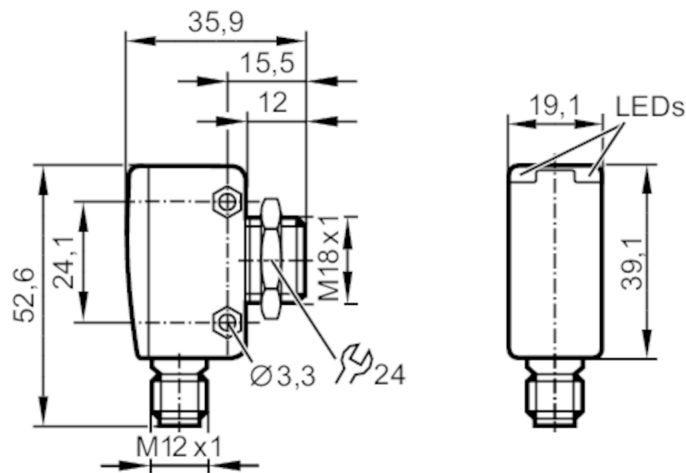

transmitter in lower lens
Receiver in upper lens



Product characteristics

Type of light	red light
Housing	rectangular with M18 thread

Application

System	Background suppression
Function principle	Diffuse reflection sensor

Electrical data

Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Rated insulation voltage	[V]	32
Current consumption	[mA]	25
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	300
Type of light		red light
Wave length	[nm]	645

Outputs

Electrical design		PNP
Output function		light-on mode
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)

Monitoring range

Range	[mm]	< 100; (white paper 200 x 200 mm 90 % remission)
-------	------	--



Diffuse reflection sensors with background suppression

OGH-HPKG/US/CUBE/100MM

Range on white object (90 % remission) [mm]	< 100
Range on grey object (18 % remission) [mm]	< 100
Range on black object (6 % remission) [mm]	< 100
Range adjustable	no
Max. light spot diameter [mm]	7
Light spot dimensions refer to	at maximum range
Background suppression available	yes

Interfaces

Communication interface	IO-Link								
Transmission type	COM2 (38,4 kBaud)								
IO-Link revision	1.1								
SDCI standard	IEC 61131-9								
Profiles	Measuring Sensor, Identification and Diagnosis, Switching Signal Channel, Teach Channel								
SIO mode	yes								
Required master port class	A								
Min. process cycle time [ms]	10								
IO-Link process data (cyclical)	<table> <tr> <th>Function</th><th>bit length</th></tr> <tr> <td>process value</td><td>16</td></tr> <tr> <td>device status</td><td>4</td></tr> <tr> <td>binary switching information</td><td>1</td></tr> </table>	Function	bit length	process value	16	device status	4	binary switching information	1
Function	bit length								
process value	16								
device status	4								
binary switching information	1								
IO-Link functions (acyclical)	application specific tag; operating hours counter; switching cycles counter								
Supported DeviceIDs	<table> <tr> <th>Type of operation</th><th>DeviceID</th></tr> <tr> <td>default</td><td>1131</td></tr> </table>	Type of operation	DeviceID	default	1131				
Type of operation	DeviceID								
default	1131								
Note	For further information please see the IODD PDF file at "Downloads"								

Operating conditions

Ambient temperature [°C]	-25...60
Storage temperature [°C]	-40...60
Protection	IP 65; IP 67

Tests / approvals

EMC	EN 60947-5-2								
MTTF [years]	782								
UL approval	<table> <tr> <td>Ta</td><td>-25...60 °C</td></tr> <tr> <td>Enclosure type</td><td>Type 1</td></tr> <tr> <td>voltage supply</td><td>Class 2</td></tr> <tr> <td>File number UL</td><td>E174191</td></tr> </table>	Ta	-25...60 °C	Enclosure type	Type 1	voltage supply	Class 2	File number UL	E174191
Ta	-25...60 °C								
Enclosure type	Type 1								
voltage supply	Class 2								
File number UL	E174191								

Mechanical data

Weight [g]	59.5
Housing	rectangular with M18 thread
Dimensions [mm]	52.6 x 19.1 x 35.9
Thread designation	M18 x 1
Material	diecast zinc; PEI
Lens material	PEI



Diffuse reflection sensors with background suppression

OGH-HPKG/US/CUBE/100MM


Lens alignment		Side sensing	
Displays / operating elements			
Display	Switching status	1 x LED, yellow	
	Power	1 x LED, green	
Accessories			
Items supplied	lock nut: 1		
Remarks			
Pack quantity	1 pcs.		

Electrical connection

Connector: 1 x M12; coding: A



Connection

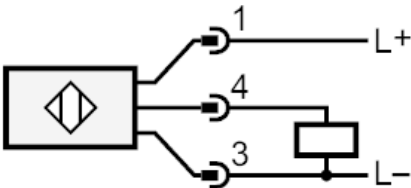



Diffuse reflection sensors with background suppression

OGH-HPKG/US/CUBE/100MM

Other data

Repeatability / precision: 6 σ

	Repeatability of the measured values	
Abstand	white (90 % remission)	black (6 %...90 % remission)
20 mm	0.5 mm	1.0 mm
50 mm	0.8 mm	2.0 mm
100 mm	1.5 mm	4.5 mm
	Accuracy	
Abstand	white (90 % remission)	black (6 %...90 % remission)
20 mm	± 1.5 mm	± 1.8 mm
50 mm	± 3.0 mm	± 3.5 mm
100 mm	± 5.0 mm	± 6.5 mm

The values apply at

Extraneous light on the object	< 10 klx
constant ambient conditions	23 °C / 960 hPa
minimum power-on time in minutes	10