




Diffuse reflection sensor

OGTIFPKG/US

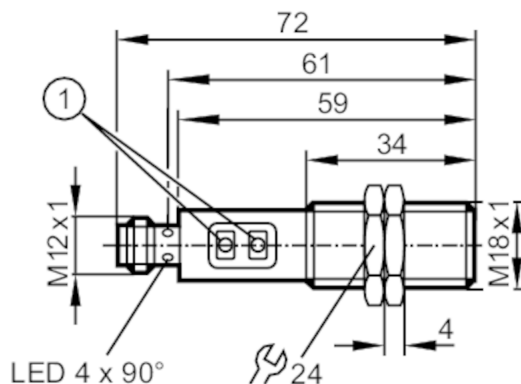

1 Programming buttons



Product characteristics

Type of light	Infrared light
Housing	Threaded type

Application

Function principle	Diffuse reflection sensor
--------------------	---------------------------

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	25
Protection class		II
Reverse polarity protection		yes
Type of light		Infrared light
Wave length	[nm]	855

Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	150; (200 (...60 °C))
Switching frequency DC	[Hz]	2000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

Monitoring range

Range	[mm]	2...600; (white paper 200 x 200 mm 90 % remission)
Factory setting		light-on mode
Setting range	[mm]	150...600
Range adjustable		yes
Max. light spot diameter	[mm]	66



Diffuse reflection sensor

OGTIFPKG/US

Light spot dimensions refer to _____ at maximum range

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 65; IP 67; IP 68; IP 69K

Tests / approvals

EMC		EN 60947-5-2
MTTF	[years]	1076

Mechanical data

Weight	[g]	61.1
Housing		Threaded type
Dimensions	[mm]	M18 x 1 / L = 72
Thread designation		M18 x 1
Material		stainless steel (1.4404 / 316L); PA; LCP; EPDM; TPU (urethane)
Lens material		PMMA

Displays / operating elements

Display	Switching status	1 x LED, yellow
Teach function		yes
Electronic lock		yes

Accessories

Items supplied		lock nuts: 2
----------------	--	--------------

Remarks

Remarks		cULus - Class 2 source required
Pack quantity		1 pcs.

Electrical connection

Connector: 1 x M12; coding: A






Diffuse reflection sensor


OGTIFPKG/US

Connection

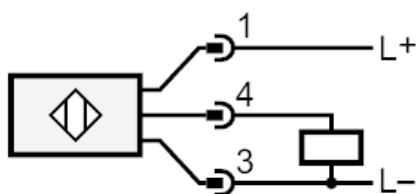

Diagrams and graphs

excess gain graph

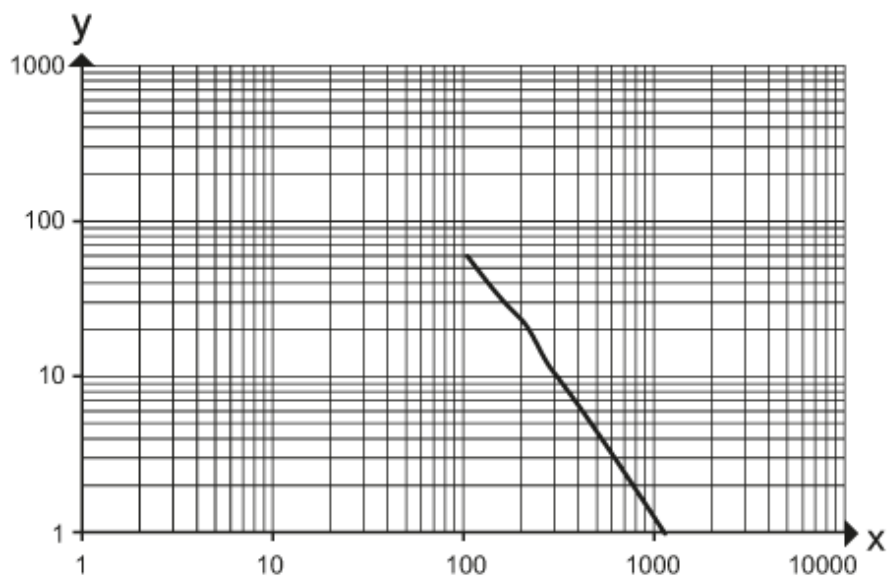

x: distance [mm]

y: excess gain factor