

OUR-HPKG/US-100-DPO

Receiver in upper lens
transmitter in lower lens



OU5070




Retro-reflective sensor


OUR-HPKG/US-100-DPO

Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	685
Mechanical data		
Weight	[g]	74.5
Housing		rectangular
Dimensions	[mm]	28 x 16 x 51
Material		PPO modified
Lens material		glass
Lens alignment		Side sensing
Displays / operating elements		
Display	Switching status	1 x LED, yellow
Accessories		
Items supplied		Angle bracket: 1, E20211
Remarks		
Pack quantity		1 pcs.
Electrical connection		

Connector: 1 x M12; coding: A



Connection

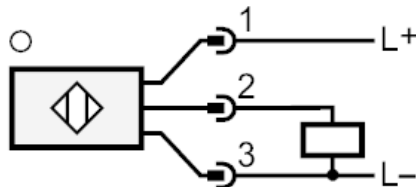



Retro-reflective sensor

OUR-HPKG/US-100-DPO

Diagrams and graphs

excess gain graph

