



Flush pressure sensor with display

PI-,10BREA01-MFRKG/US/ /P



1 alphanumeric display 4-digit

2 status LEDs

3 Programming button

4 G1 sealing cone external thread

Attention: The unit must only be installed in a process connection for G1 sealing cone.
The G1A sealing cone of the unit is only suited for adapters with metal end stop.

5 groove with sealing ring



ACS



CRN



EC 1935/2004

EHEDG

Tested

FCM

FDA

IO-Link

Reg31

UK

CA

Product characteristics

Number of inputs and outputs

Number of digital outputs: 2; Number of analog outputs: 1

Measuring range

-0.005...0.1 bar

-5...100 mbar

-2...40.15 inH2O

-0.5...10 kPa

Process connection

threaded connection G 1 external thread sealing cone Attention: The unit must only be installed in a process connection for G1 sealing cone.; The G1A sealing cone of the unit is only suited for adapters with metal end stop.

Application

System

gold-plated contacts

Application

flush mountable for the food and beverage industry

Media

viscous media and liquids with suspended particles; liquids and gases

Medium temperature

[°C]

-25...150

Min. bursting pressure

30000 mbar

12044 inH2O

3000 kPa

Pressure rating

4000 mbar

1606 inH2O

400 kPa

Vacuum resistance

-1000 mbar

-0.1 MPa

Type of pressure

relative pressure; vacuum

No dead space

yes

MAWP (for applications according to CRN)

[bar]

4



Flush pressure sensor with display

PI-,10BREA01-MFRKG/US/ /P

Electrical data					
Min. insulation resistance	[MΩ]	100; (500 V DC)			
Protection class		III			
Reverse polarity protection		yes			
Integrated watchdog		yes			
2-wire					
Operating voltage	[V]	20...30 DC			
Current consumption	[mA]	3.5...21.5			
Power-on delay time	[s]	< 1			
3-wire					
Operating voltage	[V]	18...30 DC			
Current consumption	[mA]	5...45; (430 bei max. Laststrom)			
Power-on delay time	[s]	< 0.5			
Inputs / outputs					
Number of inputs and outputs		Number of digital outputs: 2; Number of analog outputs: 1			
Outputs					
Total number of outputs		2			
Output signal		switching signal; analog signal; IO-Link			
Electrical design		PNP/NPN			
Number of digital outputs		2			
Output function		normally open / closed; (configurable)			
Number of analog outputs		1			
Analog current output	[mA]	4...20, invertible; (scalable)			
Short-circuit protection		yes			
Type of short-circuit protection		yes (non-latching)			
Overload protection		yes			
2-wire					
Max. load	[Ω]	300			
3-wire					
Max. voltage drop switching output DC	[V]	2			
Permanent current rating of switching output DC	[mA]	100			
Switching frequency DC	[Hz]	125			
Max. load	[Ω]	(Ub - 10 V) / 21,5 mA; 650 Ω (Ub = 24 V)			
Measuring/setting range					
Measuring range		-0.005...0.1 bar	-5...100 mbar	-2...40.15 inH2O	-0.5...10 kPa
Set point SP		-0.0049...0.1 bar	-4.9...100 mbar	-1.95...40.15 inH2O	-0.49...10 kPa
Reset point rP		-0.005...0.099 bar	-5...99.9 mbar	-2.01...40.09 inH2O	-0.5...9.99 kPa
Analog start point		-0.005...0.08 bar	-5...80 mbar	-2.01...32.12 inH2O	-0.5...8 kPa
Analog end point		0.015...0.1 bar	15...100 mbar	6.02...40.15 inH2O	1.5...10 kPa
Min. difference between SP and rP		0.0002 bar	0.2 mbar	0.06 inH2O	0.02 kPa
In steps of		0.0001 bar	0.1 mbar	0.01 inH2O	0.01 kPa



Flush pressure sensor with display

PI-,10BREA01-MFRKG/US/ /P

Factory setting		SP1 =25 mbar	rP1 = 23 mbar
		SP2 = 75 mbar	rP2 = 73 mbar
		ASP = 0 mbar	AEP = 100 mbar
		dAP = 2.00 s	dAA =2.00 s
Temperature monitoring			
Measuring range		-25...150 °C	-13...302 °F
Accuracy / deviations			
Switch point accuracy [% of the span]		< ± 0,5; (DIN EN IEC 62828-1; Turn down 1:1)	
Repeatability [% of the span]		< ± 0,2; (with temperature fluctuations < 10 K; Turn down 1:1)	
Characteristics deviation [% of the span]		< ± 0,5; (DIN IEC EN 62828-1 incl. zero point and span error, non-linearity, hysteresis; Turn down 1:1)	
Linearity deviation [% of the span]		< ± 0,25; (Turn down 1:1)	
Hysteresis deviation [% of the span]		< ± 0,2; (Turn down 1:1)	
Long-term stability [% of the span]		< ± 0,1; (Turn down 1:1; per year)	
Total deviation over temperature range		Temperature range	total deviation
		-25...15 °C	Characteristics deviation ± 0,15 % of the span / 10 K
		15...80 °C	Characteristics deviation
		80...150 °C	Characteristics deviation ± 0,2 % of the span / 10 K
Notes on the accuracy / deviation		for further details see section Diagrams and graphs	
Temperature monitoring			
Accuracy	[K]	± 2,5+ (0,08 x (Umgebungstemperatur - Mediumtemperatur))	
Repeatability	[K]	± 0,2	
Resolution	[K]	0.2	
Reaction times			
Damping process value dAP	[s]	0...99.99	
Damping for the analog output dAA	[s]	0...99.99	
2-wire			
Step response time analog output	[ms]	30	
3-wire			
Min. response time of switching output (dAP)	[ms]	3	
Step response time analog output	[ms]	7	
Temperature monitoring			
Dynamic response T05 / T09		[s]	< 35 / < 135; (DIN EN 60751 water ; > 0,9 m/s)
Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38.4 kBaud)	



Flush pressure sensor with display

PI-,10BREA01-MFRKG/US/ /P

IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Function class	Description
	0x4000	Identification and Diagnosis
	0x800A	Measurement Data Channel (standard resolution)
SIO mode	yes	
Required master port class	A	
Min. process cycle time [ms]	5.6	
IO-Link resolution pressure [mbar]	0.005	
IO-Link resolution temperature [K]	0.2	
IO-Link process data (cyclical)	Function	bit length
	pressure	32
	temperature	32
	device status	4
	binary switching information	2
IO-Link functions (acyclical)	application specific tag; internal temperature; operating hours counter; switching cycles counter; Pressure peak counter	
Supported DeviceIDs	Type of operation	DeviceID
	default	1158

Operating conditions

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...100
Protection	IP 67; IP 68; IP 69K

Tests / approvals

EMC	DIN EN 61326-1	
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF [years]	214	
Note on approval	Factory certificate available as download at www.factory-certificate.ifm	
UL approval	UL approval number	J049
	File number UL	E174189

Mechanical data

Weight [g]	384.8
Housing	tubular
Dimensions [mm]	Ø 50 / L = 106
Material	stainless steel (1.4404 / 316L); FKM; PTFE; PBT; PEI; PFA
Materials (wetted parts)	ceramics (99.9 % Al ₂ O ₃); stainless steel (1.4435 / 316L); surface characteristics: Ra < 0,4 / Rz 4; PTFE
Min. pressure cycles	100 million
Tightening torque [Nm]	20
Process connection	threaded connection G 1 external thread sealing cone Attention: The unit must only be installed in a process connection for G1 sealing cone.; The G1A sealing cone of the unit is only suited for adapters with metal end stop.

PI1889



Flush pressure sensor with display

PI-,10BREA01-MFRKG/US/ /P

Displays / operating elements		
Display	Display unit	LED, green
	Switching status	LED, yellow
	Function display	alphanumeric display, 4-digit
	Measured values	alphanumeric display, 4-digit
Display unit	mbar; kPa; inH2O	

Remarks	
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated


A diagram of an M12 connector with four pins arranged in a circle. The pins are numbered 1, 2, 3, and 4 in a clockwise direction starting from the top-right position. Pin 1 is at the top-right, pin 2 is at the top-left, pin 3 is at the bottom-left, and pin 4 is at the bottom-right.



Flush pressure sensor with display

PI-,10BREA01-MFRKG/US/ /P

Connection

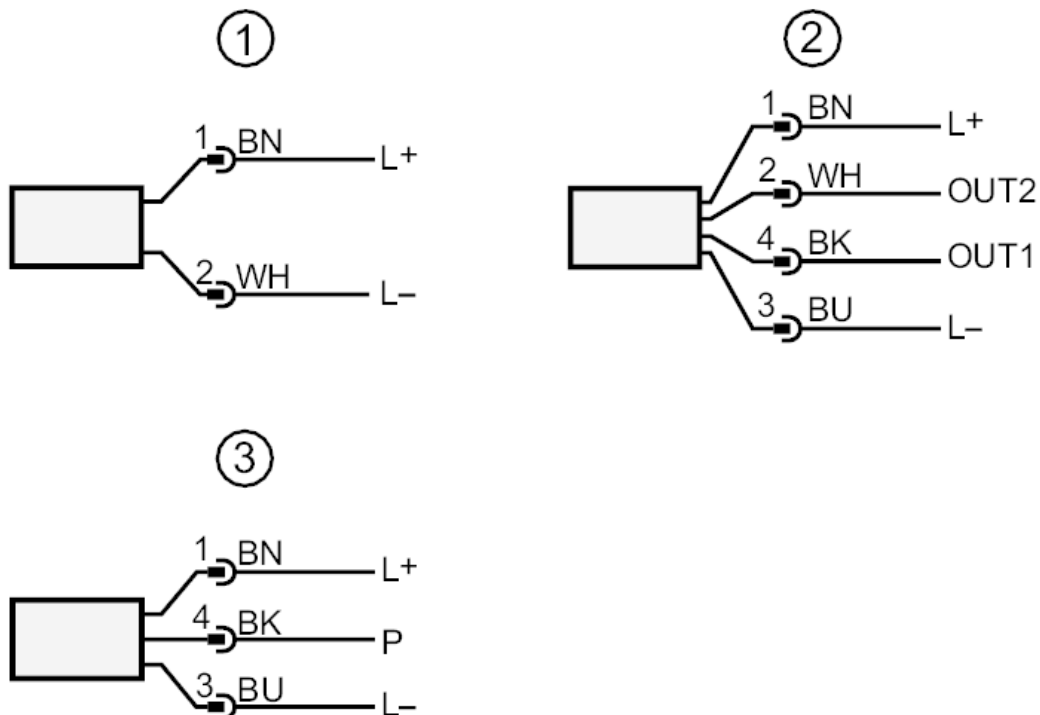

- 1 connection for 2-wire operation
 2 connection for 3-wire operation
 OUT1 Switching output / IO-Link
 OUT2 Switching output / analog output
 3 connection for IO-Link parameter setting (P = communication via IO-Link)
- Colors to DIN EN 60947-5-2
 Core colors
 BK = black
 BN = brown
 BU = blue
 WH = white


PI1889



Flush pressure sensor with display

PI-,10BREA01-MFRKG/US/ /P

Diagrams and graphs

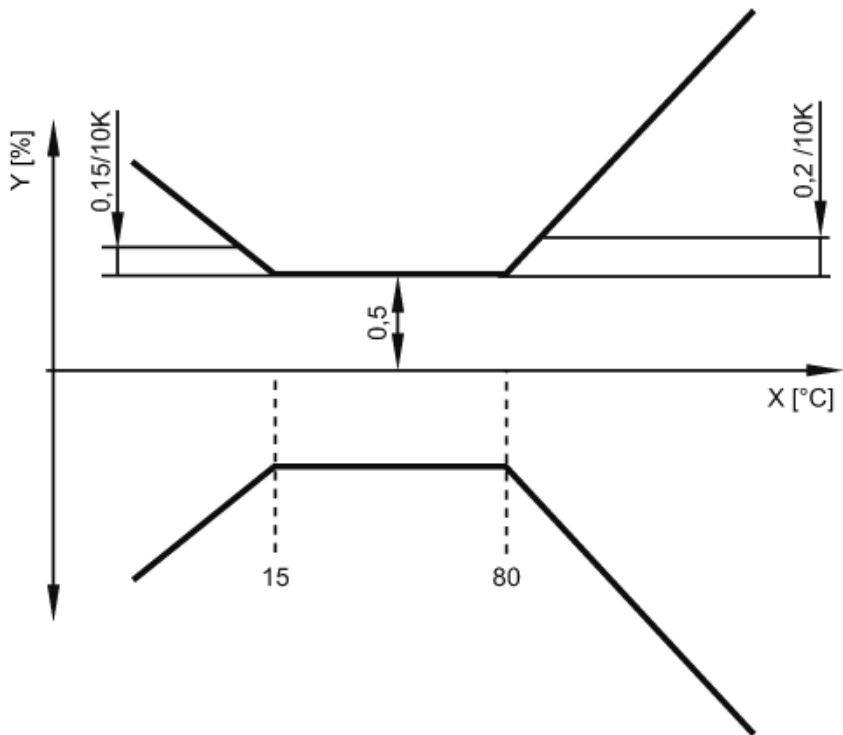

X temperature
Y total deviation