


PQ3834



Pressure sensor for pneumatics

PQ-010-KHR18-KFPKG/AS/

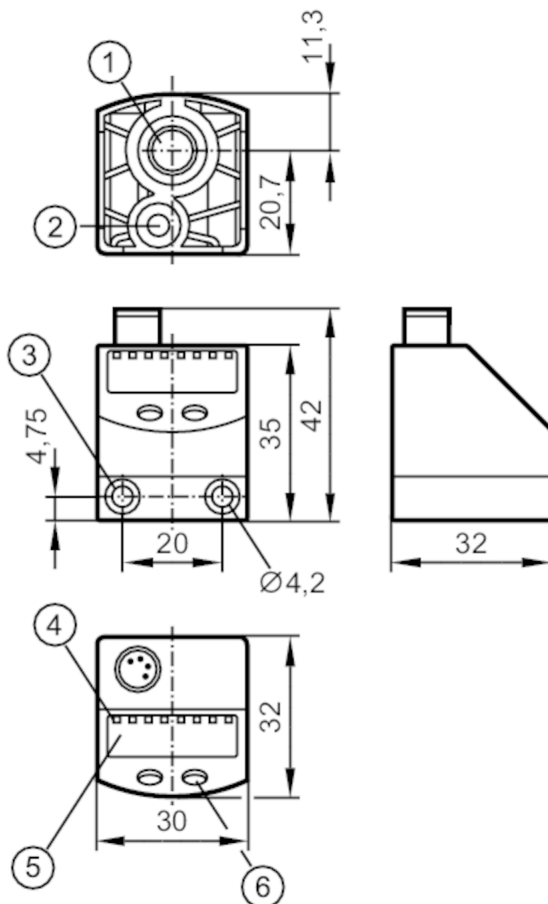

- 1 main pressure connection G 1/8 Tightening torque < 8 Nm insertion depth < 7.5 mm
- 2 auxiliary pressure connection M 5 Tightening torque < 2.5 Nm insertion depth < 7.5 mm
- 3 Tightening torque < 0.5 Nm
- 4 LEDs Display unit / Switching status
- 5 alphanumeric display 4-digit
- 6 Programming button




Product characteristics

Number of inputs and outputs	Number of digital outputs: 1; Number of analog outputs: 1			
Measuring range	-1...10 bar	-15...145 psi	-30...296 inHg	-100...1000 kPa
Process connection	threaded connection G 1/8 Internal thread Internal thread:M5			

Application

System	gold-plated contacts			
Application	for industrial applications			
Conditionally suitable for	other media on request			
Medium temperature [°C]	0...60			
Min. bursting pressure	30 bar	435 psi	886 inHg	3000 kPa
Note on min. burst pressure	max. overpressure on second pressure connection: 12 bar / 1200 kPa / 174 PSI / 354,4 inHg / 1,2 MPa			
Pressure rating	20 bar	290 psi	591 inHg	2000 kPa
Vacuum resistance	-1000 mbar		-0.1 MPa	
Type of pressure	relative pressure; differential pressure; vacuum			



Pressure sensor for pneumatics

PQ-010-KHR18-KFPKG/AS/

Electrical data				
Operating voltage	[V]	18...32 DC; (to SELV/PELV)		
Current consumption	[mA]	< 50		
Min. insulation resistance	[MΩ]	100; (500 V DC)		
Protection class		III		
Reverse polarity protection		yes		
Overvoltage protection		yes; (< 40 V)		
Power-on delay time	[s]	0.5		
Integrated watchdog		yes		
Inputs / outputs				
Number of inputs and outputs		Number of digital outputs: 1; Number of analog outputs: 1		
Outputs				
Total number of outputs		2		
Output signal		switching signal; analog signal; IO-Link; (configurable)		
Electrical design		PNP		
Number of digital outputs		1		
Output function		normally open / closed; (configurable)		
Max. voltage drop switching output DC	[V]	2		
Permanent current rating of switching output DC	[mA]	100		
Switching frequency DC	[Hz]	< 100		
Number of analog outputs		1		
Analog current output	[mA]	4...20		
Max. load	[Ω]	500		
Short-circuit protection		yes		
Type of short-circuit protection		yes (non-latching)		
Measuring/setting range				
Measuring range		-1...10 bar	-15...145 psi	-30...296 inHg
Set point SP		-0.9...10 bar	-13...145 psi	-26...296 inHg
Reset point rP		-0.95...9.95 bar	-14...144 psi	-28...294 inHg
In steps of		0.05 bar	1 psi	2 inHg
				5 kPa
Accuracy / deviations				
Switch point accuracy		< ± 0,5		
	[% of the span]			
Repeatability	[% of the span]	< ± 0,1; (with temperature fluctuations < 10 K)		
Characteristics deviation		< ± 0,25 (BFSL) / < ± 0,5 (LS); (BFSL = Best Fit Straight Line; LS = limit value setting)		
	[% of the span]			
Hysteresis deviation		< ± 0,25		
	[% of the span]			
Long-term stability		< ± 0,05; (per 6 months)		
	[% of the span]			
Temperature coefficient zero point		0,2; (0...60 °C)		
	[% of the span / 10 K]			

PQ3834



Pressure sensor for pneumatics

PQ-010-KHR18-KFPKG/AS/

Temperature coefficient span [% of the span / 10 K]		0,2; (0...60 °C)	
Reaction times			
Response time [ms]		< 6	
Delay time programmable dS, dr [s]		0; 0,002...5	
Step response time analog output [ms]		6	
Software / programming			
Parameter setting options		hysteresis / window; normally open / closed; analog output; IO-Link; switching logic; switch-on/switch-off delay; Damping; Display unit	
Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1	
SDCI standard		IEC 61131-9 FDIS	
Profiles		Smart Sensor: Process Data Variable; Device Identification	
SIO mode		yes	
Required master port class		A	
Process data analog		1	
Process data binary		2	
Min. process cycle time [ms]		2.3	
Supported DeviceIDs		Type of operation	DeviceID
		default	367
Operating conditions			
Ambient temperature [°C]		0...70	
Storage temperature [°C]		-25...85	
Protection		IP 65	
Tests / approvals			
EMC		DIN EN 61000-6-2	
		DIN EN 61000-6-3	
Shock resistance		DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance		DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF [years]		437	
Pressure equipment directive		sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data			
Weight [g]		87	
Housing		rectangular	
Dimensions [mm]		42 x 30 x 32	
Material		PBT; FKM; polyester	
Materials (wetted parts)		brass; FKM; silicon (coated); PBT	
Min. pressure cycles		50 million	
Process connection		threaded connection G 1/8 Internal thread Internal thread:M5	

PQ3834



Pressure sensor for pneumatics


PQ-010-KHR18-KFPKG/AS/

Displays / operating elements		
Display	Display unit	4 x LED, green
	Switching status	1 x LED, yellow
	Function display	alphanumeric display, 4-digit
	Measured values	alphanumeric display, 4-digit
Display unit	bar; kPa; psi; inHg	


Remarks	
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M8; coding: A; Contacts: gold-plated



Connection

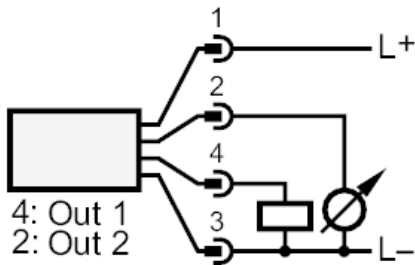

OUT1	Switching output
	IO-Link
OUT2	analog output