


PY2006



Flush pressure sensor

PM-2,5-REA01-E-ZVG/US

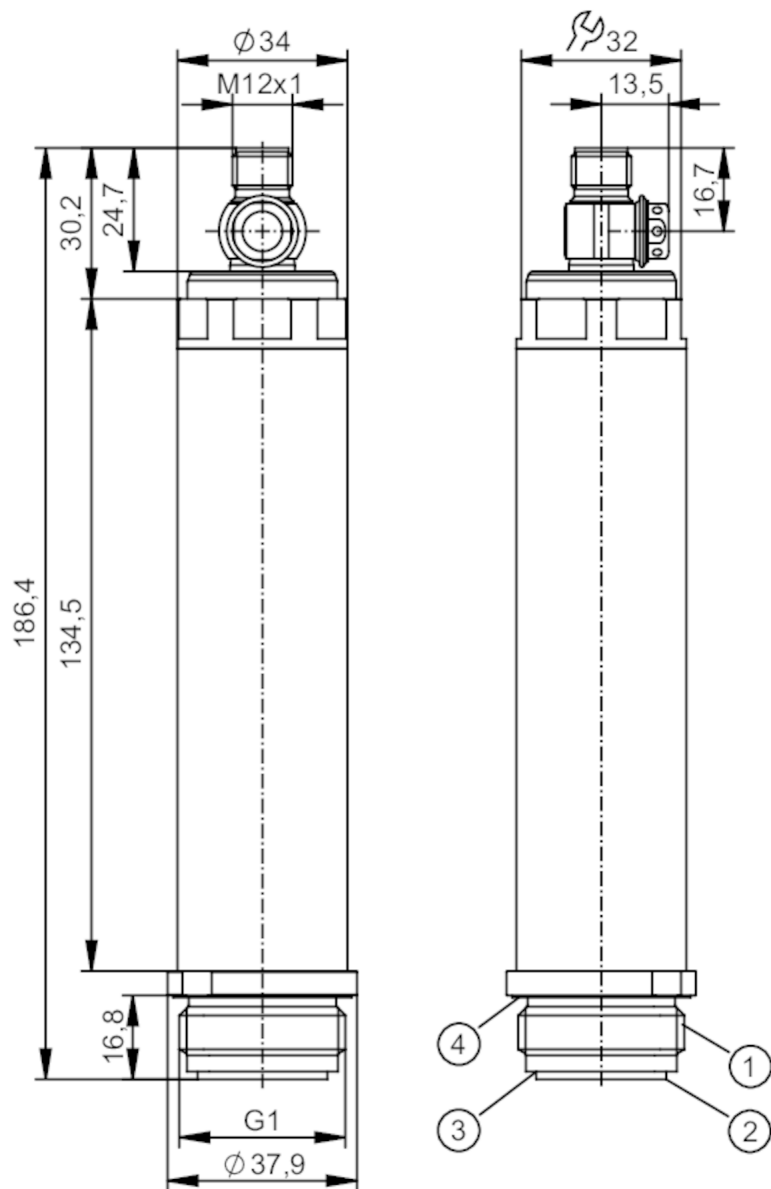

- 1 external thread G1 (Aseptoflex Vario)
- 2 area for metal sealing (Aseptoflex Vario)
- 3 groove for sealing ring (Aseptoflex Vario)
- 4 groove for sealing ring (DIN EN ISO 1179-2)



Product characteristics

Number of inputs and outputs	Number of analog outputs: 1		
Measuring range	-125...2500 mbar	-1.82...36.26 psi	-12.5...250 kPa
Process connection	threaded connection G 1 external thread Aseptoflex Vario		

Application

System	gold-plated contacts
Measuring element	ceramic-capacitive pressure measuring cell
Application	flush mountable for the food and beverage industry
Media	viscous media and liquids with suspended particles; liquids and gases
Medium temperature [°C]	-25...85; (125: < 1 h)



Flush pressure sensor

PM-2,5-REA01-E-ZVG/US

Min. bursting pressure	50000 mbar	725 psi	5000 kPa
Pressure rating	20000 mbar	290 psi	2000 kPa
Vacuum resistance [mbar]	-1000		
Type of pressure	relative pressure		
No dead space	yes		
MAWP (for applications according to CRN) [bar]	20		

Electrical data			
Operating voltage [V]	18...30 DC		
Min. insulation resistance [MΩ]	100; (500 V DC)		
Protection class	III		
Reverse polarity protection	yes		
Integrated watchdog	yes		

2-wire		
Current consumption	[mA]	3.5...21.5
Power-on delay time	[s]	1
3-wire		
Current consumption	[mA]	< 45
Power-on delay time	[s]	0.5

Inputs / outputs	
Number of inputs and outputs	Number of analog outputs: 1

Outputs	
Total number of outputs	1
Output signal	analog signal; (configurable)
Number of analog outputs	1
Analog current output [mA]	4...20; (scalable)
Max. load [Ω]	700; (U _b = 24 V; (U _b - 9 V) / 21.5 mA)
Short-circuit proof	yes
Overload protection	yes

Measuring/setting range			
Measuring range	-125...2500 mbar	-1.82...36.26 psi	-12.5...250 kPa
Analog start point	-125...2000 mbar	-1.82...29 psi	-12.5...200 kPa
Analog end point	375...2500 mbar	5.44...36.26 psi	-37.5...250 kPa
In steps of	1 mbar	0.02 psi	0.1 kPa
Factory setting	ASP = 0.0 mbar	AEP = 2500 mbar	

Accuracy / deviations	
Repeatability [% of the span]	< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)
Characteristics deviation [% of the span]	< ± 0,2; (linearity incl. hysteresis and repeatability, limit value setting to DIN EN IEC 62828-1)
Linearity deviation [% of the span]	< ± 0,15; (Turn down 1:1)
Hysteresis deviation [% of the span]	< ± 0,15; (Turn down 1:1)
Long-term stability [% of the span]	< ± 0,1; (Turn down 1:1; per year)



Flush pressure sensor

PM-2,5-REA01-E-ZVG/US

Total deviation over temperature range	Temperature range		total deviation
	-25...15 °C		Characteristics deviation ± 0,05 % of the span / 10 K
	15...80 °C		Characteristics deviation
	80...125 °C		Characteristics deviation ± 0,1 % of the span / 10 K
Notes on the accuracy / deviation	for further details see section Diagrams and graphs		
Reaction times			
Damping for the analog output dAA	[s]	0...4	
2-wire			
Step response time analog output	[ms]	30	
3-wire			
Step response time analog output	[ms]	7	
Interfaces			
Communication interface	IO-Link		
Transmission type	COM2 (38,4 kBaud)		
IO-Link revision	1.1		
Profiles	Digital Measuring Sensor (0x000A), Identification and Diagnosis (0x4000)		
SIO mode	no		
Required master port class	A		
Process data analog	3		
Min. process cycle time	[ms]	3.2	
Supported DeviceIDs	Type of operation	DeviceID	
	default	1111	
Operating conditions			
Ambient temperature	[°C]	-25...80	
Storage temperature	[°C]	-40...100	
Protection	IP 67; IP 68; IP 69K		
Tests / approvals			
EMC	DIN EN 61000-6-2		
	DIN EN 61000-6-3		
Shock resistance	DIN EN 60068-2-27		50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6		20 g (10...2000 Hz)
MTTF	[years]	323	
UL approval	UL approval number		J025
Mechanical data			
Weight	[g]	554.7	
Housing	tubular		
Dimensions	[mm]	Ø 34 / L = 186.4	
Material	stainless steel (1.4404 / 316L); stainless steel (1.4301 / 304); PBT		
Materials (wetted parts)	ceramics (99.9 % Al2O3); stainless steel (1.4435 / 316L); surface characteristics: Ra 0,4 / Rz 4; PTFE		
Min. pressure cycles	100 million		

PY2006



Flush pressure sensor

PM-2,5-REA01-E-ZVG/US

Tightening torque	[Nm]	35
Process connection	threaded connection G 1 external thread Aseptoflex Vario	
Remarks		
Pack quantity	1 pcs.	

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection



- 1
- connection for 2-wire operation (analog)
- 2
- connection for 3-wire operation (analog / IO-Link)
- OUT1 : IO-Link
- OUT2 : analog output



Flush pressure sensor

PM-2,5-REA01-E-ZVG/US

Diagrams and graphs

ambient temperature influence on the accuracy



X temperature
Y total deviation