




Capacitive sensor

CBN7-F46E-2EU-Y70138043

- Flat housing
- Up to PL c acc. to EN/ISO 13849
- Raised EMC resistance 100 V/m
- 6,5 mm non-flush



Dimensions

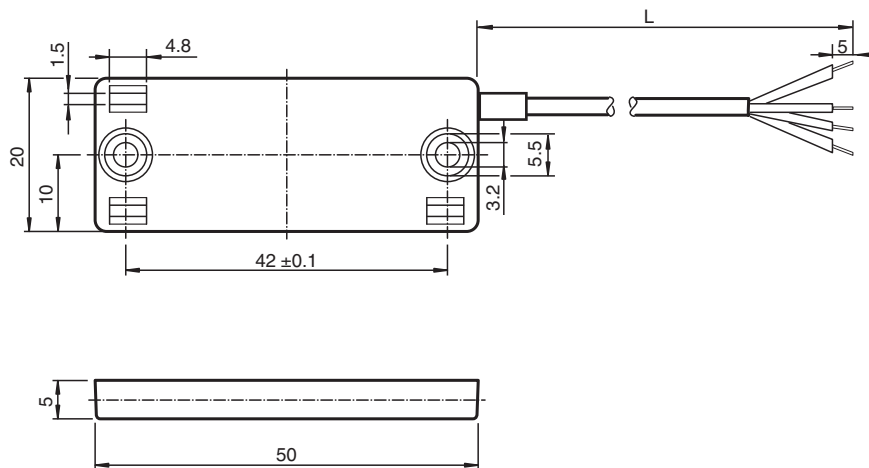

Technical Data

General specifications

Switching function		complementary
Output type		Digital voltage output
Rated operating distance	S_n	6.5 mm
Installation		non-flush
Output polarity		DC
Output type		4-wire

Nominal ratings

Installation conditions		
B		5 mm
C		20 mm
F		20 mm / 50 mm
Operating voltage	U_B	5 V DC $\pm$ 0.5 V
Switching frequency	f	0 ... 5 Hz
Hysteresis	H	1 ... 10 % typ. 5 %
Short-circuit protection		yes
Operating current	I_L	0 ... 10 mA

Release date: 2024-12-10 Date of issue: 2024-12-10 Filename: 70138043_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data


Lowest operating current	I _m	0 mA
Off-state current	I _r	
Off-state current T _U =40 °C, switching element off		≤ 100 µA
No-load supply current	I ₀	≤ 12 mA
Time delay before availability	t _v	≤ 100 ms
Functional safety related parameters		
Performance level (PL)		PL c
MTTF _d		> 7500 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		min. 60 %
Digital output		
Output value		channel 1: object detected: 3 V ± 0,2 V , object not detected: 1 V ± 0,2 V channel 2: object detected: 1 V ± 0,2 V , object not detected: 3 V ± 0,2 V
Compliance with standards and directives		
Standard conformity		
Standards		EN 60947-5-2:2020 EN 60947-5-2/A1:2012 IEC 60947-5-2:2020 IEC 60947-5-2 AMD 1:2012 EN 60947-5-3:2014 EN ISO 13849:2018 EN ISO 13766-2:2018 magnetic field immunity: 6000 A/m according to ISO 11452-8:2015
Approvals and certificates		
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications		
Connection type		flexible leads
Housing material		PBT
Sensing face		PBT
Degree of protection		IP65
Cable		
Cable diameter		0.91 ... 0.96 mm
Material		FEP
Number of cores		4
Core cross section		AWG 24 / 19
Length	L	600 mm
Dimensions		
Height		20 mm
Width		50 mm
Length		5 mm

Connection





Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Installation Conditions

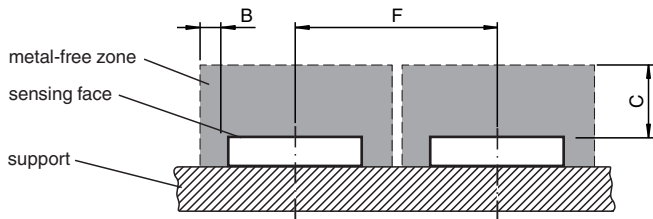

Operation

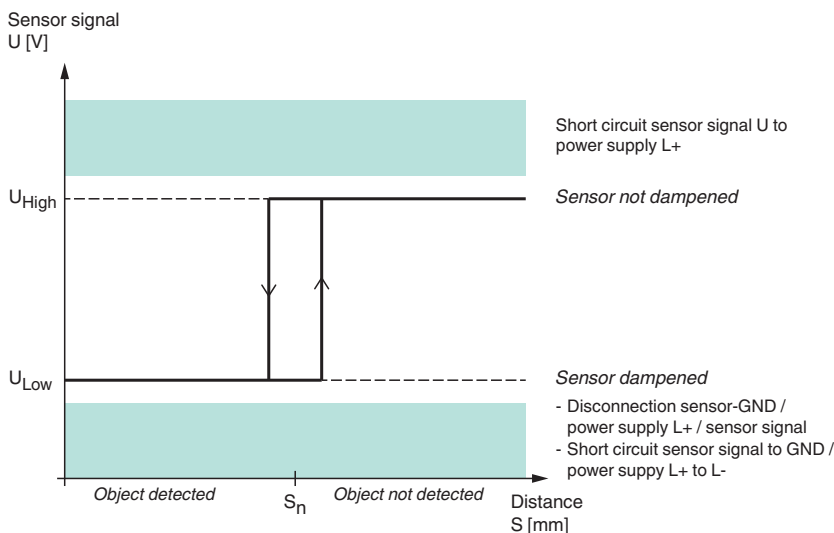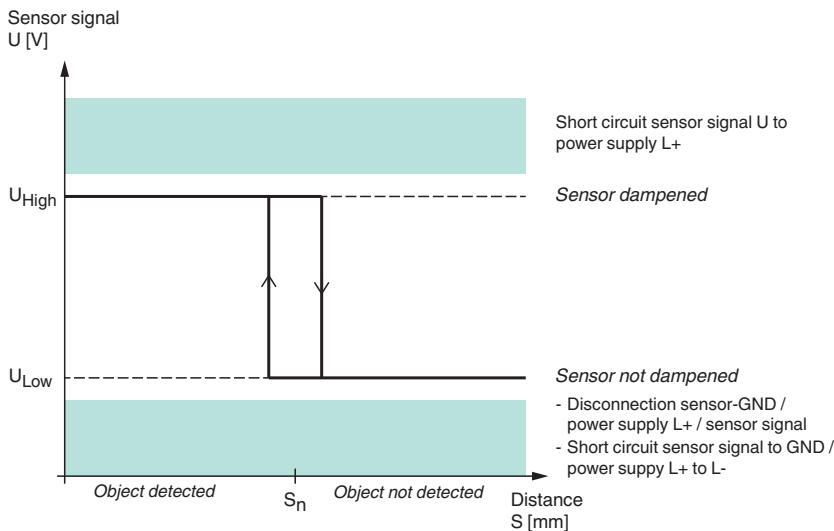

Release date: 2024-12-10 Date of issue: 2024-12-10 Filename: 70138043_eng.pdf