


## Inductive sensor


NBB0,8-4M25-E0-0,3M-V3



- Basic series
- 0.8 mm flush
- Cable with M8 plug

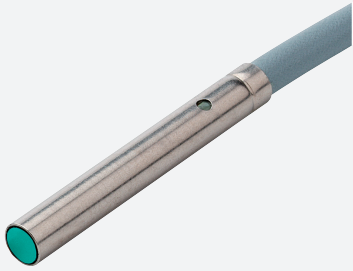

### Dimensions

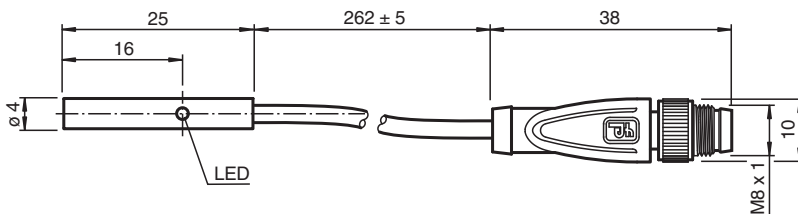

### Technical Data

| General specifications               |       |                                        |
|--------------------------------------|-------|----------------------------------------|
| Switching function                   |       | Normally open (NO)                     |
| Output type                          |       | NPN                                    |
| Rated operating distance             | $s_n$ | 0.8 mm                                 |
| Installation                         |       | flush                                  |
| Output polarity                      |       | DC                                     |
| Assured operating distance           | $s_a$ | 0 ... 0.648 mm                         |
| Reduction factor $r_{AI}$            |       | 0.45                                   |
| Reduction factor $r_{Cu}$            |       | 0.4                                    |
| Reduction factor $r_{304}$           |       | 0.85                                   |
| Output type                          |       | 3-wire                                 |
| Nominal ratings                      |       |                                        |
| Operating voltage                    | $U_B$ | 10 ... 30 V                            |
| Switching frequency                  | $f$   | 0 ... 3000 Hz                          |
| Hysteresis                           | $H$   | 5 ... 20 %                             |
| Reverse polarity protection          |       | reverse polarity protected             |
| Short-circuit protection             |       | pulsing                                |
| Voltage drop                         | $U_d$ | $\leq 3$ V                             |
| Operating current                    | $I_L$ | 0 ... 100 mA                           |
| Off-state current                    | $I_r$ | 0 ... 0.1 mA typ. 0.1 $\mu$ A at 25 °C |
| No-load supply current               | $I_0$ | $\leq 12$ mA                           |
| Switching state indicator            |       | LED, yellow                            |
| Functional safety related parameters |       |                                        |
| MTTF <sub>d</sub>                    |       | 2140 a                                 |

Release date: 2024-04-25 Date of issue: 2024-04-25 Filename: 224133\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

|                                                 |   |                                                              |
|-------------------------------------------------|---|--------------------------------------------------------------|
| Mission Time (T <sub>M</sub> )                  |   | 20 a                                                         |
| Diagnostic Coverage (DC)                        |   | 0 %                                                          |
| <b>Compliance with standards and directives</b> |   |                                                              |
| Standard conformity                             |   |                                                              |
| Standards                                       |   | EN IEC 60947-5-2                                             |
| <b>Approvals and certificates</b>               |   |                                                              |
| UL approval                                     |   | cULus Listed, General Purpose                                |
| CCC approval                                    |   | CCC approval / marking not required for products rated ≤36 V |
| <b>Ambient conditions</b>                       |   |                                                              |
| Ambient temperature                             |   | -25 ... 70 °C (-13 ... 158 °F)                               |
| <b>Mechanical specifications</b>                |   |                                                              |
| Connection type                                 |   | fixed cable with plug                                        |
| Housing material                                |   | Stainless steel 1.4305 / AISI 303                            |
| Sensing face                                    |   | PBT                                                          |
| Degree of protection                            |   | IP67                                                         |
| <b>Connector</b>                                |   |                                                              |
| Threading                                       |   | M8 x 1                                                       |
| Number of pins                                  |   | 3                                                            |
| <b>Cable</b>                                    |   |                                                              |
| Cable diameter                                  |   | 3 mm - 0.2 mm                                                |
| Bending radius                                  |   | > 12 x cable diameter                                        |
| Material                                        |   | PVC                                                          |
| Color                                           |   | grey                                                         |
| Number of cores                                 |   | 3                                                            |
| Core cross section                              |   | 0.14 mm <sup>2</sup>                                         |
| Length                                          | L | 0.3 m                                                        |
| <b>Dimensions</b>                               |   |                                                              |
| Length                                          |   | 25 mm                                                        |
| Diameter                                        |   | 4 mm                                                         |

Connection



Connection Assignment



Release date: 2024-04-25 Date of issue: 2024-04-25 Filename: 224133\_eng.pdf

## Connection Assignment

Wire colors in accordance with EN 60947-5-2

|   |    |         |
|---|----|---------|
| 1 | BN | (brown) |
| 3 | BU | (blue)  |
| 4 | BK | (black) |

## Mounting

