



Inductive analog sensor NBB8-30GM60-I3



- Inductive analog
- Output 0 mA ... 20 mA
- Flush mounting



Dimensions

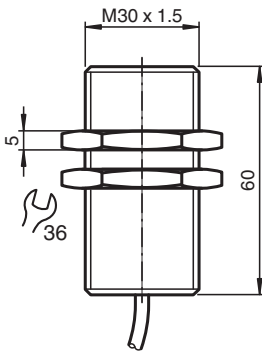

Technical Data

General specifications

Output type	Analog current output
Installation	flush
Output polarity	DC
Measurement range	3 ... 8 mm
Output type	3-wire

Nominal ratings

Operating voltage	U_B	15 ... 30 V DC
Repeat accuracy		0 ... 200 μ m
Recovery time		1 ... 10 ms typ. 5 ms
No-load supply current	I_0	≤ 12 mA

Analog output

Output type	0 ... 20 mA
Slope of output characteristic	4 mA / mm
Linearity error	$\leq \pm 5$ % of full-scale value
Load resistor	$\leq 500 \Omega$
Rate of current rise	
0 ... 20 mA	≤ 50 A/s
20 ... 0 mA	≤ 20 A/s
Temperature drift	$\leq \pm 0.15$ %/K of the measured value

Release date: 2024-05-28 Date of issue: 2024-06-08 Filename: 282837_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Residual ripple	± 125 µA
Compliance with standards and directives	
Standard conformity	
Standards	EN IEC 60947-5-2
Approvals and certificates	
UL approval	cULus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤36 V
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications	
Connection type	cable PVC , 2 m
Core cross section	0.75 mm²
Housing material	brass, nickel-plated
Sensing face	PBT
Degree of protection	IP67
Cable	
Cable diameter	6.4 mm ± 0.2 mm
Bending radius	> 10 x cable diameter
Dimensions	
Length	60 mm
Diameter	30 mm

Connection

