





Inductive ring sensor RJ15-N

- 15 mm inside diameter

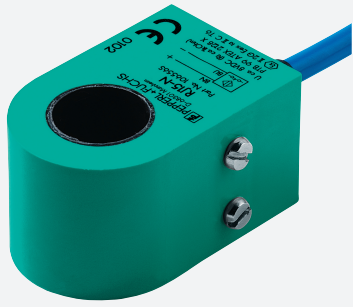

Dimensions

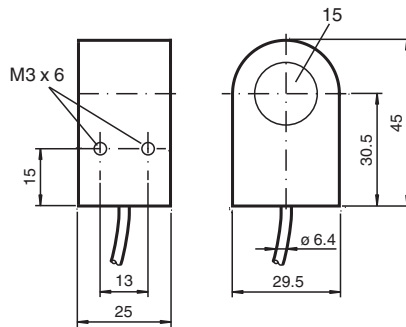

Technical Data

General specifications

Switching function	Normally closed (NC)	
Output type	NAMUR	
Inside diameter	15 mm	
Measuring cylinder		
Diameter	3 mm	
Length	4 mm	
Output type	2-wire	

Nominal ratings

Nominal voltage	U _o	8.2 V (R _i approx. 1 kΩ)
Operating voltage	U _B	5 ... 25 V
Switching frequency	f	0 ... 1500 Hz
Current consumption		

Measuring plate not detected	≥ 3 mA at nominal voltage
Measuring plate detected	≤ 1 mA at nominal voltage

Functional safety related parameters

MTTF _d	9340 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %

Compliance with standards and directives

Release date: 2024-05-28 Date of issue: 2024-06-02 Filename: 106556_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Standard conformity		
NAMUR		EN 60947-5-6:2000 IEC 60947-5-6:1999
Standards		EN IEC 60947-5-2
Approvals and certificates		
ATEX approval		
Equipment protection level Gb		PTB 99 ATEX 2128 X
FM approval		
Control drawing		116-0165
UL approval		cULus Listed, General Purpose
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications		
Connection type		cable
Housing material		PBT
Degree of protection		IP67
Cable		
Cable diameter		4.8 mm ± 0.2 mm
Bending radius		> 10 x cable diameter
Material		PVC
Core cross section		0.34 mm²
Length	L	2 m
Dimensions		
Height		45 mm
Width		29 mm
Length		25 mm
General information		
Use in the hazardous area		see instruction manuals

Connection



Release date: 2024-05-28 Date of issue: 2024-06-02 Filename: 106556_eng.pdf