


Thru-beam sensor

ARGOS-20M-SR1-4m

WITTSensoric




- Indicator LED on the front
- Protection against cross-talk with up to four devices
- Solid-state relay

Thru-beam sensor



Dimensions

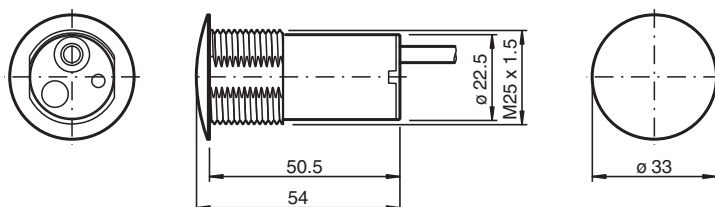

Technical Data

System components

Emitter	ARGOS-T
Receiver	ARGOS-R

General specifications

Effective detection range	0.5 ... 20 m
Threshold detection range	28 m
Number of protective field beams	1
Light source	IRED
Light type	modulated infrared light 950 nm
Marking	CE
Diameter of the light spot	approx. 7.3 m at a distance of 20 m
Opening angle	20 °
Optical face	frontal
Ambient light limit	100000 Lux

Indicators/operating means

Operation indicator	emitter LED green: power on
Function indicator	Receiver: LED red: lit when the light beam is interrupted
Stability alarm indicator	Receiver: flashing (approx. 4 Hz)

Electrical specifications

Operating voltage	U _B	10 ... 30 V AC 10 ... 40 V DC
Operating current	I _B	Emitter: ≤ 10 mA Receiver: ≤ 25 mA
Power consumption	P ₀	Emitter: ≤ 0.4 VA Receiver: ≤ 1 VA

Release date: 2024-07-09 Date of issue: 2024-07-11 Filename: 64316408_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Output		
Output type		solid-state relay , NO contact
Switching type		light-on
Switching voltage		DC: max. 48 V AC: max. 50 V
Switching current		DC: max. 0.5 A AC: max. 0.6 A
Energized/De-energized delay		typ. 100 ms
Response time		≤ 100 ms
Conformity		
Product standard		EN 61000-6-2, EN 61000-6-3
Ambient conditions		
Ambient temperature		-20 ... 75 °C (-4 ... 167 °F)
Storage temperature		-20 ... 75 °C (-4 ... 167 °F)
Mechanical specifications		
Degree of protection		IP67 according to EN 60529
Connection		Emitter: 0.25 mm ² , 3-wire 4 m fixed cable Receiver: 0.25 mm ² , 5-wire 4 m fixed cable
Material		
Housing		PC2805 RF
Mass		Emitter: 116 g Receiver: 131 g
Dimensions		
Length		55 mm
Diameter		22.5 mm

Release date: 2024-07-09 Date of issue: 2024-07-11 Filename: 64316408_eng.pdf