




## Background suppression sensor

MLV41-8-H-350-RT/59/70/136



- Rugged series in corrosion-resistant metal housing
- Reliable detection of all surfaces, independent of color and structure
- Minimal black-white difference
- Precision background suppression, adjustable
- Extremely high switching frequency
- Clear and functional display concept for the operating modes


Background suppression sensor in corrosion-resistant metal housing, 350 mm adjustable detection range, red light, 2 push-pull outputs, M9 plug



### Function

The unique and extremely popular design of the MLV41 series enables it to be mounted correctly in confined areas and offers all the functions that are normally only found on larger photoelectric sensors. The MLV41 series comes with a range of functions. For example, highly visible status LEDs on the front and back, resistance to ambient light, crosstalk protection and universally applicable output stages that permit every possible switching logic and polarity to be realized. The enhanced resistance to ambient light ensures reliable operation even where modern energy-saving lamps with electronic ballasts are in use. The same applies where multiple devices are present, i.e. the use of a number of sensors in the same vicinity causes no problems.

## Dimensions

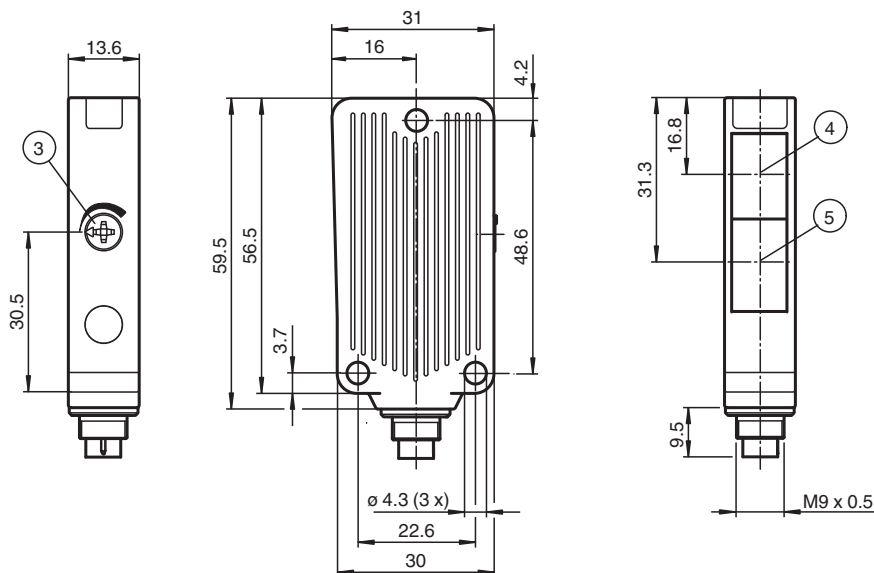

## Technical Data

### General specifications

|                                   |                                                  |
|-----------------------------------|--------------------------------------------------|
| Detection range                   | 50 ... 350 mm , adjustable                       |
| Detection range min.              | 10 ... 50 mm                                     |
| Detection range max.              | 30 ... 350 mm                                    |
| Adjustment range                  | 50 ... 350 mm                                    |
| Background suppression            | + 10 % of the upper limit of the detection range |
| Light source                      | LED                                              |
| Light type                        | modulated visible red light , 660 nm             |
| Black-white difference (6 %/90 %) | < 15 % at 350 mm                                 |
| Diameter of the light spot        | approx. 8 mm at 350 mm sensor range              |
| Opening angle                     | 1.5 °                                            |
| Ambient light limit               | 40000 Lux                                        |

### Functional safety related parameters

|                                |        |
|--------------------------------|--------|
| MTTF <sub>d</sub>              | 1260 a |
| Mission Time (T <sub>M</sub> ) | 20 a   |
| Diagnostic Coverage (DC)       | 0 %    |

### Indicators/operating means

|                     |                                                                                                                                                      |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operation indicator | LED green, statically lit Power on , Undervoltage indicator: Green LED, pulsing (approx. 0.8 Hz) , short-circuit : LED green flashing (approx. 4 Hz) |
| Function indicator  | 2 LEDs yellow<br>ON: object inside the scanning range<br>OFF: object outside the scanning range                                                      |
| Control elements    | Sensing range adjuster                                                                                                                               |

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 2441373\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

Technical Data

|                            |                |                                                                                              |
|----------------------------|----------------|----------------------------------------------------------------------------------------------|
| Electrical specifications  |                |                                                                                              |
| Operating voltage          | U <sub>B</sub> | 10 ... 30 V DC                                                                               |
| Ripple                     |                | max. 10 %                                                                                    |
| No-load supply current     | I <sub>0</sub> | max. 25 mA                                                                                   |
| Output                     |                |                                                                                              |
| Signal output              |                | 2 push-pull (4 in 1) outputs, complementary, short-circuit proof, reverse polarity protected |
| Switching voltage          |                | max. 30 V DC                                                                                 |
| Switching current          |                | max. 100 mA                                                                                  |
| Voltage drop               | U <sub>d</sub> | ≤ 2.5 V DC                                                                                   |
| Switching frequency        | f              | 1000 Hz                                                                                      |
| Response time              |                | 0.5 ms                                                                                       |
| Conformity                 |                |                                                                                              |
| Product standard           |                | EN 60947-5-2                                                                                 |
| Approvals and certificates |                |                                                                                              |
| UL approval                |                | cULus Listed 57M3 (Only in association with UL Class 2 power supply; Type 1 enclosure)       |
| CCC approval               |                | CCC approval / marking not required for products rated ≤36 V                                 |
| Ambient conditions         |                |                                                                                              |
| Ambient temperature        |                | -40 ... 60 °C (-40 ... 140 °F)                                                               |
| Storage temperature        |                | -40 ... 75 °C (-40 ... 167 °F)                                                               |
| Mechanical specifications  |                |                                                                                              |
| Housing width              |                | 31 mm                                                                                        |
| Housing height             |                | 56.5 mm                                                                                      |
| Housing depth              |                | 13.6 mm                                                                                      |
| Degree of protection       |                | IP67                                                                                         |
| Connection                 |                | with M9, 5-pin metal connector                                                               |
| Material                   |                |                                                                                              |
| Housing                    |                | Aluminum , Delta-Seal coated                                                                 |
| Optical face               |                | glass pane                                                                                   |
| Connector                  |                | metal                                                                                        |
| Mass                       |                | 50 g                                                                                         |

Connection Assignment

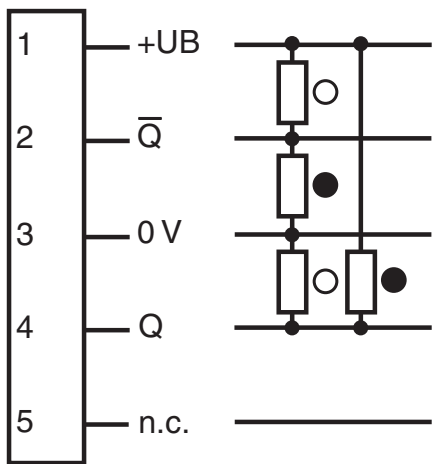


○ = Light on  
● = Dark on

Note:

In the case of replacements for MLV40, the differing pin assignment (EURO standard) must be taken into account

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 244373\_eng.pdf


Connection Assignment



Wire colors in accordance with EN 60947-5-2


|   |    |         |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue)  |
| 4 | BK | (black) |

Assembly

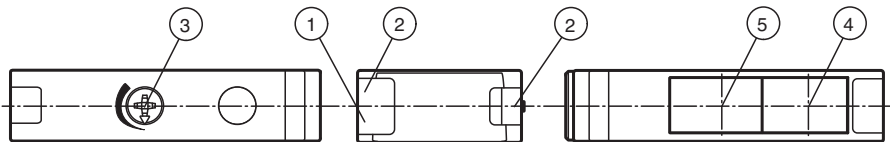


|   |                         |   |                          |   |                       |
|---|-------------------------|---|--------------------------|---|-----------------------|
| 1 | Operating display green | 3 | Sensing range adjuster   | 5 | Optical axis receiver |
| 2 | Function display yellow | 4 | Optical axis transmitter |   |                       |

Characteristic Curve

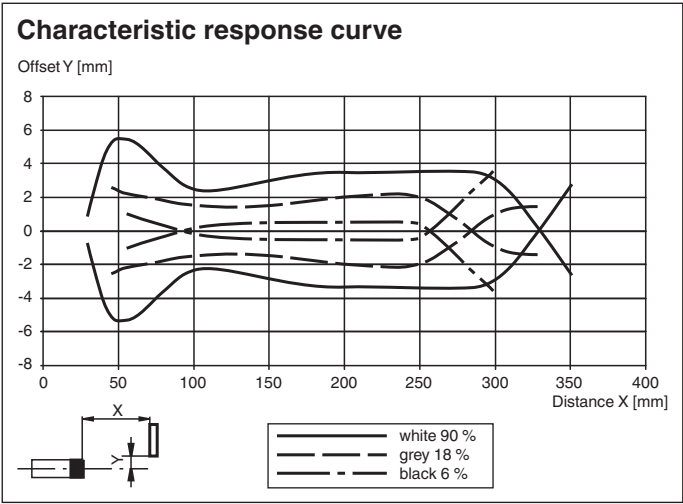

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 244373\_eng.pdf

Characteristic Curve

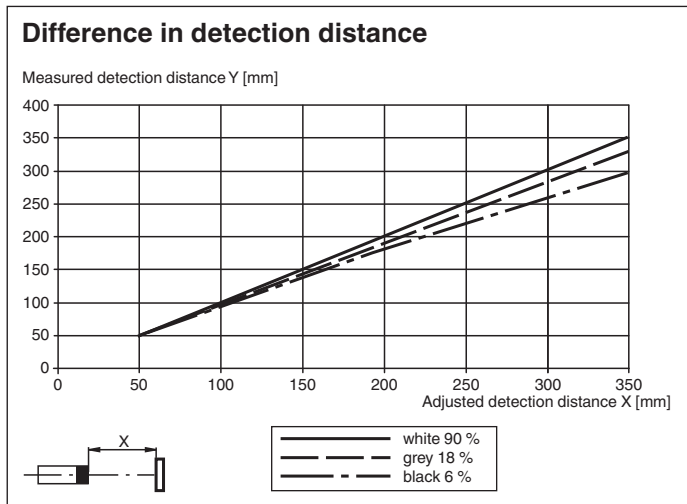

Accessories

|                                                                                   |               |                                                                |
|-----------------------------------------------------------------------------------|---------------|----------------------------------------------------------------|
|  | <b>OMH-09</b> | Mounting bracket for Sensors series MLV41 for M12 rod mounting |
|  | <b>OMH-40</b> | Mounting bracket                                               |