



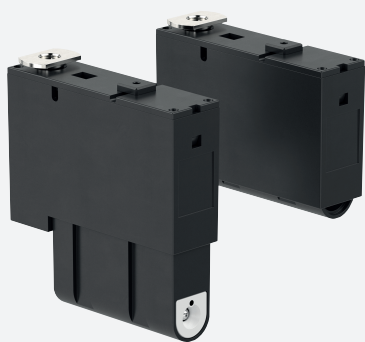

Safety thru-beam sensor NOCON-SEC-8M-OSE-1/10,5MoI




- Noncontact closing edge protection
- Compatible with all standard controllers
- Quicker door closing possible
- Low to no closing forces for sectional gates

Safety thru-beam sensor



Dimensions

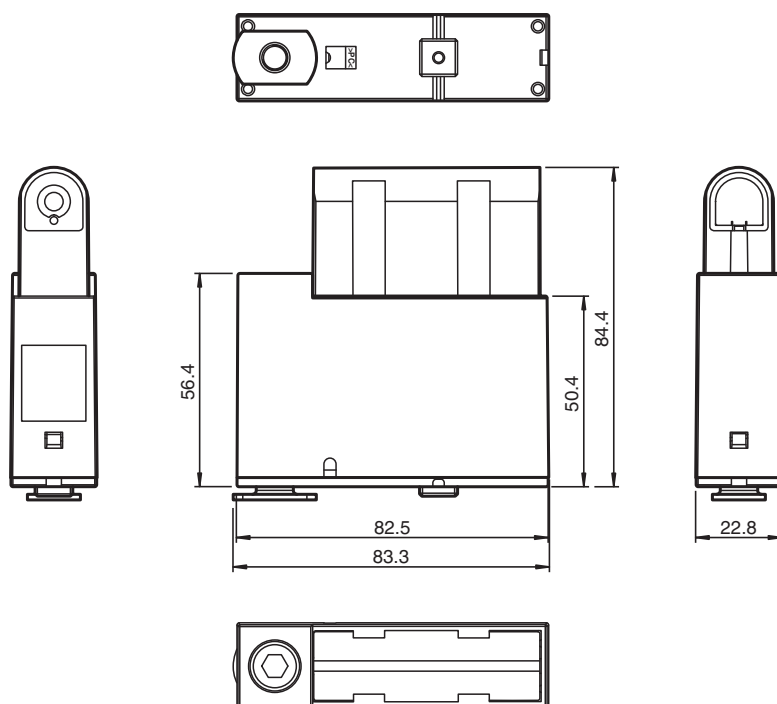

Technical Data

System components	
Emitter	NOCON-ROLL-T
Receiver	NOCON-ROLL-R
General specifications	
Effective detection range	1 ... 8 m
Threshold detection range	11 m
Number of protective field beams	1
Light source	IRED
Light type	modulated infrared light 950 nm
Safety type according to IEC/EN 61496	4

Release date: 2024-06-27 Date of issue: 2024-06-27 Filename: 64317970_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Marking		CE
Diameter of the light spot		approx. 1.2 m at a distance of 8 m
Opening angle		eff. $\pm 5^\circ$
Optical face		frontal
Ambient light limit		100000 Lux
Indicators/operating means		
Operation indicator		Receiver: LED green
Function indicator		emitter LED red: lit when the light beam is interrupted LED green: lights up when light beam is free
Stability alarm indicator		Emitter: flashing red/green
Electrical specifications		
Operating voltage	U _B	10 ... 24 V DC
Operating current	I _B	≤ 50 mA
Output		
Output type		OSE
Switching type		light-on
Signal output		900 Hz , transistor output loadable with max. 20 mA, short-circuit protected
Short-circuit-proof		yes
Energized/De-energized delay		typ. 100 ms
Response time		≤ 20 ms
Conformity		
Product standard		EN 61000-6-2, EN 61000-6-3 , EN 12978
Ambient conditions		
Ambient temperature		-25 ... 55 °C (-13 ... 131 °F)
Storage temperature		-25 ... 55 °C (-13 ... 131 °F)
Relative humidity		max. 95 %, not condensing
Mechanical specifications		
Degree of protection		IP67 according to EN 60529
Connection		PUR cable , 0.14 mm ² 3 conductor halogen-free
Material		
Housing		Plastic terluran® , RAL 1021 (yellow) (fiber-reinforced plastic)
Mass		per 120 g
Dimensions		
Height		82.4 mm
Width		38.6 mm
Depth		82.8 mm