




## Retroreflective sensor

OBR7500-R100-2EP1-IO-0,3M-V31



- Miniature design with versatile mounting options
- Extended temperature range  
-40 °C ... 60 °C
- High degree of protection IP69K
- IO-Link interface for service and process data

Retroreflective sensor with polarization filter



**IO-Link**

### Function


The R100 series miniature optical sensors are the first devices of their kind to offer an end-to-end solution in a small single standard design — from thru-beam sensor through to a distance measurement device. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The entire series enables sensors to communicate via IO-Link.

The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

The use of Multi Pixel Technology gives the standard sensors a high level of flexibility and enables them to adapt more effectively to their operating environment.

Dimensions

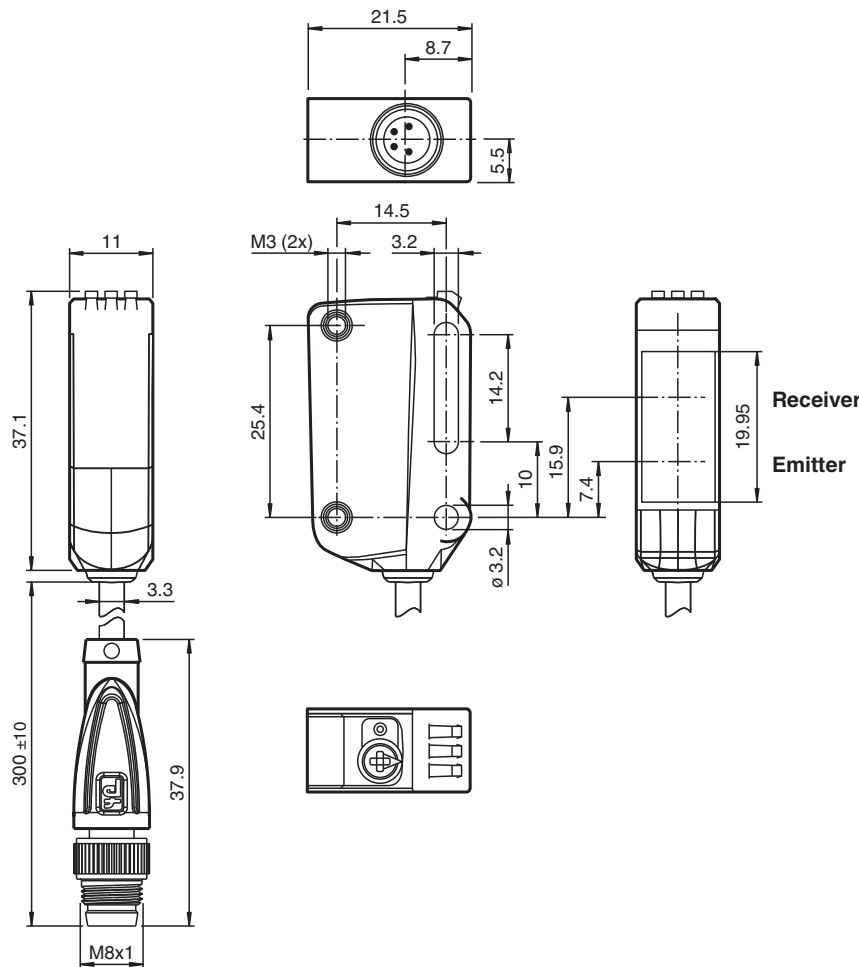

Technical Data


|                                             |                                                                                                                             |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>General specifications</b>               |                                                                                                                             |
| Effective detection range                   | 0 ... 7.5 m                                                                                                                 |
| Reflector distance                          | 0.03 ... 7.5 m                                                                                                              |
| Threshold detection range                   | 10 m                                                                                                                        |
| Reference target                            | H85-2 reflector                                                                                                             |
| Light source                                | LED                                                                                                                         |
| Light type                                  | modulated visible red light                                                                                                 |
| LED risk group labelling                    | exempt group                                                                                                                |
| Polarization filter                         | yes                                                                                                                         |
| Diameter of the light spot                  | approx. 65 mm at a distance of 1 m                                                                                          |
| Opening angle                               | 3.7 °                                                                                                                       |
| Ambient light limit                         | EN 60947-5-2                                                                                                                |
| <b>Functional safety related parameters</b> |                                                                                                                             |
| MTTF <sub>d</sub>                           | 724 a                                                                                                                       |
| Mission Time (T <sub>M</sub> )              | 20 a                                                                                                                        |
| Diagnostic Coverage (DC)                    | 0 %                                                                                                                         |
| <b>Indicators/operating means</b>           |                                                                                                                             |
| Operation indicator                         | LED green:<br>constantly on - power on<br>flashing (4Hz) - short circuit<br>flashing with short break (1 Hz) - IO-Link mode |

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 267075-100488\_eng.pdf

## Technical Data

|                                   |       |                                                                                                                                                                                                                                     |
|-----------------------------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Function indicator                |       | Yellow LED:<br>Permanently lit - light path clear<br>Permanently off - object detected<br>Flashing (4 Hz) - insufficient operating reserve                                                                                          |
| Control elements                  |       | Light-on/dark-on changeover switch                                                                                                                                                                                                  |
| Control elements                  |       | sensitivity adjustment                                                                                                                                                                                                              |
| Parameterization indicator        |       | IO link communication: green LED goes out briefly (1 Hz)                                                                                                                                                                            |
| <b>Electrical specifications</b>  |       |                                                                                                                                                                                                                                     |
| Operating voltage                 | $U_B$ | 10 ... 30 V DC                                                                                                                                                                                                                      |
| Ripple                            |       | max. 10 %                                                                                                                                                                                                                           |
| No-load supply current            | $I_0$ | < 25 mA at 24 V supply voltage                                                                                                                                                                                                      |
| Protection class                  |       | III                                                                                                                                                                                                                                 |
| <b>Interface</b>                  |       |                                                                                                                                                                                                                                     |
| Interface type                    |       | IO-Link ( via C/Q = pin 4 )                                                                                                                                                                                                         |
| IO-Link revision                  |       | 1.1                                                                                                                                                                                                                                 |
| Device ID                         |       | 0x110211 (1114641)                                                                                                                                                                                                                  |
| Transfer rate                     |       | COM2 (38.4 kBit/s)                                                                                                                                                                                                                  |
| Min. cycle time                   |       | 2.3 ms                                                                                                                                                                                                                              |
| Process data width                |       | Process data input 2 Bit<br>Process data output 2 Bit                                                                                                                                                                               |
| SIO mode support                  |       | yes                                                                                                                                                                                                                                 |
| Compatible master port type       |       | A                                                                                                                                                                                                                                   |
| <b>Output</b>                     |       |                                                                                                                                                                                                                                     |
| Switching type                    |       | The switching type of the sensor is adjustable. The default setting is:<br>C/Q - Pin4: NPN normally closed / light-on, PNP normally open / dark-on, IO-Link / Q - Pin2: NPN normally open / dark-on, PNP normally closed / light-on |
| Signal output                     |       | 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected                                                                                                                            |
| Switching voltage                 |       | max. 30 V DC                                                                                                                                                                                                                        |
| Switching current                 |       | max. 100 mA , resistive load                                                                                                                                                                                                        |
| Usage category                    |       | DC-12 and DC-13                                                                                                                                                                                                                     |
| Voltage drop                      | $U_d$ | ≤ 1.5 V DC                                                                                                                                                                                                                          |
| Switching frequency               | $f$   | 1000 Hz                                                                                                                                                                                                                             |
| Response time                     |       | 0.5 ms                                                                                                                                                                                                                              |
| <b>Conformity</b>                 |       |                                                                                                                                                                                                                                     |
| Communication interface           |       | IEC 61131-9                                                                                                                                                                                                                         |
| Product standard                  |       | EN 60947-5-2                                                                                                                                                                                                                        |
| <b>Approvals and certificates</b> |       |                                                                                                                                                                                                                                     |
| UL approval                       |       | E87056 , cULus Listed , class 2 power supply , type rating 1                                                                                                                                                                        |
| <b>Ambient conditions</b>         |       |                                                                                                                                                                                                                                     |
| Ambient temperature               |       | -40 ... 60 °C (-40 ... 140 °F) , fixed cable<br>-25 ... 60 °C (-13 ... 140 °F) , movable cable not appropriate for conveyor chains                                                                                                  |
| Storage temperature               |       | -40 ... 70 °C (-40 ... 158 °F)                                                                                                                                                                                                      |
| <b>Mechanical specifications</b>  |       |                                                                                                                                                                                                                                     |
| Housing width                     |       | 11 mm                                                                                                                                                                                                                               |
| Housing height                    |       | 37.1 mm                                                                                                                                                                                                                             |
| Housing depth                     |       | 21.5 mm                                                                                                                                                                                                                             |
| Degree of protection              |       | IP67 / IP69 / IP69K                                                                                                                                                                                                                 |
| Connection                        |       | fixed cable 300 mm with M8 x 1 male connector; 4-pin                                                                                                                                                                                |
| <b>Material</b>                   |       |                                                                                                                                                                                                                                     |
| Housing                           |       | PC (Polycarbonate)                                                                                                                                                                                                                  |
| Optical face                      |       | PMMA                                                                                                                                                                                                                                |
| Mass                              |       | approx. 15 g                                                                                                                                                                                                                        |
| Cable length                      |       | 0.3 m                                                                                                                                                                                                                               |

Connection




Connection Assignment



Wire colors in accordance with EN 60947-5-2

|   |    |         |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue)  |
| 4 | BK | (black) |

Assembly





Receiver  
Emitter

|   |                                    |
|---|------------------------------------|
| 1 | Light-on/Dark-on changeover switch |
| 2 | Sensitivity adjuster               |
| 3 | Operating indicator / dark on      |
| 4 | Signal indicator                   |
| 5 | Operating indicator / light on     |

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 267075-100488\_eng.pdf

## Characteristic Curve

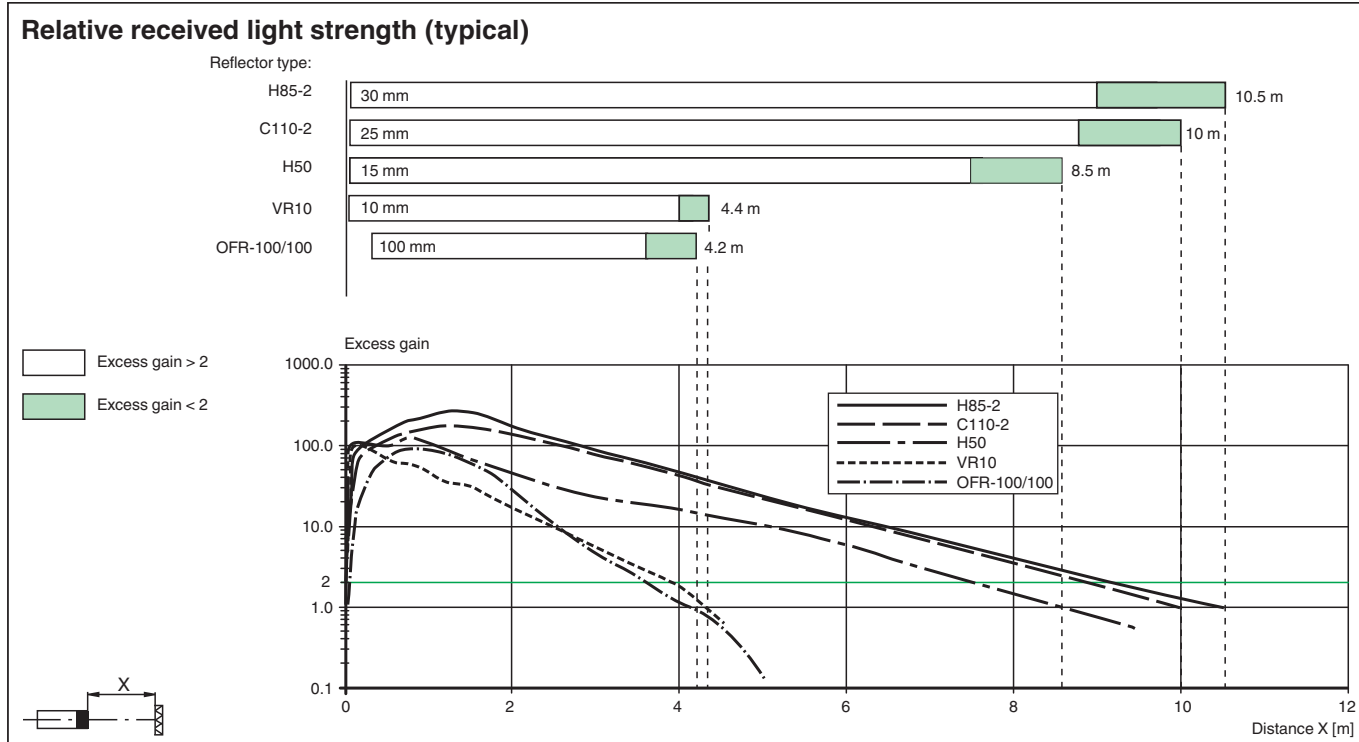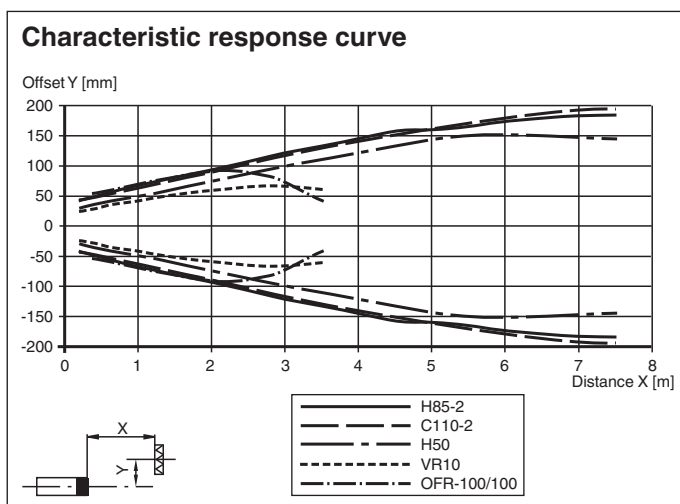

## Accessories

|                                                                                     |                  |                                                                           |
|-------------------------------------------------------------------------------------|------------------|---------------------------------------------------------------------------|
|  | <b>REF-H33</b>   | Reflector with screw fixing                                               |
|  | <b>REF-H85-2</b> | Reflector, rectangular 84.5 mm x 84.5 mm, mounting holes                  |
|  | <b>REF-H50</b>   | Reflector, rectangular 51 mm x 61 mm, mounting holes, fixing strap        |
|  | <b>REF-VR10</b>  | Reflector, rectangular 60 mm x 19 mm, mounting holes                      |
|  | <b>REF-MH82</b>  | Reflector with Micro-structure, rectangular 82 mm x 60 mm, mounting holes |

## Accessories


|                                                                                     |                             |                                                                                                              |
|-------------------------------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------|
|    | <b>REF-MH20</b>             | Reflector with Micro-structure, rectangular 32 mm x 20 mm, mounting holes                                    |
|    | <b>OFR-100/100</b>          | Reflective tape 100 mm x 100 mm                                                                              |
|    | <b>OMH-R10X-01</b>          | Mounting bracket                                                                                             |
|    | <b>OMH-R10X-02</b>          | Mounting bracket                                                                                             |
|    | <b>OMH-R10X-04</b>          | Mounting bracket                                                                                             |
|    | <b>OMH-R10X-10</b>          | Mounting bracket                                                                                             |
|    | <b>OMH-ML100-03</b>         | Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm                                                |
|    | <b>OMH-ML100-031</b>        | Mounting aid for round steel ø 10 ... 14 mm or sheet 1 mm ... 5 mm                                           |
|   | <b>ICE2-8IOL-G65L-V1D</b>   | EtherNet/IP IO-Link master with 8 inputs/outputs                                                             |
|  | <b>ICE3-8IOL-G65L-V1D</b>   | PROFINET IO IO-Link master with 8 inputs/outputs                                                             |
|  | <b>ICE1-8IOL-G30L-V1D</b>   | Ethernet IO-Link module with 8 inputs/outputs                                                                |
|  | <b>ICE1-8IOL-G60L-V1D</b>   | Ethernet IO-Link module with 8 inputs/outputs                                                                |
|  | <b>ICE2-8IOL-K45P-RJ45</b>  | EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, push-in connectors                               |
|  | <b>ICE2-8IOL-K45S-RJ45</b>  | EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, screw terminal                                   |
|  | <b>ICE3-8IOL-K45P-RJ45</b>  | PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, push-in terminals                                |
|  | <b>ICE3-8IOL-K45S-RJ45</b>  | PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, screw terminal                                   |
|  | <b>IO-Link-Master02-USB</b> | IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection |
|  | <b>V31-GM-2M-PUR</b>        | Female cordset single-ended M8 straight A-coded, 4-pin, PUR cable grey                                       |
|  | <b>V31-WM-2M-PUR</b>        | Female cordset single-ended M8 angled A-coded, 4-pin, PUR cable grey                                         |

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 267075-100488\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com
 **PEPPERL+FUCHS**

## Configuration



- 1 - Light-on / dark-on changeover switch
- 2 - Sensing range / sensitivity adjuster
- 3 - Operating indicator / dark on
- 4 - Signal indicator
- 5 - Operating indicator / light on

To unlock the adjustment functions turn the sensing range /sensitivity adjuster for more than 180 degrees.

### Sensing Range / Sensitivity

Turn sensing range / sensitivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range / sensitivity adjuster counter clockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

### Light-on / Dark-on Configuration

Press the light-on / dark-on changeover switch for more than 1 second (less than 4 seconds). The light-on / dark-on mode changes and the operating indicators are activated accordingly.

If you press the light-on / dark-on changeover switch for more than 4 seconds, the light-on /dark-on mode changes back to the original setting. On release of the light-on / dark-on changeover switch the current state is activated.

### Restore Factory Settings

Press the light-on / dark-on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light-on / dark-on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory default settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range / sensitivity adjustment, turn the sensing range /sensitivity adjuster for more than 180 degrees.