




# Activator BT37

- With one operating surface

Activator for F25 series

## Dimensions

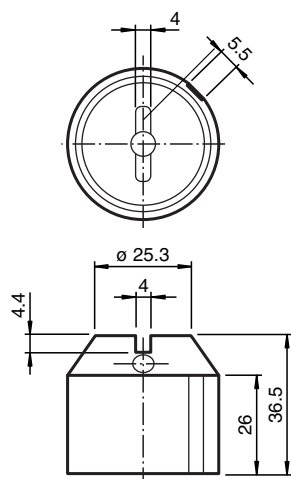

## Technical Data

|                                  |  |                                   |
|----------------------------------|--|-----------------------------------|
| <b>General specifications</b>    |  |                                   |
| Ring diameter                    |  |                                   |
| Spring ring height               |  |                                   |
| <b>Ambient conditions</b>        |  |                                   |
| Ambient temperature              |  | -25 ... 70 °C (-13 ... 158 °F)    |
| <b>Mechanical specifications</b> |  |                                   |
| Shaft diameter                   |  | ≤ 35 mm                           |
| Shaft height                     |  | 17 mm                             |
| Material                         |  |                                   |
| Housing                          |  | PS495F                            |
| Stopper cap                      |  | PBT (1 unit black)                |
| Mounting screw                   |  | Stainless steel 1.4305 / AISI 303 |
| Mass                             |  | 30 g                              |

Release date: 2020-03-31 Date of issue: 2020-06-29 Filename: 043088\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**