


Activator


BT43-RG-01

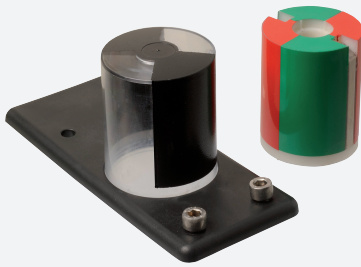

- High-visibility valve position display
- Suitable for right and left rotating drives
- Protection against contamination and damage
- Actuator to mount without tool

Activator for F25 series including protective housing and mounting plate

Dimensions

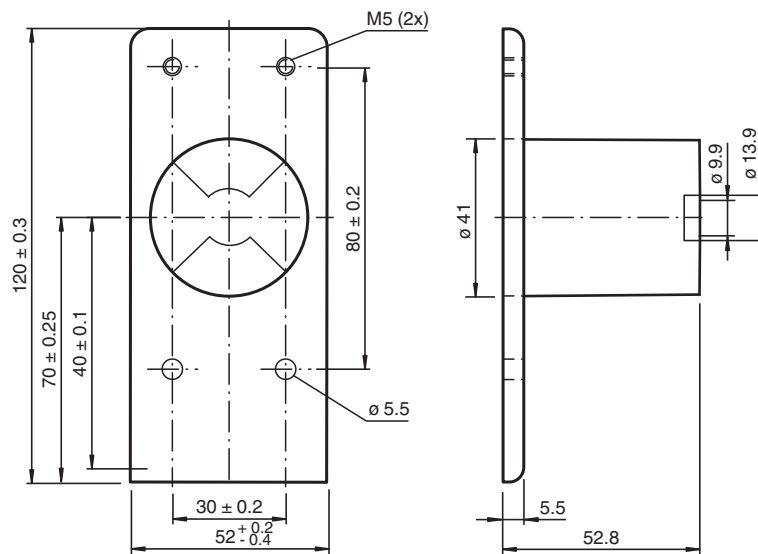

Release date: 2020-03-30 Date of issue: 2020-06-30 Filename: 264864_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

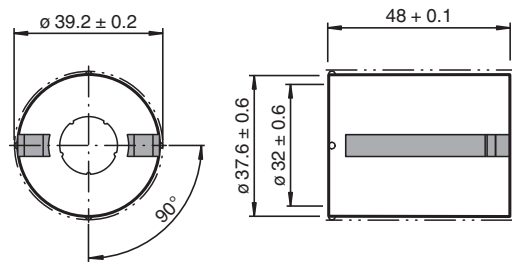

with Spacer element for 20 mm shaft height

with Spacer element for 30 mm shaft height

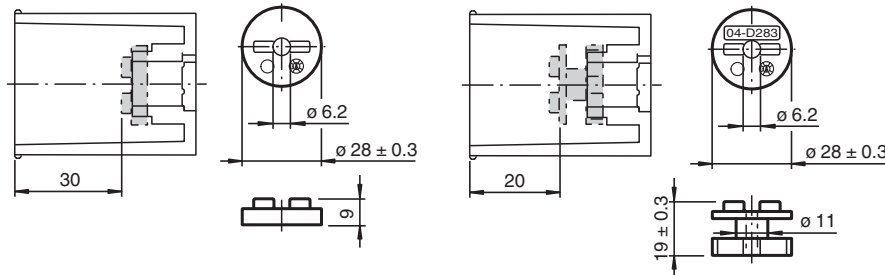

Technical Data

General specifications

Ring diameter	max. 32 mm
---------------	------------

Nominal ratings

Valve status indicator	red = CLOSED green = OPEN
------------------------	------------------------------

Compliance with standards and directives

Standard conformity	
Standards	VDI / VDE 3845

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
---------------------	--------------------------------

Mechanical specifications

Shaft diameter	≤ 31 mm
Shaft height	20 mm and 30 mm
Mounting hole pattern	30 x 80 mm
Material	
Housing	PC
Actuator	PBT
Spacer element	PP
Mounting screw	Stainless steel 1.4305 / AISI 303 , 2 cylinder head screws (Mounting plate)
Activation target	Stainless steel 1.4305 / AISI 303 (integrated)
Mass	107 g

General information

Scope of delivery	1 Activator for F25 series 1 Spacer element for 20 mm shaft height 1 Spacer element for 30 mm shaft height 1 Protective cover 1 Mounting plate with 2 cylinder head screws M5 X 13 2 cylinder head screws M5x30 for F25 mounting 2 cylinder head screws M5x45 for F25K mounting
-------------------	---