


## Mounting aid


### CM-30

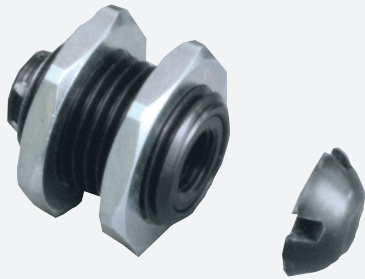

- Cushioned Mounting Bracket
- For use with 30 mm diameter sensors
- Maximum overtravel 14.5 mm

Mounting aid

## Dimensions

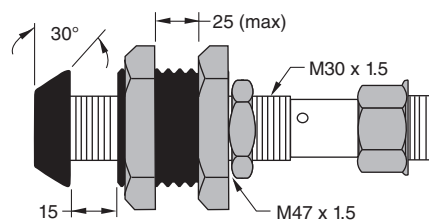

## Technical Data

### General specifications

|                 |       |
|-----------------|-------|
| Inside diameter | 30 mm |
|-----------------|-------|

### Mechanical specifications

|          |                                                                                                     |
|----------|-----------------------------------------------------------------------------------------------------|
| Material | Sleeves: anodized aluminum<br>Jam nuts: nickel-plated metal<br>End cap: fiberglass reinforced nylon |
|----------|-----------------------------------------------------------------------------------------------------|

## Function

The cushioned mounting bracket provides protection against accidental target contact for embeddable standard inductive sensors.