


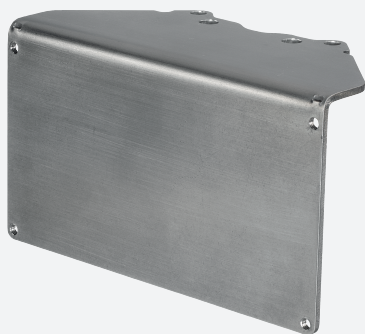


Mounting bracket MHV-WS-F406-F05-M5

- Simple mounting
- All-in-one stainless steel solution
- Mounting on manual valve from the lateral or from behind possible

Mounting angle for WILSEN.valve devices for attachment to adapter plate and mounting sets of the MHV-BT* series for manually operated valves

Dimensions

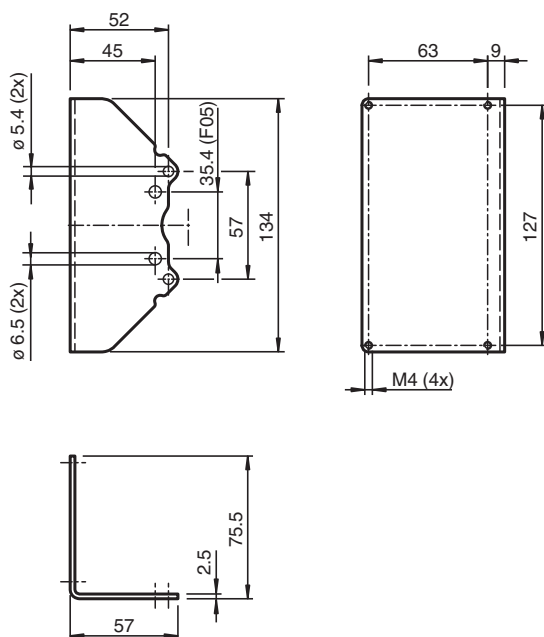

Technical Data

General specifications

Suitable components

WILSEN.valve
Adapter plate for dual sensors -F25/-F31 series
Adapter plate for dual sensors F31K/-F31K2 series

Standard conformity

Standards

DIN EN ISO 5211 / DIN 3337

Mechanical specifications

Material

stainless steel 1.4301 / AISI 304

Mass

295 g

Dimensions

Height

75.5 mm

Width

134 mm

Release date: 2024-08-28 Date of issue: 2024-08-28 Filename: 70170600_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Length	57 mm
General information	
Note	For the mounting bracket, we offer other suitable accessories such as adapter plates and mounting sets for manual operated valves.
Scope of delivery	For mounting of the mounting bracket to the adapter plate: 2 allen head screws M5 x 8 (for mounting from behind) 2 allen head screws M6 x 10 (for lateral mounting)

Release date: 2024-08-28 Date of issue: 2024-08-28 Filename: 70170600_eng.pdf