


Deviation mirror

SLA-1-M


- Deflecting mirror for single-beam deflection of the protection beam of safety light beams in the SL and SLA series



Deviation mirror



Dimensions

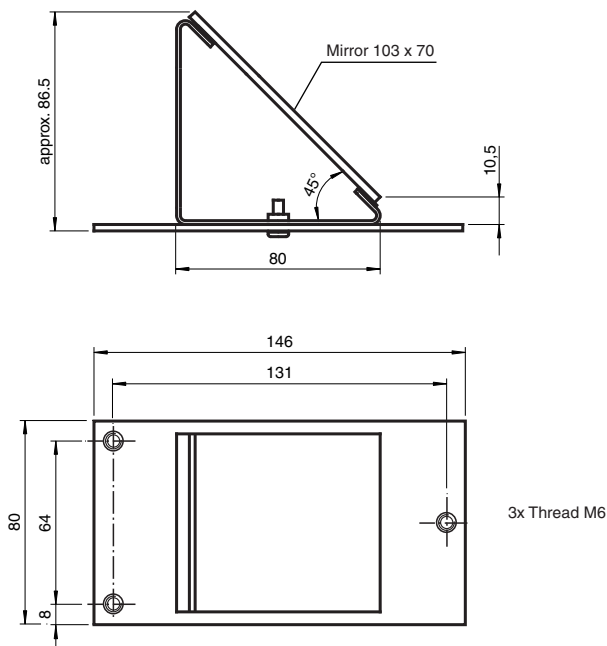

Technical Data

Functional safety related parameters

Safety Integrity Level (SIL)	SIL 3
Performance level (PL)	PL e
Category	Cat. 4
Mission Time (T_M)	20 a
PFH_d	4.4 E-10

Ambient conditions

Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
---------------------	--------------------------------

Mechanical specifications

Material	
----------	--

Release date: 2020-03-23 Date of issue: 2020-10-06 Filename: 406214_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Housing	Metal sheet (steel), black-coated
Suitable series	
Safety Series	SLA

Release date: 2020-03-23 Date of issue: 2020-10-06 Filename: 406214_eng.pdf