

## Adapter plate

### Adaptor plate new VariKont

- Simple and fast mounting
- Suitable for VariKont sensors


## Adapter plate

### Function

When exchanging an NJ40-U... for an NBN40-U..., the detection range changes because of the different head dimensions. By using the adapter plate, all offset dimensions (side, height, and depth offset) are compensated for. Sensor mounting is performed laterally, offset to the center of the adapter plate on both notched tabs.

If insufficient space is available at the side in the area of the base, both notched tabs of the adapter plate can be broken off. During subsequent mounting of an NBN40-U... centered on the adapter plate, the height and depth offset (Y and Z) are compensated for – but not, however, the side offset X.

### Dimensions

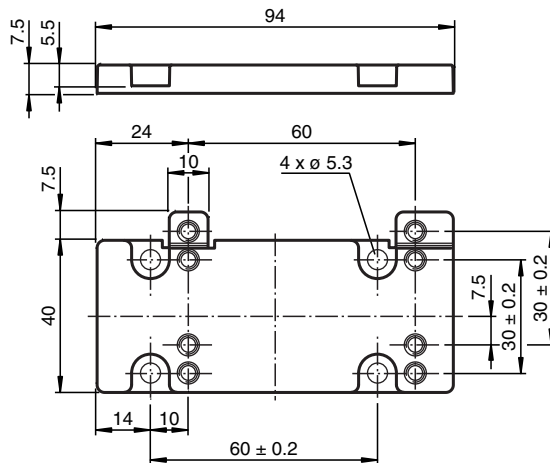

### Technical Data

#### Approvals and certificates

CCC approval CCC approval / marking not required for products rated  $\leq 36$  V

#### Ambient conditions

Ambient temperature  $-25 \dots 85$  °C ( $-13 \dots 185$  °F)

#### Mechanical specifications

Housing material PA 6 Grivory GVN-35H

Material

Mounting screw 4 units, screw M5 X 20 DIN912 A2

## Mounting

