


BCE8-QP08-AN6X

Capacitive Sensor – With Potentiometer

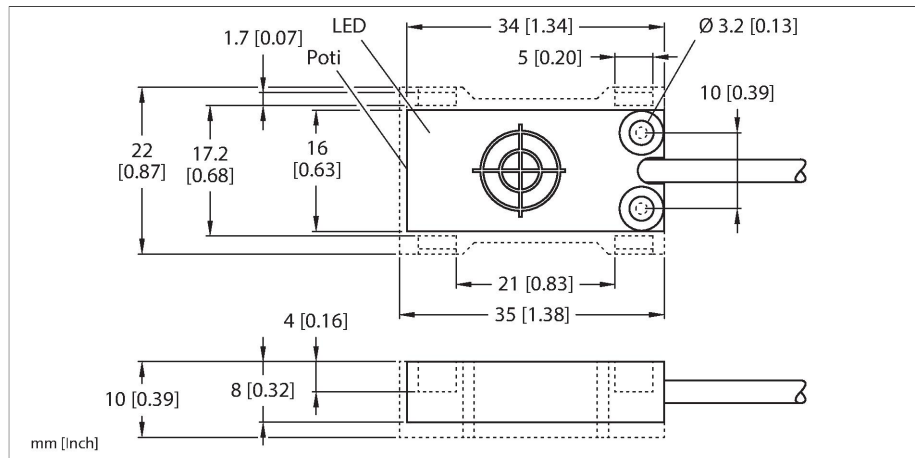


Technical data

Type	BCE8-QP08-AN6X
ID	100016729
Rated switching distance (flush)	8 mm
Rated switching distance (non-flush)	8 mm
Secured operating distance	$\leq (0.72 \times S_n)$ mm
Hysteresis	1...15 %
Repeat accuracy	≤ 5 % of full scale
Ambient temperature	-30...+70 °C
Electrical data	
Operating voltage U_B	12...30 VDC
Ripple U_{ss}	≤ 10 % U_{Bmax}
DC rated operating current I_o	≤ 50 mA
No-load current	≤ 10 mA
Residual current	≤ 0.1 mA
Switching frequency	0.1 kHz
Isolation test voltage	0.075 kV
Output function	3-wire, NO contact, NPN
Short-circuit protection	yes/Cyclic
Voltage drop at I_o	≤ 1.5 V
Wire break/reverse polarity protection	yes/Complete
Tests/approvals	
Approvals	UL
UL registration number	E210608
Mechanical data	
Design	Rectangular, QP08
Dimensions	34 x 16 x 8 mm
Housing material	Plastic, PP

Features

- Rectangular, height 8mm
- Plastic, PP
- Mounting frame, PUR
- Fine adjustment via potentiometer
- DC 3-wire, 12...30 VDC
- NO contact, NPN output
- Cable connection

Wiring diagram



Functional principle

Capacitive proximity switches are designed for non-contact and wear-free detection of electrically conductive as well as non-conductive metal objects.

Technical data

Active area material	PP
Electrical connection	Cable
Cable quality	Ø 3 mm, LifYY-11Y, PUR, 2 m
Core cross-section	3 x 0.14 mm ²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP65
MTTF	680 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	Green
Switching state	LED, Red
Included in delivery	Mounting frame, screwdriver