

REI-10S6S-2B1024-H1181  
Incremental Encoder  
Industrial Line



Features

- Synchro flange, Ø 58 mm
- Solid shaft, Ø 6 mm × 10 mm
- Optical measuring principle
- Shaft material: stainless steel
- Protection class IP67 on housing and shaft side
- -40...+85 °C
- Max. 6000 rpm (continuous operation 3000 rpm)
- 10...30 VDC
- Push-pull/HTL invertible
- Pulse frequency max. 300 kHz
- M12 × 1 male connector, 8-pin
- 1024 pulses per revolution

Technical data

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Type                                   | REI-10S6S-2B1024-H1181                  |
| ID                                     | 100010291                               |
| Measuring principle                    | Optical                                 |
| General data                           |                                         |
| Max. Rotational Speed                  | 6000 rpm                                |
| Moment of inertia of the rotor         | 1.8 × 10 <sup>-5</sup> kgm <sup>2</sup> |
| Starting torque                        | < 0.05 Nm                               |
| Output type                            | Incremental                             |
| Resolution incremental                 | 1024 ppr                                |
| Electrical data                        |                                         |
| Operating voltage U <sub>B</sub>       | 10...30 VDC                             |
| No-load current                        | ≤ 100 mA                                |
| Output current                         | ≤ 30 mA                                 |
| Short-circuit protection               | yes                                     |
| Wire break/reverse polarity protection | yes                                     |
| Pulse frequency max.                   | 300 kHz                                 |
| Signal level high                      | min. U <sub>B</sub> - 1 V               |
| Signal level low                       | max. 0.5 V                              |
| Output function                        | Push-Pull/HTL, invertable               |
| Mechanical data                        |                                         |
| Flange type                            | Synchro flange                          |
| Flange diameter                        | Ø 58 mm                                 |
| Shaft Type                             | Solid shaft                             |
| Shaft diameter D (mm)                  | 6                                       |
| Shaft Length L [mm]                    | 10                                      |
| Shaft material                         | Stainless steel                         |











Wiring diagram



## Technical data

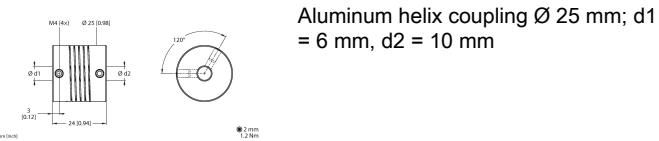
|                                     |                                     |
|-------------------------------------|-------------------------------------|
| Housing material                    | Die-cast zinc                       |
| Electrical connection               | Connector, M12 × 1                  |
|                                     | 8-pin                               |
| Axial shaft load                    | 40 N                                |
| Radial shaft load                   | 80 N                                |
| Environmental conditions            |                                     |
| Ambient temperature                 | -40...+85 °C                        |
| Vibration resistance (EN 60068-2-6) | 300 m/s <sup>2</sup> , 10...2000 Hz |
| Shock resistance (EN 60068-2-27)    | 3000 m/s <sup>2</sup> , 6 ms        |
| Protection class                    | IP67                                |
| Protection class shaft              | IP67                                |

## Accessories

|                  |           |                                                                                                                                                                  |                  |           |                                                                                                                                                                  |
|------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RCS-15-08-06     | 1545361   | <p>Bellows coupling, outer diameter: 15 mm, bore diameter: 8 mm/6 mm</p>      | RCS-15-06-04     | 1545363   | <p>Bellows coupling, outer diameter: 15 mm, bore diameter: 6 mm/4 mm</p>     |
| RA-BC-20-06-06   | 100048777 | <p>Bellows coupling with aluminum hub<br/>Ø 20 mm; d1 = 6 mm, d2 = 6 mm</p>   | RA-BC-20-06-08   | 100048778 | <p>Bellows coupling with aluminum hub<br/>Ø 20 mm; d1 = 6 mm, d2 = 8 mm</p>  |
| RA-BC-20-06-10   | 100048779 | <p>Bellows coupling with aluminum hub<br/>Ø 20 mm; d1 = 6 mm, d2 = 10 mm</p>  | RA-BC-E-20-06-06 | 100048785 | <p>Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 6 mm</p>        |
| RA-BC-E-20-06-10 | 100048786 | <p>Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 10 mm</p>        | RA-SDC-30-06-10  | 100048791 | <p>Spring disc coupling Ø 30 mm; d1 = 6 mm, d2 = 10 mm</p>                   |
| RA-SDC-30-06-06  | 100048790 | <p>Spring disc coupling Ø 30 mm; d1 = 6 mm, d2 = 6 mm</p>                     | RA-HC-25-06-06   | 100048794 | <p>Aluminum helix coupling Ø 25 mm; d1 = 6 mm, d2 = 6 mm</p>                 |

RA-HC-25-06-10

100048795



Accessories

| Dimension drawing  | Type | ID      |                                                                                                                         |
|--------------------|------|---------|-------------------------------------------------------------------------------------------------------------------------|
| <p>RKC8T-2/TXL</p> |      | 6625142 | Connection cable, M12 female connector, straight, 8-pin, cable length: 2 m, jacket material: PUR, black; cULus approval |
| <p>WKC8T-2/TXL</p> |      | 6625145 | Connection cable, M12 female connector, angled, 8-pin, cable length: 2 m, jacket material: PUR, black; cULus approval   |