


REM-E-121T6C-9F32B-H1151

Absolute Rotary Encoder - Multiturn

Efficiency Line

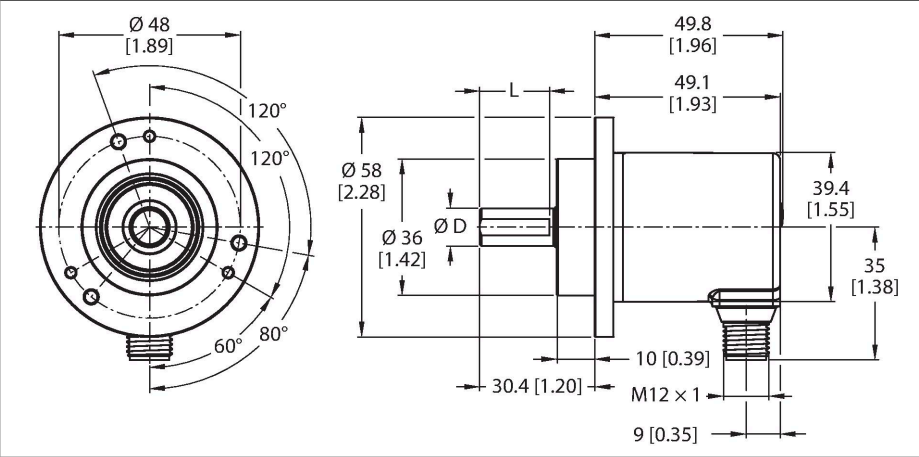

Technical data

Type	REM-E-121T6C-9F32B-H1151
ID	100023363
Measuring principle	Magnetic
General data	
Max. Rotational Speed	4000 rpm
Repetition accuracy	± 0.2 ° At 25 °C
Absolute accuracy	± 1 ° At 25 °C
Output type	Absolute multiturn
Electrical data	
Operating voltage U _B	10...30 VDC
No-load current	≤ 80 mA
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Communication protocol	SAE J1939
Interface	SAE J1939
Mechanical data	
Flange type	Clamping flange
Flange diameter	Ø 58 mm
Shaft Type	Solid shaft
Shaft diameter D (mm)	6
Shaft Length L [mm]	12.5
Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
	M12, 5-pin
Axial shaft load	40 N

Features

- Clamping flange, Ø 58 mm
- Solid shaft, Ø 6 mm × 12.5 mm
- Magnetic measuring principle
- Shaft material: stainless steel
- Protection class IP64 on housing and shaft side
- -20...+70 °C
- Max. 4000 rpm (continuous operation 2000 rpm)
- Energy harvesting technology
- 10...30 VDC
- SAE J1939
- M12 × 1 male connector, 5-pin
- Singleturn resolution 14 bit scalable, default 14 bit
- Multiturn resolution scalable up to 29 bit over total resolution, default 18 bit
- Total resolution 32 bit scalable, default: 32 bit

Wiring diagram

