

RES-184S10C-9D14B-H1151
Absolute Rotary Encoder - Singleturn
Industrial Line



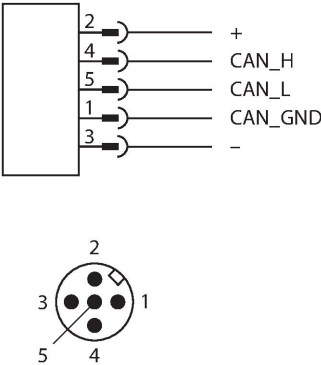
Technical data

Type	RES-184S10C-9D14B-H1151
ID	100046544
Measuring principle	Magnetic
General data	
Max. Rotational Speed	4000 rpm
Starting torque	< 0.01 Nm
Measuring range	0...360 °
Absolute accuracy	± 1 ° At 25 °C
Output type	Absolute singleturn
Resolution singleturn	14 Bit
Electrical data	
Operating voltage U _B	10...30 VDC
No-load current	≤ 90 mA
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Communication protocol	CANopen
Interface	CAN High-Speed in accordance with ISO 11898, basic and full CAN, CAN specification 2.0 B
Node ID	1...127 mit Software konfigurierbar; Werkseinstellung: 63
Baud rate	10...1000 kbps can be configured using software, factory settings 125 kbps
Mechanical data	
Flange type	Clamping flange
Flange diameter	Ø 36 mm
Shaft Type	Solid shaft

Features

- Clamping flange, Ø 36 mm
- Solid shaft, Ø 10 mm × 20 mm
- Magnetic measuring principle
- Shaft material: stainless steel
- Protection class IP67 on housing and shaft side
- -40...+85 °C
- Max. 4000 rpm (continuous operation 2000 rpm)
- 10...30 VDC
- CANopen
- M12 × 1 male connector, 5-pin
- 360° resolved in 14 bit (16384 positions)












Wiring diagram



Technical data

Shaft diameter D (mm)	10
Shaft Length L [mm]	20
Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
Axial shaft load	20 N
Radial shaft load	40 N
Environmental conditions	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	300 m/s ² , 10...2000 Hz
Shock resistance (EN 60068-2-27)	2500 m/s ² , 6 ms
Protection class	IP67
Protection class shaft	IP67

Accessories

RA-BC-20-06-10 	100048779 Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 10 mm
RA-BC-20-08-10 	100048781 Bellows coupling with aluminum hub Ø 20 mm; d1 = 8 mm, d2 = 10 mm
RA-BC-20-10-10 	100048782 Bellows coupling with aluminum hub Ø 20 mm; d1 = 10 mm, d2 = 10 mm
RA-BC-20-10-12 	100048783 Bellows coupling with aluminum hub Ø 20 mm; d1 = 10 mm, d2 = 12 mm
RA-BC-E-20-06-10 	100048786 Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 10 mm
RA-BC-E-20-10-10 	100048787 Stainless steel bellows coupling Ø 20 mm; d1 = 10 mm, d2 = 10 mm
RA-BC-E-20-10-12 	100048788 Stainless steel bellows coupling Ø 20 mm; d1 = 10 mm, d2 = 12 mm
RA-BC-E-20-10-12 	100048793 Spring disc coupling Ø 30 mm; d1 = 10 mm, d2 = 12 mm
RA-SDC-30-10-10 	100048792 Spring disc coupling Ø 30 mm; d1 = 10 mm, d2 = 10 mm
RA-SDC-30-10-12 	100048796 Aluminum helix coupling Ø 25 mm; d1 = 10 mm, d2 = 10 mm
RA-HC-25-10-10 	

RA-HC-25-10-12

100048797

Aluminum helix coupling Ø 25 mm; d1
= 10 mm, d2 = 12 mm

