


# BI5U-MT18-AP6X-H1141

## Inductive Sensor




### Technical data

|                                           |                               |
|-------------------------------------------|-------------------------------|
| Type                                      | BI5U-MT18-AP6X-H1141          |
| ID                                        | 1635240                       |
| General data                              |                               |
| Rated switching distance                  | 5 mm                          |
| Mounting conditions                       | Flush                         |
| Secured operating distance                | ≤ (0.81 × Sn) mm              |
| Repeat accuracy                           | ≤ 2 % of full scale           |
| Temperature drift                         | ≤ ±10 %                       |
|                                           | ≤ ± 15 %, ≤ -25 °C v ≥ +70 °C |
| Hysteresis                                | 3...15 %                      |
| Electrical data                           |                               |
| Operating voltage U <sub>B</sub>          | 10...30 VDC                   |
| Ripple U <sub>ss</sub>                    | ≤ 10 % U <sub>Bmax</sub>      |
| DC rated operating current I <sub>e</sub> | ≤ 200 mA                      |
| No-load current                           | ≤ 25 mA                       |
| Residual current                          | ≤ 0.1 mA                      |
| Isolation test voltage                    | 0.5 kV                        |
| Short-circuit protection                  | yes/Cyclic                    |
| Voltage drop at I <sub>e</sub>            | ≤ 1.8 V                       |
| Wire break/reverse polarity protection    | yes/Complete                  |
| Output function                           | 3-wire, NO contact, PNP       |
| DC field stability                        | 300 mT                        |
| AC field stability                        | 300 mT <sub>ss</sub>          |
| Insulation class                          | □                             |
| Switching frequency                       | 1.5 kHz                       |
| Mechanical data                           |                               |
| Design                                    | Threaded barrel, M18 x 1      |

### Features

- Threaded barrel, M18 x 1
- Brass, PTFE-coated
- Factor 1 for all metals
- Protection class IP68
- Resistant to magnetic fields
- Extended temperature range
- High switching frequency
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- M12 x 1 male connector

### Wiring diagram







### Functional principle

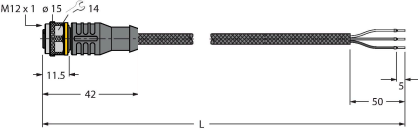
Inductive sensors are designed for wear-free and contactless detection of metal objects. Iprox Factor 1 sensors have significant advantages due to their patented ferrite-coreless multi-coil system. They detect all metals at the same large switching distance and are resistant to magnetic fields.



Accessories

|                                                                                    |         |                                                                                                                                                                                              |
|------------------------------------------------------------------------------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BST-18B                                                                            | 6947214 | Mounting clamp for threaded barrel sensors, with dead-stop; material: PA6                                                                                                                    |
|   |         |                                                                                                                                                                                              |
| QMT-18                                                                             | 6945104 | Quick-mount bracket with dead-stop; material: brass, PTFE-coated; Male thread M24 × 1.5. Note: The switching distance of the proximity switches may change when using quick-mount brackets.  |
|  |         |                                                                                                                                                                                              |
| QM-18                                                                              | 6945102 | Quick-mount bracket with dead-stop; material: Chrome-plated brass. Male thread M24 × 1.5. Note: The switching distance of the proximity switches may change when using quick-mount brackets. |
|   |         |                                                                                                                                                                                              |
| BSS-18                                                                             | 6901320 | Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene                                                                                                               |
|  |         |                                                                                                                                                                                              |

Accessories

| Dimension drawing                                                                   | Type            | ID      |                                                                                                                                                         |
|-------------------------------------------------------------------------------------|-----------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | RKC4T-2/TXL1001 | 6630249 | Connection cable, M12 female connector, straight, 3-pin, cable length: 2 m, protective jacket material: aramid fibers, yellow; temperature peak: 200 °C |