


LX15EQ

Photoelectric Sensor – Opposed Mode Sensor (Emitter)

Emitter

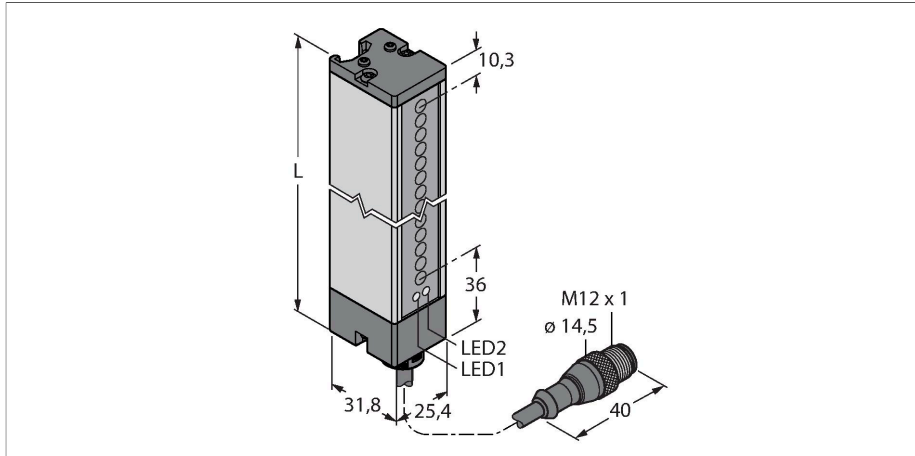

Technical data


Type	LX15EQ
ID	3071796
Optical data	
Function	Light screen
Operating mode	Emitter
Light type	IR
Wavelength	880 nm
Optical resolution	9.5 mm
Range	150...2000 mm
Scan field	371 mm
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U _{ss}
No-load current	≤ 100 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Response time typical	< 4 ms
Mechanical data	
Design	Rectangular, LX
Dimensions	31.8 x 25.4 x 418.2 mm
Housing material	Metal, AL, Grey
Lens	plastic, Acrylic
Electrical connection	Cable with connector, M12 x 1, 0.15 m, PVC
Number of cores	5
Core cross-section	0.5 mm ²



Features

- Cable with male end M12 x 1, 5-pin, 0.15 m
- Protection class IP65
- Scan field 371 mm
- Minimum target size 9.5 mm
- Operating voltage: 10 ... 30 VDC
- Programmable connection for reduced sensing range
- 2 slot nuts including M5 screws for wall mounting included in the scope of delivery

Wiring diagram



Functional principle

Light screens are used to monitor large areas. They consist of an emitter and a receiver. Switching light screens with scanning heights of up to 76 mm (LX3...) and up to 914 mm (Lx36...) are available. The crossed beams of the LX light screen enable small objects and/or objects that are not standard shapes to be reliably detected.

