


QS18VP6FPQ5

Photoelectric Sensor – Photoelectric Sensor for Plastic Fibers

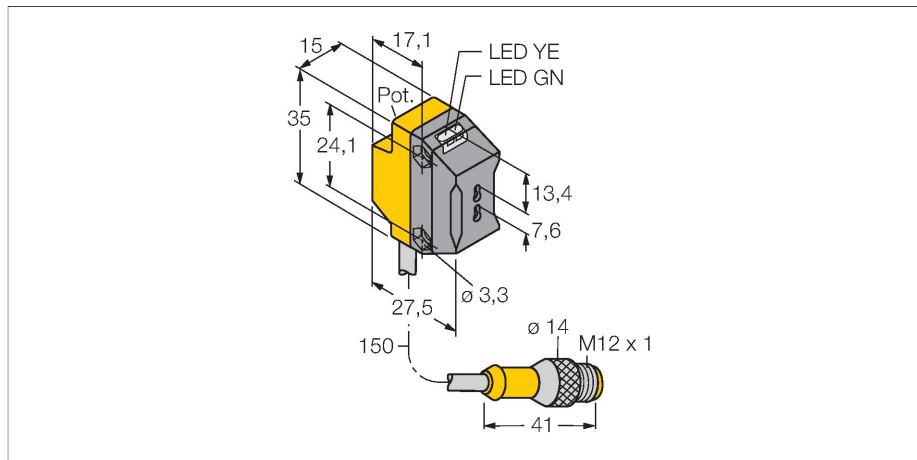

Technical data



Type	QS18VP6FPQ5
ID	3069869
Optical data	
Function	Fiber optic sensor
Operating mode	Plastic fiber
Fiber-optic type	plastic
Light type	Red
Wavelength	660 nm
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U _{ss}
DC rated operational current	≤ 100 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Output function	NO/NC, PNP
Current output	100 mA
Switching frequency	≤ 800 Hz
Readiness delay	≤ 100 ms
Response time typical	< 0.6 ms
Setting option	Potentiometer
Mechanical data	
Design	Rectangular, QS18
Dimensions	Ø 18 x 27.5 x 15 x 34.5 mm
Housing material	Plastic, ABS
Lens	Acrylic
Electrical connection	Cable with connector, M12 x 1, 0.15 m, PVC



Features

- Cable with male end, M12 × 1, 4-pin, PVC, 150 mm
- Protection class IP67
- LED all-round visible
- Sensitivity adjusted via potentiometer
- Operating voltage: 10...30 VDC
- PNP switching output, changeover

Wiring diagram



Functional principle

Glass or plastic fibers are the optimum choice for high-temperature applications and narrow spaces. Fiber optics transfer the light from the sensor to a remote object. Individual fibers are used for opposed mode sensing, whereas bifurcated fibers are suited for retroreflective or diffuse mode sensing.

Excess gain curve
Excess gain in relation to the distance for opposed mode sensor (glass fibers IT23S and plastic fibers PIT46U)

Technical data

Number of cores	4
Ambient temperature	-20...+70 °C
Protection class	IP67
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green, Flashing
Excess gain indication	LED, yellow, flashing
Tests/approvals	
MTTF	965 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE, cURus



Accessories

SMBQS18A

3069721

Mounting bracket, stainless steel, for 18 mm thread

SMBQS18AF


3067467


Mounting bracket, stainless steel, for 18 mm thread

Accessories

Dimension drawing	Type	ID	
Technical drawing of the RKC4.4T-2/TEL connection cable. The drawing shows a side view of the female M12 connector with a 4-pin configuration. Dimensions include a connector diameter of 15 mm, a connector length of 11.5 mm, a total cable length of 42 mm, and a cable diameter of 5 mm. The cable is labeled with 'RKC4.4T-2/TEL' and '14'.	RKC4.4T-2/TEL	6625013	Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com
Technical drawing of the WKC4.4T-2/TEL connection cable. The drawing shows a side view of the female M12 connector with a 4-pin configuration. Dimensions include a connector diameter of 15 mm, a connector length of 26.5 mm, a total cable length of 32 mm, and a cable diameter of 5 mm. The cable is labeled with 'WKC4.4T-2/TEL' and '14'.	WKC4.4T-2/TEL	6625025	Connection cable, female M12, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

Accessories

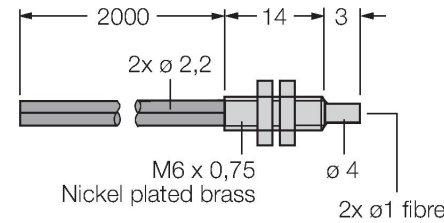Dimension drawing	Type	ID	
	PBT46U	3025967	Plastic fiber-optic sensor, operating mode: Diffuse mode, threaded sleeve M3 x 0.75 mm, field wireable wire without end tip, polyethylene sheath, ambient temperatures -30 °C...+70 °C

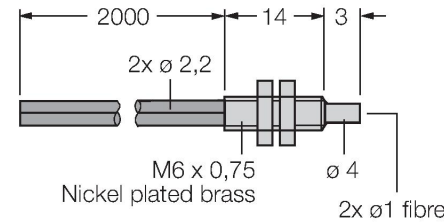

	PIT46U	3026034	Plastic fiber-optic sensor, operating mode: Opposed mode, threaded sleeve M3 x 0.5 mm, field wireable wire without end tip, polyethylene sheath, ambient temperatures -30 °C...+70 °C
--	--------	---------	---

