


QS30EXQP

Photoelectric Sensor – Opposed Mode Sensor (Emitter)

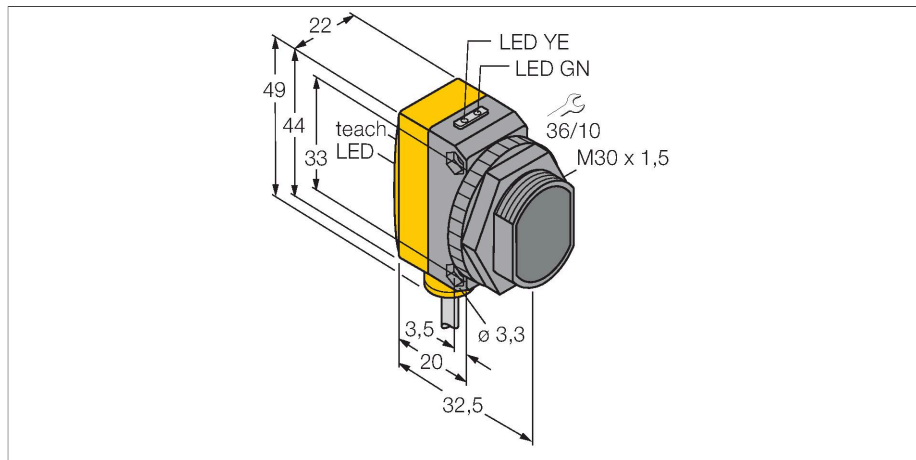

Technical data




Type	QS30EXQP
ID	3074870
Optical data	
Function	Opposed mode sensor
Operating mode	Emitter
Light type	IR
Wavelength	875 nm
Range	0...213000 mm
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U _{ss}
No-load current	≤ 70 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Readiness delay	≤ 100 ms
Response time typical	< 30 ms
Mechanical data	
Design	Rectangular with thread, QS30
Dimensions	Ø 30 x 35 x 22 x 49 mm
Housing material	Plastic, Thermoplastic material, Yellow
Lens	plastic, Zeonex
Electrical connection	Cable with connector, M12 × 1, 0.15 m, PVC
Number of cores	5
Ambient temperature	-20...+60 °C
Protection class	IP67
Power-on indication	LED, Green



Features

- Cable with male end, M12 × 1, 5-pin, PVC, 150 mm
- Protection class IP67
- LED all-round visible
- Selectable operating frequency, protection against crosstalk
- Emitter LED, switchable
- Operating voltage: 10...30 VDC

Wiring diagram



Functional principle


Opposed mode sensors consist of an emitter and receiver. They are installed opposite to each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Large distance operation is

Technical data

Excess gain indication	LED
Tests/approvals	
MTTF	402 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE

possible due to an excellent light/dark contrast and an extremely high excess gain.

Excess gain curve
Excess gain in relation to the distance

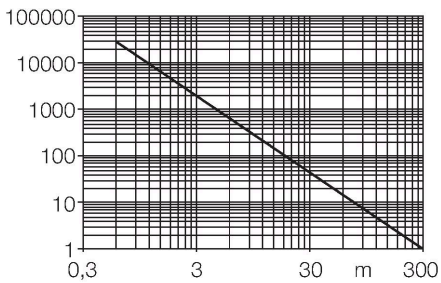

Accessories

SMB30A3032723

Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread

SMBQS30L3002809

Mounting bracket, stainless steel, for QS30 series

SMB30MM3027162

Mounting bracket, rectangular, stainless steel, for sensors with 30 mm thread, wide holes for accurate alignment

SMB30SC3052521

Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable

Accessories

Dimension drawing	Type	ID	
WKC4.5T-2/TEL		6625028	Connection cable, female M12, angled, 5-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

Dimension drawing	Type	ID	
	RKC4.5T-2/TEL	6625016	Connection cable, female M12, straight, 5-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

