


S18-2VPLP-Q8

Photoelectric Sensor – Retroreflective Sensor with Polarizing Filter




Technical data

Type	S18-2VPLP-Q8
ID	3042147
Optical data	
Function	Retroreflective Sensor
Operating mode	Polarized
Reflector included in delivery	no
Light type	Red polarized
Wavelength	624 nm
Range	150...6000 mm
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U _{ss}
No-load current	≤ 16 mA
Short-circuit protection	yes / Cyclic
Reverse polarity protection	yes
Output function	Complementary contact, PNP
Readiness delay	≤ 100 ms
Response time typical	< 1.5 ms
Mechanical data	
Design	Tube, S18
Dimensions	Ø 18 x 73 mm
Housing material	Plastic, Thermoplastic material
Lens	Acrylic
Electrical connection	Connector, M12 × 1, PVC
Number of cores	4
Ambient temperature	-40...+70 °C

Features

- Male M12 × 1, 5-pin
- Protection class IP67
- Ambient temperature: -40...+70 °C
- Visible red LED light
- Operating voltage: 10...30 VDC
- PNP switching output, changeover

Wiring diagram





Functional principle

Retroreflective sensors have emitter and receiver incorporated in the same housing. The light beam of the emitter is directed towards a reflector which returns the light back to the receiver. A target is detected when it interrupts this beam. Retroreflective sensors have a high function gain and good contrast performance. Furthermore, only one device has to be installed and wired.

Technical data

Protection class	IP67
Power-on indication	LED, Green
Switching state	2 × LEDs, Yellow
Error indication	Flashing
Excess gain indication	LED
Alarm display	Flashing
Tests/approvals	
Approvals	CE

Excess Gain Curve

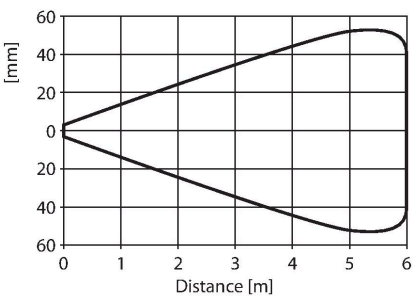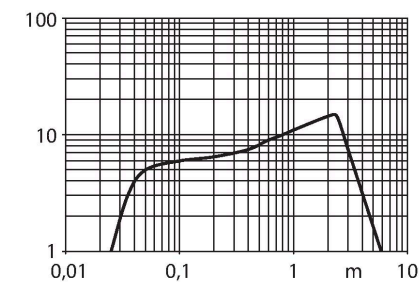

Accessories

MW-186945004


Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)

BST-18N6947215



Mounting clamp for threaded barrel sensors, without dead-stop; material: PA6

Accessories

Dimension drawing	Type	ID	
Dimension drawing of RKC4.5T-2/TEL cable. Connector: M12 x 1, 5-pin, 14mm length. Cable length: L. Stripping length: 50mm.	RKC4.5T-2/TEL	6625016	Connection cable, female M12, straight, 5-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com
Dimension drawing of WKC4.5T-2/TEL cable. Connector: M12 x 1, 5-pin, 14mm length. Cable length: L. Stripping length: 50mm.	WKC4.5T-2/TEL	6625028	Connection cable, female M12, angled, 5-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

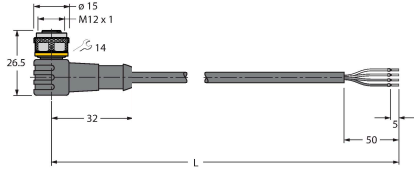Dimension drawing	Type	ID	
	RKC4.4T-2/TEL	6625013	Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com
	WKC4.4T-2/TEL	6625025	Connection cable, female M12, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

Accessories

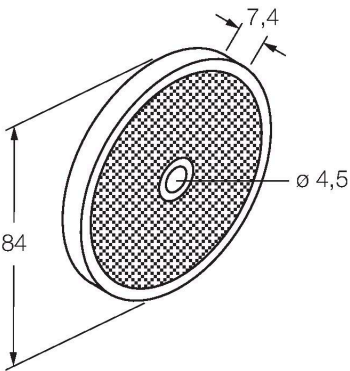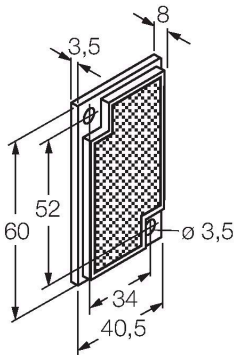Dimension drawing	Type	ID	
	BRT-84	3058979	Round reflector, reflection coefficient 1.4, material acrylic, ambient temperature -20 ... +60 °C
	BRT-60X40C	3044997	Rectangular reflector, reflection coefficient 1.48, material: acrylic, ambient temperature -20...+60 °C