


SM312FMHIQD

Photoelectric Sensor – Photoelectric Sensor for Glass Fibers

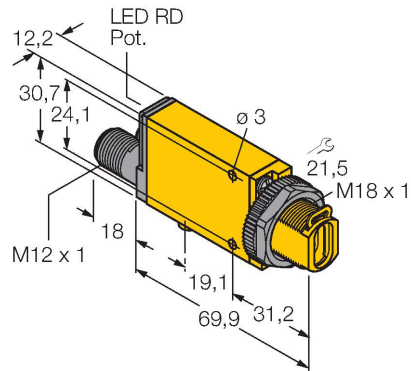


Technical data

Type	SM312FMHIQD
ID	3066183
Optical data	
Function	Fiber optic sensor
Operating mode	Glass fiber
Fiber-optic type	glass
Light type	IR
Wavelength	880 nm
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U _{ss}
DC rated operational current	≤ 150 mA
No-load current	≤ 25 mA
Output function	NO contact, PNP/NPN
Switching frequency	≤ 500 Hz
Readiness delay	≤ 100 ms
Overcurrent release	> 220 mA
Mechanical data	
Design	Rectangular, Mini Beam
Dimensions	71.3 x 12.3 x 30.7 mm
Housing material	Plastic, PBT, Yellow
Electrical connection	Connector, M12 × 1
Ambient temperature	-20...+70 °C
Protection class	IP67
Switching state	LED, Red
Excess gain indication	LED, red, flashing

Features

- Male M12 × 1, 4-pin
- Protection class IP67
- Sensitivity adjusted via potentiometer
- Alignment indicator
- Operating voltage: 10...30 VDC
- Switching output, bipolar
- Light/dark operation

Wiring diagram



Functional principle

Glass or plastic fibers are the optimum choice for high-temperature applications and limited spaces. Optical fibers transfer the light from the sensor to a remote object. Individual fibers are used for opposed sensing mode, whereas bifurcated fibers are suited for diffuse sensing mode.


Excess gain curve
Excess gain in relation to distance

Technical data

Tests/approvals

Approvals


CE, cURus, CSA

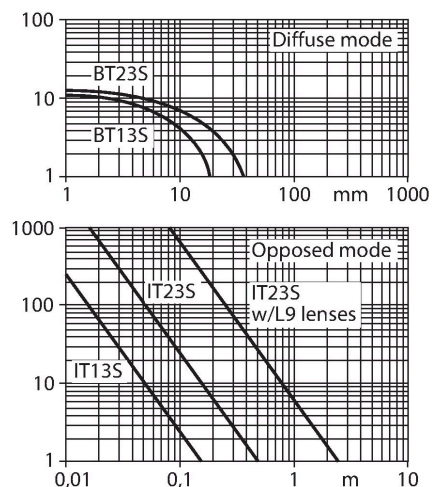

Accessories

SMB18A


3033200



Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

SMB18AFAM10


3012558



Mounting bracket, material VA 1.4401, for M10 x 1.5 thread, thread length 18 mm

SMB18SF


3052519



Mounting bracket, PBT black, for sensors with 18 mm thread, rotatable

SMB312B


3025519



Mounting bracket, stainless steel, for MINI-BEAM NAMUR


SMB3018SC


3053952



Mounting bracket, PTB black, for sensors with 18 mm thread

Accessories

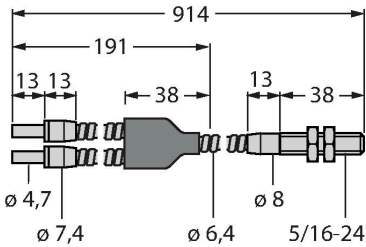Dimension drawing	Type	ID	
	BT23S	3017276	Glass fiber, sensing mode: Diffuse mode, threaded sleeve (brass), bundle diameter 3.2 mm, flexible stainless steel jacket, ambient temperatures -140...+250 °C

	IT23S	3017355	Glass fiber, sensing mode: Opposed mode, threaded sleeve (brass), bundle diameter 3.2 mm, flexible stainless steel jacket, ambient temperatures -140...+250 °C
--	-------	---------	--